



LET'S GET  
YOU SET UP

# USER GUIDE



## Download the SmartKnight App

On Google Play (Android™) or App Store® (Apple®).  
Open the app, tap "Register" and follow the on-screen instructions



## Add Device

(2.4 GHz only)

To add a device tap the "+" on top right corner, select the product category and follow the on-screen instructions



## Enjoy

Enjoy your connected product. For more in-depth instructions, please see section titled "Wi-Fi Control" in this leaflet



## Setting up Voice Assistants



Enable the "SmartKnight" skill in either voice assistant and follow the app instructions to control your device(s) with your voice.

Visit <http://www.mlaccessories.co.uk> for further assistance



## GENERAL INSTRUCTIONS

**These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.**


**These instructions should be used to aid installation of the following products:  
SN9KW / CU9KW**

## SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- Do not overload this accessory or subject it to conditions outside its rating
- This product is Class I and must be earthed
- This product is IP20 rated

## INSTALLATION

- Always ensure the wall surface is flat and smooth for optimum installation
- Provide power to the required point of installation
- Connect to the mains supply ensuring the correct polarity is observed: L - Live (Brown), E - Earth (Green/Yellow), N - Neutral (Blue), see Fig. 1

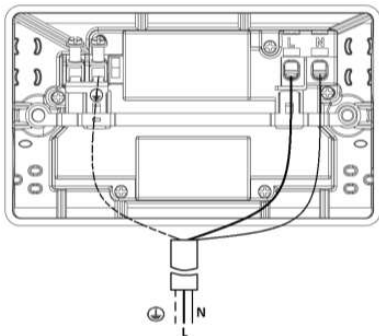

**Fig. 1**

- An earth connection must be made to the earth terminal of the socket. Use green/yellow sleeving on earth conductors that are not insulated
- Check all electrical connections are secure with no loose strands of cable
- Fit the unit into a suitable wall box taking care not to compress, damage or trap any cables, and secure with the screws provided
- Switch on and check for correct operation

## WI-FI CONTROL

**Note** – Please note that these instructions were correct at the time of printing, for the latest version please visit our website [www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

- Download the SmartKnight app from Google Play Store or the Apple App Store
- Once the app has downloaded, open the app, tap “Register” then follow the on screen instructions
- To add a socket to the app, switch on the power and tap “+” on the top right corner
- Select “Socket (Wi-Fi)”
- If the indicator is flashing rapidly, skip the reset procedure and tap “Confirm the indicator is flashing rapidly”. If the indicator is not flashing, follow the on-screen instructions to reset
- Connect to the desired Wi-Fi network, tap “Confirm” and the app will start searching for devices. Please note that only 2.4 GHz networks are supported and make sure that your device is connected to the same Wi-Fi network
- After the socket has successfully been added to the app, it can be named and added to a room. After naming the socket, tap “Done”

**Note** – Please note that the indicators on this product will flash red when the Wi-Fi connection is not strong enough

## WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

Please note that we do not recommend our 13A sockets be used for Electric Vehicle (EV) charging for prolonged periods.

## GENERAL

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

## WARRANTY

This product has a warranty of 2 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.



Manufacturers Declaration of Conformity  
For ML Accessories (Knightsbridge)  
Electrical products in accordance with CE marking

ML Accessories Ltd. Declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

#### CE marking legislation

#### In Accordance with the following Directives:

2014/35/EU	Low Voltage Directive
2014/30/EU	EMC Directive
2014/53/EU	Radio Equipment Directive

#### Including Legislation

1907/2006	REACH
2015/863	RoHS
2021/341	ERP

#### Safety Standards

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website [www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The product complies with all essential requirements of the directives.

Handwritten signature of Scott Brewer in black ink.

Scott Brewer  
Technical Manager

Handwritten signature of Catherine Connolly in black ink.

Catherine Connolly  
CEO



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT

This declaration becomes invalid if technical or operational modifications are introduced without ML Accessories Ltd. written consent.



Manufacturers Declaration of Conformity  
For ML Accessories (Knightsbridge)  
Electrical products in accordance with UKCA marking

ML Accessories Ltd. declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

**UKCA marking legislation**

UK SI 2016 No. 1091	Electro Magnetic Compatibility Regulations 2016
UK SI 2016 No. 1101	The Electrical Equipment (Safety) Regulations 2016
UK SI 2012 No. 3032	Restriction of the use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012
UK SI 2017 No. 1206	Radio Equipment regulations 2017
UK SI 2021 No. 1095	The Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations 2021

**Included Legislation**

UK SI 2008 No. 2852	UK REACH
UK SI 2013 No. 3113	WEEE

**Safety Standards**

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website [www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The products comply with all essential requirements of the directives.

Scott Brewer  
Head of Technical

Catherine Connolly  
CEO



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT

This declaration becomes invalid if technical or operational modifications are introduced without ML Accessories Ltd. written consent.



**Supplied By:**

**(UK) Manufacturer**

**ML Accessories Ltd**, Unit E Chiltern Park, Boscombe Road, Dunstable LU5 4LT,  
[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

**(EU) Authorised Representative**

**nnuks Holding GmbH**, Niederkasseler Lohweg 18,  
40547 Düsseldorf, Germany,  
Email: [eprel@nnuks.com](mailto:eprel@nnuks.com)



**ML**  
ACCESSORIES LTD



**UK  
CA** **CE**

