

AX71230




Gate leaves of up to 7 m



Ideal solution for applying to gates in single homes or apartment blocks

- Compliance tested to meet UK standards.
- Available in reversible and irreversible mode.
- Fully covered and protected endless screw.
- Encoder technology for controlling slow-downs.
- Adjustable mechanical stops for memorizing gate travel.
- Die-cast aluminum supporting half-shells

Dimensions (mm)

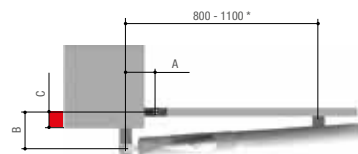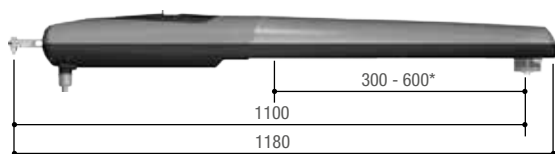

Operational limits

MODEL	AX71230						
Max. width of leaf (m)	**7	**6	*5	*4	3	2,5	2
Max. weight of leaf (kg)	300	350	400	500	700	800	1000

Application dimensions (mm)

MODELS	AX71230		
LEAF OPENING (°)	A	B	C Max.
90	200	220	150
120	220	220	100

NOTES:

* It is obligatory to fit an electric lock on the gate leaf.

** Do not fit panels on gate leaves longer than 5 m. With reversible versions, when the gate is open, the gate leaf could close back up if there is a strong wind.

Technical characteristics

MODELS	AX71230
Protection rating (IP)	44
Power supply (V - 50/60 Hz)	230 AC
Power supply to motor (V)	230 AC 50/60 Hz
Absorption (A)	1,5
Power (W)	175
Maneuvering time at 90° (s)	40
Duty/cycle (%)	30
Torque (Nm)	500 ÷ 4500
Operating temperature (°C)	-20 ÷ +55
Motor's heat protection (°C)	150