



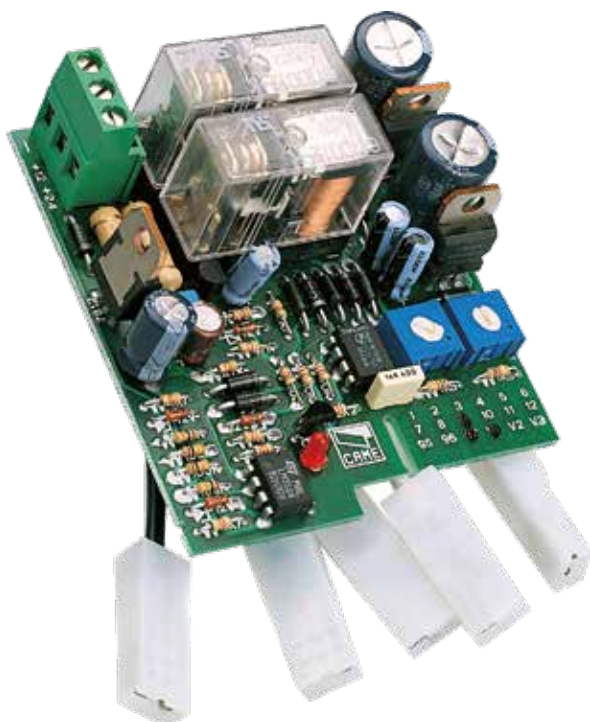

Circuit board for emergency operation and battery charging

- Suitable for G3750, G3751, G6500 and G6501.
- The LB38 battery-charging board was designed as an emergency device for the ZL38 command board

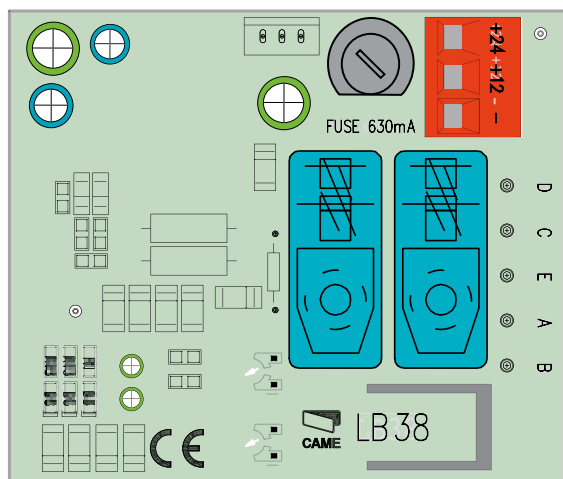

Operational limits

Technical characteristics

MODELS	LB38
Absorption at rest	180 MA
Charge voltage 24V	27V
Charge voltage 12V	13.5V
Supply voltage	24V
Charge current	100A max
Operating temperature	-20°C - +55°C

* The speed must be adjusted to the boom's dimensions