

G6000

Net clearance width of up to 6.5m


+
24
-



Ideal solution for medium and large passages for residential and industrial use

- Ideal for private or public parking.
- Also available in AISI 304 steel.
- It can be installed either to the right or to the left and the mounting operations are simple and quick.
- A truly complete range of accessories allows you to customise your installation to ensure safety and ease of use.
- The special joint allows the barrier to be installed even when the height would not allow the opening of the boom, as in the underground parking garages.
- RAL 2004 finish.R700 accessory.

Dimensions (mm)

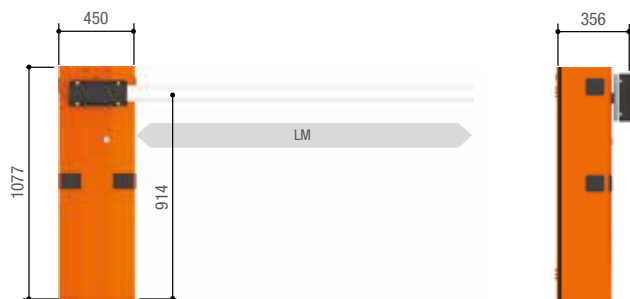

LM = Max. net clearance width

Operational limits

MODELS	G6000
Max. net clearance width (m)	6,5

Technical characteristics

MODELS	G6000
Protection rating (IP)	54
Power supply (V - 50/60 Hz)	230 AC
Power supply to motor (V)	24 DC
Absorption (A)	15 Max.
Power (W)	300
Opening time at 90° (s)	4 ÷ 8
Duty/cycle (%)	HEAVY-DUTY SERVICE
Torque (Nm)	600
Operating temperature (°C)	-20 ÷ +55
Motor's heat protection (°C)	-