




NEXT GENERATION SWITCHMODE 12V MONITORED PSUs

POWER SUPPLIES



12V POWER SUPPLY

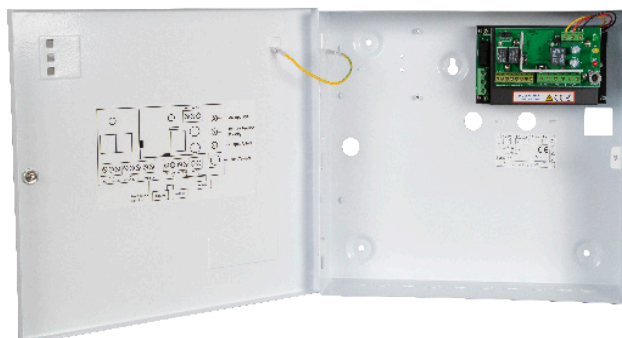

SPECIFICATION

1202SM-2MP / 1203SM-2MP / 1205SM-2MP

- Full current to load
- 13.8VDC regulated output
- Additional battery charging current
- Deep discharge battery protection
- Internal current limiting
- Short circuit protection with auto restart
- 230V fused input
- Mains transient protection
- Compliant to EMC EN61000-6-1 & 3
- Available in 2, 3 and 5 AMP

Fault outputs:

- Mains fail
- Battery missing

Voltage free terminals for Front Tamper

FEATURES

1202SM-2MP / 1203SM-2MP / 1205SM-2MP

- Switchmode technology
- Constructed in a modular arrangement
- Mild steel construction
- White powder coated
- LED Indicators (mains, batt, output)
- Separate fused main connectors
- Full electronic protection
- Onboard tamper protection
- Converts power more efficiently
- Multiple cable entry
- Wiring instructions included
- Allows for 1 x 9Ah batteries

OTHER PRODUCTS

KP50



VRM2



ML600



EDR-2N



DIMENSIONS

1202SM-2MP / 1203SM-2MP / 1205SM-2MP

- 310H x 340W x 80D (mm)
- 3.07Kg Boxed
- 2.84Kg Unboxed

CONTENTS

1202SM-2MP / 1203SM-2MP / 1205SM-2MP

- Power Supply Unit
- 2 x Battery Leads (1 x Red, 1 x Black)
- 1 x Earth Lead - Connected



Manufactured by a BSIA Member