



INSTALLATION & MAINTENANCE MANUAL

SL20CCTW / SL20CCTB
SL30CCTW / SL30CCTB

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid the installation of the following products:

SL20CCTW / SL20CCTB / SL30CCTW / SL30CCTB

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse, or circuit breaker
- Please note the IP (Ingress Protection) rating of this luminaire when deciding the location for installation
- This product is Class II double insulated
- This product is IP65 rated

INSTALLATION

- Provide power to the required point of installation (refer to BS7671 for correct cabling methods). Suitable IP rated junction boxes should be used where required
- Round cable should be used for the mains supply. The use of flat cable will cause water ingress to the fitting
- Remove the base plate from the luminaire by removing the centre screw, see Fig.1
- Using the base plate as a template, mark the location for, and drill the fixing holes ensuring not to infringe with any gas/water pipes or electrical cables
- Feed the mains cable through the rubber grommet to retain IP rating, and secure the base plate to the surface using the screws provided

- Connect the luminaire to the mains supply ensuring the correct polarity is observed (see Fig. 1): L - Live (brown), E - Earth (green/yellow), N - Neutral (blue). The earth terminal is non-functional and only provided for convenience

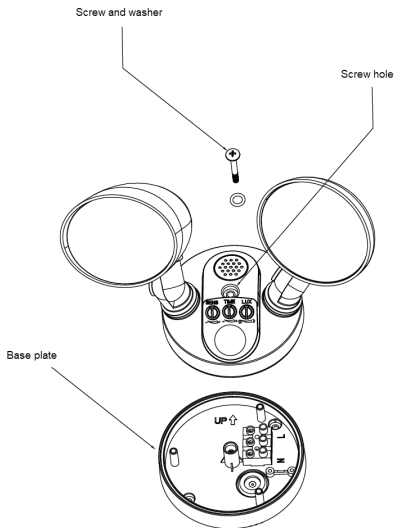


Fig. 1

- Choose the colour temperature with the aid of the 3-position switch on the back
- Replace the body of the luminaire to the base plate and fix it with the screw and washer
- Switch on and check for correct operation

SENSOR SETTINGS



- This controls the range of the sensor from a minimum of 1m to a maximum of 8m



- The time can be set from a minimum of 6 seconds to a maximum of 10 minutes



- This controls the light level at which the sensor will operate when motion is detected, and it can be set from a minimum of 10 lux to a maximum of 300 lux

Manual override can be activated by switching Off and On three times within 2 seconds. This will turn the luminaire permanently on. To cancel and return to automatic mode, switch the power off for at least 10 seconds


WARNING

This luminaire must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product contains a light source of energy efficiency class E to Regulation (EU) No. 2019/2015.

This product contains non-replaceable light sources and non-replaceable control gear.

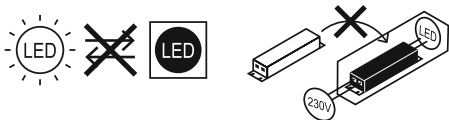

Clean the external surfaces with a damp cloth using a mild solution of detergent and warm water only, do not use aggressive cleaning products or solvents that may damage the product.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see the website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 5 years from the date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

Supplied By:

(UK) Manufacturer

ML Accessories Ltd, Unit E Chiltern Park, Boscombe Road,
Dunstable LU5 4LT, www.mlaccessories.co.uk

(EU) Authorised Representative

nnuks Holding GmbH, Niederkasseler Lohweg 18, 40547
Düsseldorf, Germany

Email: eprel@nnuks.com



ML Accessories Limited LU5 4LT
www.mlaccessories.co.uk