

INSTALLATION & MAINTENANCE MANUAL

**TPB14SLED**

## GENERAL INSTRUCTIONS

**These instructions should be read carefully and retained after installation by the end user for future reference and maintenance**

**These instructions should be used to aid installation of the following luminaire:**

**TPB14SLED**


## SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is Class II double insulated
- This product is IP44 rated

## INSTALLATION

Note - Microwave sensors may not be suitable for all installations, for example enclosed spaces, as they are able to detect movement through non-metallic surfaces like plasterboard and thin doors.

- Provide power to the required point of installation (refer to BS7671 for correct cabling methods). Suitable IP rated junction boxes should be used where required
- Remove the diffuser by rotating the bezel anti-clockwise (see Fig. 1)
- Loosen the three LED plate screws (see Fig. 2)




**Fig. 1**



**Fig. 2**

- Remove the LED plate and disconnect from the driver via the DC socket (see Fig. 3)

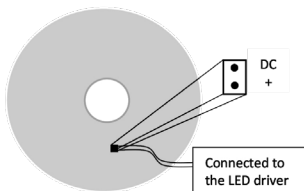

**Fig. 3**

- Drill the fixing holes in the rear of the fitting. Mark the location of the fixing holes and drill ensuring not to infringe with any gas/water pipes or electrical cables
- Feed the mains cable through the rubber grommet to retain IP rating, and secure the baseplate to the surface
- Connect the luminaire to the mains supply ensuring the correct polarity is observed (see Fig. 4)  
L – Live (brown), N – Neutral (blue)

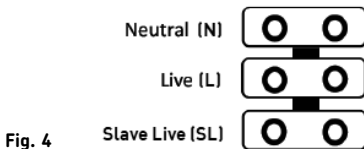


Fig. 4

- The additional terminal called Slave Live (SL) is available to enable the sensor to power on additional luminaires. A max. LED load of 500W can be controlled by the sensor
- See below for adjustment of the sensor settings
- Reconnect the LED plate to the driver via the DC socket
- Refasten the three LED plate screws
- Reattach the diffuser by rotating clockwise
- Switch on and check for correct operation

## SENSOR LAYOUT

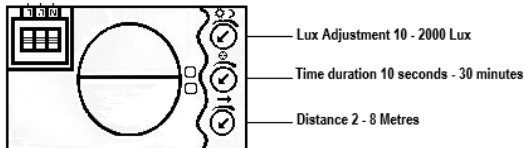


Fig. 5

## WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed

## GENERAL

This product contains a light source of energy efficiency class F to Regulation (EU) No 2019/2015.

This product contains an LED light source which can be replaced by the end user and a control gear which can be replaced by a professional.



Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

Do not use any source of high-pressure washers to maintain or clean this luminaire.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

## WARRANTY

This product has a warranty of 3 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

# Knightsbridge

Manufacturers Declaration of Conformity  
For ML Accessories (Knightsbridge)  
Electrical products in accordance with CE marking

ML Accessories Ltd. Declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

## CE marking legislation

### In Accordance with the following Directives:

2014/35/EU	Low Voltage Directive
2014/30/EU	EMC Directive
2014/53/EU	Radio Equipment Directive

### Including Legislation

1907/2006	REACH
2015/863	RoHS
2021/341	ERP

### Safety Standards

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website [www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The product complies with all essential requirements of the directives.



Scott Brewer  
Technical Manager



Catherine Connolly  
CEO



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT

This declaration becomes invalid if technical or operational modifications are introduced without ML Accessories Ltd. written consent.

# Knightsbridge

## Manufacturers Declaration of Conformity For ML Accessories (Knightsbridge) Electrical products in accordance with UKCA marking

ML Accessories Ltd. declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

### UKCA marking legislation

UK SI 2016 No. 1091	Electro Magnetic Compatibility Regulations 2016
UK SI 2016 No. 1101	The Electrical Equipment (Safety) Regulations 2016
UK SI 2012 No. 3032	Restriction of the use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012
UK SI 2017 No. 1206	Radio Equipment regulations 2017
UK SI 2021 No. 1095	The Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations 2021

### Included Legislation

UK SI 2008 No. 2852	UK REACH
UK SI 2013 No. 3113	WEEE

### Safety Standards

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website [www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The products comply with all essential requirements of the directives.



Scott Brewer  
Head of Technical



Catherine Connolly  
CEO



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT




**Supplied By:**

**(UK) Manufacturer**

**ML Accessories Ltd**, Unit E Chiltern Park, Boscombe Road, Dunstable LU5 4LT,  
[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

**(EU) Authorised Representative**

**nnuks Holding GmbH**, Niederkasseler Lohweg 18,  
40547 Düsseldorf, Germany,  
Email: [eprel@nnuks.com](mailto:eprel@nnuks.com)



**ML Accessories Limited LU5 4LT**  
[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

DCJUL22\_V3