

# Knightsbridge

## INSTALLATION & MAINTENANCE MANUAL SK0011



## GENERAL INSTRUCTIONS

**These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.**


**These instructions should be used to aid installation of the following product:  
SK0011**

## SAFETY


- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- Do not overload this accessory or subject it to conditions outside its rating. It is suitable for a maximum load of 13A
- This product is Class I and must be earthed
- This product is IP20 rated

## INSTALLATION

- Provide power to the required point of installation
- Locate a suitable place to mount the product. It can be fitted into a surface of max. 30mm thickness
- Cut an 18-20mm hole in the surface
- Remove the washer, spring washer and nut (see Fig. 1)
- Insert the product through the hole, and turn to desired orientation
- Tighten the spreader plate, washer, spring washer and nut onto the underside of the surface (see Fig. 2)
- Wire the mains cable ensuring correct polarity is observed - Live (brown), Neutral (blue) and Earth (green and yellow)
- Switch on and check for correct operation

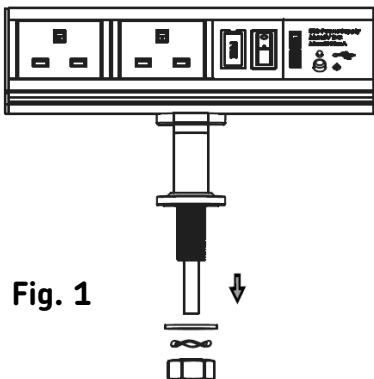

**Fig. 1**

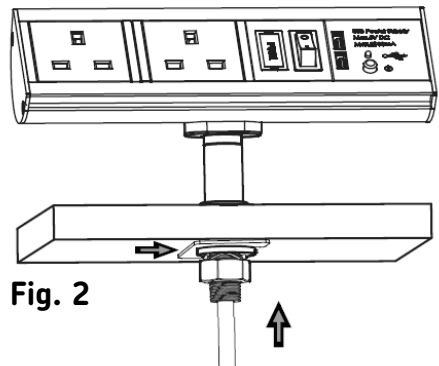

**Fig. 2**

## USB CHARGING FUNCTION

This product is designed for charging portable USB devices only, and contains a short circuit and overload protection feature. If there is no power from the USB socket, unplug the connected device. Check to ensure the USB socket and USB device have not come into contact with water, liquid or debris and the cable to the device is not damaged. With no device connected to the USB socket, it will automatically reset and be ready for use

## WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed. Please note this kind of damage will void the warranty

## GENERAL

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product

## WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

# **Knightsbridge**



ML Accessories Limited  
LU5 4LT

ACCESSORIES LTD [www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

DCFEB19\_V1