

INSTALLATION & MAINTENANCE MANUAL

**LEDBAT9 / LEDBAT17**  
**LEDBAT22 / LEDBAT26**

## GENERAL INSTRUCTIONS

**These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.**

**These instructions should be used to aid installation of the following products:**

**LEDBAT9 / LEDBAT17 / LEDBAT22 / LEDBAT26**

## SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is for indoor use only
- This product is Class II double insulated
- This product is IP20 rated



## INSTALLATION

Note - If this product is being used in conjunction with an external PIR or sensor, please confirm with the manufacturer of the sensors that they are compatible with LED luminaires.

- Provide power to the required point of installation
- Mark the location of the fixing holes for the mounting clips. The mounting clips should be spaced so as to distribute the weight of the luminaire evenly
- Drill the holes for the mounting clips ensuring not to infringe with any any gas/water pipes or electrical cables

- Fix the clips to the surface using suitable fixings
- Open the terminal cover, and connect the luminaire to the mains supply ensuring the correct polarity is observed: L - Live (brown), N - Neutral (blue) (see Fig. 1)

**Fig. 1**

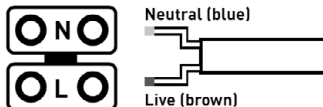

- Refasten the terminal cover, and fix the luminaire to the mounting brackets
- Switch on and check for correct operation


## **WARNING**

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

## GENERAL

This product contains a light source of energy efficiency class D to Regulation (EU) No 2019/2015.

This product contains a non-replaceable LED light source and control gear.

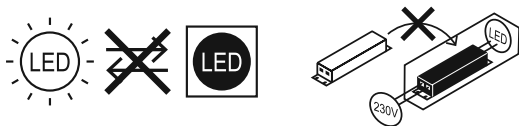

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

## WARRANTY

This product has a warranty of 5 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

**INTERNATIONAL  
CONTACT DETAILS**



**230V  
50Hz**

**IP20**



**ML**  
ACCESSORIES LTD



**UK  
CA** **CE**



**52**

**ML Accessories Limited LU5 4LT**  
**[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)**