



INSTALLATION & MAINTENANCE MANUAL

SKRECFC

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

**These instructions should be used to aid installation of the following product:
SKRECFC**

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- If this product is wall-mounted, the guidance in BS7671 must be followed regarding cables concealed in walls
- If the plug is removed, the overcurrent protection offered by the plug must be reinstated by terminating into a fused connection unit or similar, with a 13A fuse
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- Do not overload this accessory or subject it to conditions outside its rating
- This product is Class I and must be earthed
- This product is IP20 rated

INSTALLATION

Desk / worktop mounting

- Locate a suitable place to mount the product. The mounting surface should be at least 15mm thickness
- Cut a 323 x 65mm hole in the surface ensuring not to infringe with any gas/water pipes or electrical cables
- Fix the brackets into the end of the hole (see Fig. 1) using the woodscrews provided




Fig. 1

- Remove the cover plates from the front face of the product using a small flat screwdriver (see Fig. 2)




Fig. 2

Remove cover plates

- Place the unit into the hole and attach to the brackets using the M4 screws provided
- Refit the cover plates
- Connect to mains power supply via the pre-wired cable and plug
- Switch on and check for correct operation

Wall mounting

- If wall-mounting into plasterboard, it may be necessary to fit a timber stud or batten behind the cut-out to support the product as plasterboard alone does not have sufficient strength
- Cut a suitable hole in the wall ensuring not to infringe with any joists, gas / water pipes or electrical cables; the hole should be 323 x 65mm
- Install a timber stud or batten at a depth of 60mm to allow room for the flex (see Fig. 3); or at a depth of 45mm if a cut-out in the batten is made for the flex

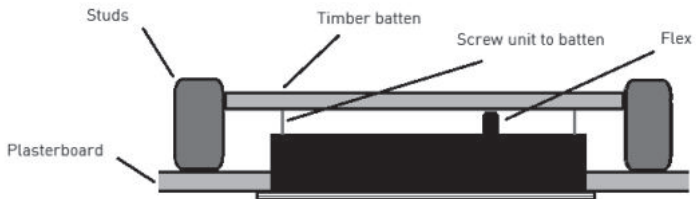


Fig. 3

- If mounting into masonry, cut a hole 323 x 65mm and 45mm deep, with an extra channel for the flex
- Install as above, discarding the brackets and using suitable screws (not provided) for fixing the unit to the timber batten, or to the masonry

USB CHARGING FUNCTION

This product is designed for charging portable USB devices only and contains a short circuit and overload protection feature. If there is no power from the USB socket unplug the connected device. Check to ensure the USB socket and USB device have not come into contact with water, liquid or debris and the cable to the device is not damaged. With no device connected to the USB socket it will automatically reset and be ready for use.

WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.
Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

WARRANTY

This product has a warranty of 2 years from the date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.



ML
ACCESSORIES LTD



**UK
CA** **CE**



Made in China

DCNOV20_V1