


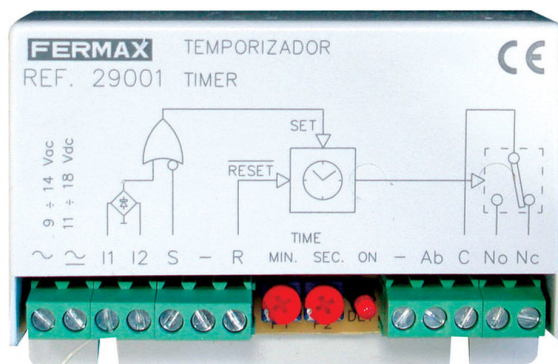

Product Code

F29001

TIMER

Reference

29001

EAN

8424299290010

Description.

Description

The timer has the following connections and controls:

- PDT relay to activate the external device (C, No, Nc).
- Potentiometers to adjust the activation time: Minute adjusted potentiometer (P1) and Second adjusted potentiometer (P2).
- Timed Activation Button Connection (S,-): activates the timer relay during the programmed time.
- Button connection for Reset (R,-); Allows the timer to be deactivated before the programmed time has elapsed.
- Direct Activation Button Connection (Ab,-): activates the timer relay when the button connected here is pressed.
- Connection for call activation (I1, I2): allows the calling wire and the negative from the outdoor panel be connected (4+N systems) and activate the time when making a call.

Technical Details

- Power: 9~14 Vac;11~18 Vdc
- Consumption:
 - With 12 Vdc power supply: 20 mA idle, 50 mA active.
 - With 12 Vac power supply: 50 mA idle, 110 mA active.
- Maximum output values:
 - Power (resistive load): 1250VA or 150W
 - Voltage (resistive load): 125 Vdc, 380 Vac.
- Maximum temperature: 0~+65°C
- Timing:

- P1: from 0 to 6 minutes approximately.
- P2: from 1 to 60 seconds approximately.
- Activation by call:
 - Electronic call: 4Vpp~18Vpp.
 - Alternate call: 4Vac~12Vac.

Details.

Weight (kg)	Packaging measurements	Video Door Entry system
0.073	(height x width x depth) cm	Technologie
	9x6,5x2,5	GENERICA

Manuals

- 94918b Temporizador
Ref 29001 V08_08.pdf

Declaration of conformity

- DOCF29001EN.pdf