



INSTALLATION & MAINTENANCE MANUAL

T8LB14 / T8LB15 / T8LB16
T8LB24 / T8LB25 / T8LB26

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

T8LB14 / T8LB15 / T8LB16 / T8LB24 / T8LB25 / T8LB26

Part code	LED tube size	Length (ft)	Length (mm)
T8LB14	T8	4	1225
T8LB15	T8	5	1525
T8LB16	T8	6	1778
T8LB24	T8	4	1225
T8LB25	T8	5	1525
T8LB26	T8	6	1778

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is for indoor use only
- This product is Class I and must be earthed
- This product is IP20 rated

INSTALLATION

NOTE: This fitting is designed and wired for self-ballasted LED T8 tubes requiring 240V AC input voltage (not for use with fluorescent tubes).

- Provide power to the required point of installation
- Unfasten the two screws (see Fig. 1) and remove the cover plate





Fig. 1 (single fitting shown)

- Mark the location of the fixing holes and drill the holes ensuring not to infringe with any gas/water pipes or electrical cables. The fitting can also be mounted over conduit boxes, the distance between fixing centres is 600mm
- Feed the mains cable into the luminaire either through the rear, or by drilling the end cap and using a 20mm compression gland (not included)
- Secure the luminaire to the surface
- Ensuring correct polarity is observed, carefully wire as shown in Fig. 2

Fig. 2

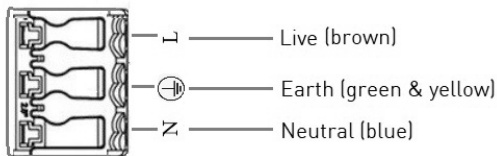

- Fit the T8 lampholders into place at either end of the fitting
- Fit the centre mounting clip onto the cover plate (see Fig. 1, T8LB16 and T8LB26 only) and refit the cover plate securing with the two screws
- Fit a suitable T8 LED lamp
- Switch on and check for correct operation

GENERAL

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the fitting.

This product is dimmable dependent on lamp type.

The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

**INTERNATIONAL
CONTACT DETAILS**



**230V
50Hz**

IP20



ML
ACCESSORIES LTD



**UK
CA** **CE**



52

ML Accessories Limited LU5 4LT
www.mlaccessories.co.uk