



ESPIRE

Product Code: ES1MULV

Description: Smoke and Heat Multi-Sensor Alarm Powered by Mains with a 10 Year Lithium Battery

Technical Specification Multi-Sensor Alarm

Luckinslive 437540269

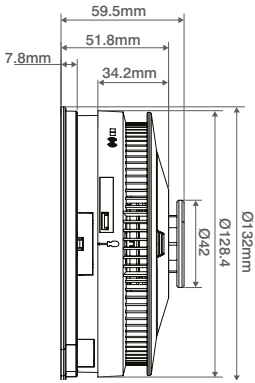

General Information	
Dimensions (mm)	ø132 x 59.5
Colour	White
Materials	UL94-V0 rated UV stabilised ABS
Mounting	Ceiling
Recommended Installation Locations	Living Areas, Loft Areas, Bedrooms, Escape Routes & Stairways
Indication	3 LEDs; Green - Power, Yellow - Fault, Red - Fire
Auto Dim Power LED	Day Mode and Night Mode (Not intrusive to sleep)
Manual Test Button	Checks sensor, electronics & sounder
Weight (Kg)	0.27
Warranty (Years)	5
Technical	
Sensor Type	Multi Sensor; Sensor 1 - Optical Smoke Sensor 2 - Heat
Heat Detection Class	A2
Heat Detection Temperature (°C)	58
Sounder Output (dB)	85 @ 3m
Hush Function	Alarm hush - 10 minutes, Fault hush - 12 hours
Installation Grade	D1
Supply, Power & Backup	
Supply Type	Mains AC with battery backup
Supply Voltage (V AC)	230
Frequency (Hz)	50
Maximum Power Consumption (W)	3.3
Standby Power Consumption (W)	0.5
Battery Backup	Non-replaceable 10 Year Battery
Battery Type	3V Lithium
Battery Size	CR123A
Battery Chemistry	Lithium
Battery Lifetime	10 Year
Interconnectability	
Wired Interconnect Supported	Yes
Maximum Interconnect Wiring Distance (m)	300
RF-LINK Supported	Yes; Requires ES1RF
Maximum Supported Wired & RF-LINK Interconnected Devices	28
Base Type	Anti-Tamper Lock-In Wiring Base
Environment	
Operating Temperature (°C)	0 to +40
Relative Humidity Resistance (%)	95 (non-condensing)

Accessories	Features
ES1RF: Alarm RF-Link Module	Dust compensation
ES1MP: Alarm Masking Plate	Insect mesh
ES1MTW: Alarm Multi Tool (2 Pack) White	24 hour memory function
ES1MTB: Alarm Multi Tool (2 Pack) Black	Clear LED indication status

Unit 7 Target Park, Shawbank Road,
Lakeside, Redditch B98 8YN United Kingdom
T: +44 (0)1527 515150 | F: +44 (0)1527 515143
E: info@espuk.com | W: espuk.com



CLICK OR SCAN

Catalogue



DoC



Installation



Quick Start



CLICK OR SCAN