


NC2011

1200/2000 Series - Accessory - RS485 ARCNet Network Card

General

The NC2011 is an interface board to connect an RS485 copper network directly into the 1200/2000 series fire panels. It is supplied with one NE2011 pre installed.

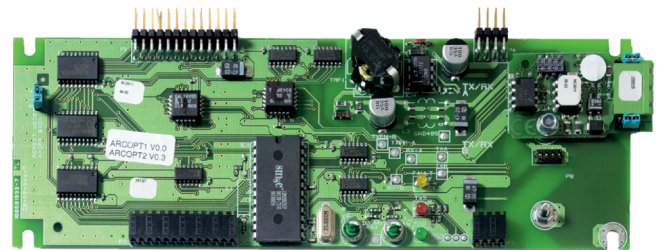

Details

- Allows a RS485 interface on the FP1200/2000
- No configuration required
- Supplied with nuts and washers for easy installation
- Full Class-A ring option available with NE2011
- Mixed network support (copper and fibre) with NE2051

NC2011

1200/2000 Series - Accessory - RS485 ARCNet Network Card

Technical specifications

Electrical

Current consumption	50 mA
---------------------	-------

Physical

Form factor	Medium
Physical dimensions	190 x 64 mm
Net weight	85 g

Environmental

Operating temperature	-10 to +50°C
Storage temperature	-10 to +70°C
Relative humidity	10 to 95%

Regulatory

Certification	EN54-2
---------------	--------



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.