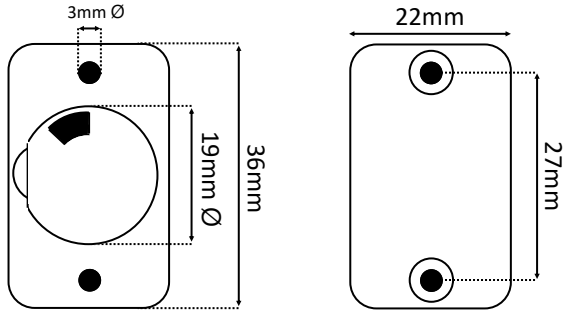
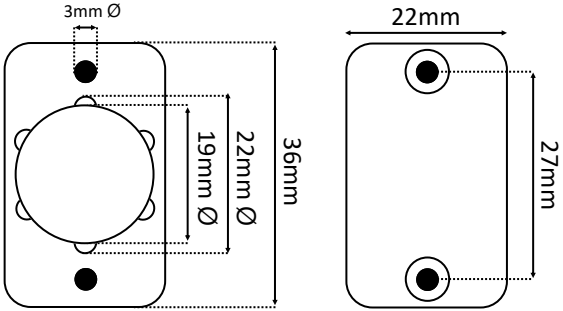
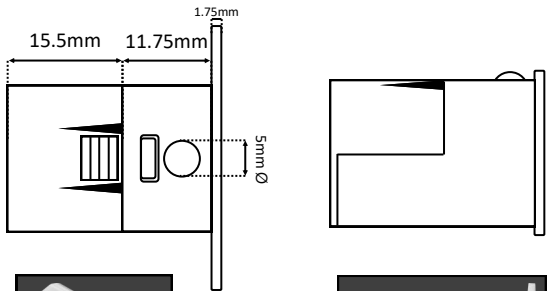
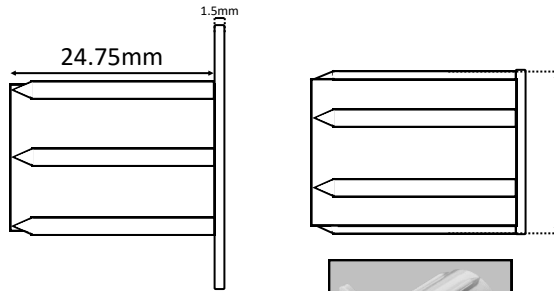



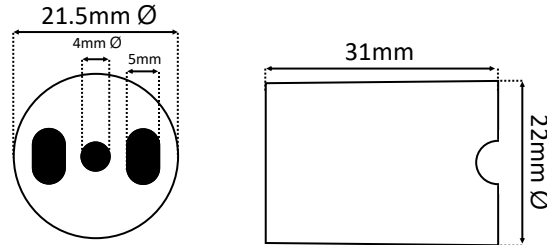
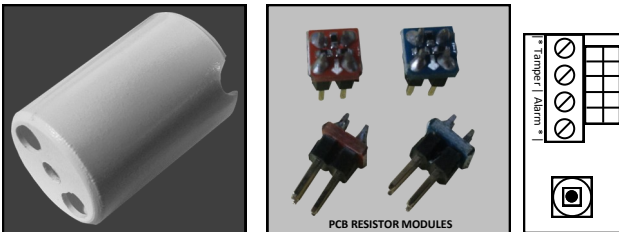
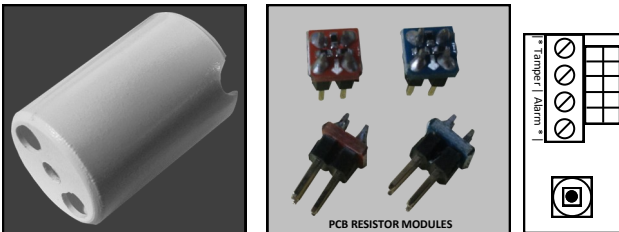
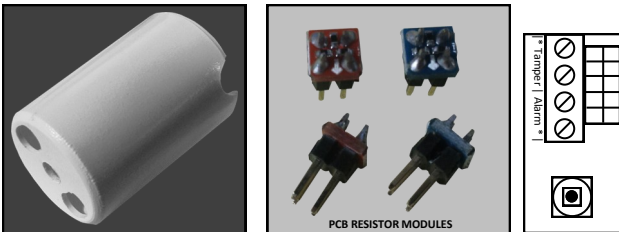


FRONT/ BACK	CONTACT		MAGNET		DESCRIPTION Grade 3, Class II 4 terminal flush contact +resistors. Rectangular plate. Single reed, normally closed. <i>(complete circuit when magnet present).</i>
					
SIDE / END					VARIANTS XA41MULTIB—4T flush contact, rect. plate, brown +resistors.
					
PHOTO					ACTIVATION Reed switch, ~14mm operating gap. Selectable resistor modules: EOL: 1k, 2k2, 4k1, 4k7, 5k6, 10k. ALM: 1k, 2k2, 4k1, 4k7, 5k6, 6k8, 10k. Microswitch tamper. Magnetic tamper reed switch.
					
COVER / PCB					WIRING As marked on PCB. Use * terminals for supervised loop.
					
					MATERIALS Plastic casing. Ferrite/Alnico V magnet. Rhodium reed.
					TEMPERATURE RANGE -40 to +50 degrees Celsius.
					ELECTRICALLY RATED AS FOLLOWS 500mA Max DC. 500mA Max AC. 1 – 100v DC. 125v AC Max.
 KNIGHT FIRE & SECURITY					All dimensions in mm Do not scale
Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH Tel: +44 (0) 2920 488 129 Fax: +44(0) 2920 489 132					
Drawing #: XA41MULTI Drawn: Gareth Carpenter Date: 01/09/2017 Revision: 1					© Knight Fire & Security Products Ltd All cases of infringement will be pursued.