

TURBO ACUSENSE DVR

Key Feature

- Deep learning-based motion detection 2.0 for all analog channels
- Deep learning-based perimeter protection
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTVI/AHD/CVI/CVBS/IP video inputs
- Audio via coaxial cable
- Up to 16-ch IP camera inputs (up to 8 MP)
- Up to 10 TB capacity per HDD
- Provide power supply to PoC cameras over coaxial cable



Compression and Recording

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP resolution

Storage and Playback

- 2 SATA interfaces
- Smart search for efficient playback

Smart Function

- Deep learning-based motion detection, and perimeter protection (line crossing and intrusion detection)
- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras

Network & Ethernet Access

- Compatible with major Wi-Fi dongle products in the market
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Output bandwidth limit configurable

Specification

Model	
Motion Detection 2.0¹	
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported;
Perimeter Protection¹	
Human/Vehicle Analysis	Up to 4-ch
Recording	
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding resolution	Main stream: 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)
	Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N)
Video bitrate	32 Kbps to 10 Mbps
Dual stream	Support
Stream type	Video, Video & Audio
Audio compression	G.711u
Audio bitrate	64 Kbps
Video and Audio	
IP video input²	4-ch (up to 12-ch)
	Enhanced IP mode on: 8-ch (up to 16-ch), each up to 4 Mbps
	Up to 8 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras
Analog video input	8-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
PoC camera input	Support Hikvision PoC camera *: PoC access capability see Appendix.
HDTVI input	8 MP@15 fps, 8 MP@12.5 fps, 3K@20 fps, 5 MP@20 fps, 5 MP@12 fps, 4 MP@30 fps, 4 MP@25 fps, 3 MP@18 fps, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50 fps, 720p@30 fps, 720p@25 fps
AHD input	5 MP@20 fps, 4 MP@25 fps, 4 MP@30 fps, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps
HDCVI input	4 MP@25 fps, 4 MP@30 fps, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps
CVBS input	PAL/NTSC
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
HDMI output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz

Video output mode	HDMI/VGA simultaneous output
Audio input³	4-ch, RCA (2.0 Vp-p, 1 K Ω)
	8-ch via coaxial cable
Audio output	1-ch, RCA (Linear, 1 K Ω)
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 K Ω) (using the audio input)
Synchronous playback	8-ch
Network	
Total bandwidth	128 Mbps
Remote connections	64
Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Network interface	1, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface
Wi-Fi	Connectable to Wi-Fi network by Wi-Fi dongle through USB interface
Auxiliary interface	
SATA	2 SATA interfaces
Capacity	Up to 10 TB capacity for each disk
Serial interface	RS-485 (half-duplex)
USB interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
Alarm in/out³	8/4
General	
Power supply	48 VDC, 2.5 A
Consumption	≤ 15 W (without HDD)
Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Working humidity	10% to 90%
Dimension (W × D × H)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
Weight	≤ 3.4 kg (without HDD, 7.5 lb.)


Note:

1: Motion detection 2.0 and perimeter protection cannot be enabled at the same time. Enable one function will make the other one unavailable.

2: Enhanced IP mode might be conflicted with smart events (motion detection 2.0 and perimeter protection) or other functions, please refer to the user manual for details.

3: The number of audio inputs and alarm in/out can be optional. The tag on the package will describe audio input and alarm in/out parameters. For example, "4A+8/4ALM" means your device has 4 audio inputs, 8 alarm inputs and 4 alarm outputs. If your device only has 1 audio input, the tag may not describe it.

Physical Interface

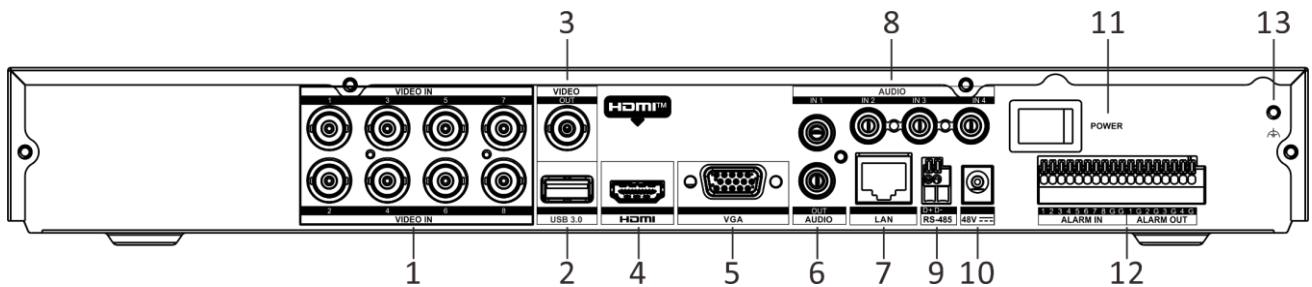

No.	Description	No.	Description
1	Video and Coaxial Audio In	8	AUDIO IN, RCA connector
2	USB interface	9	RS-485 serial interface
3	VIDEO OUT	10	48 VDC power input
4	HDMI interface	11	Power switch
5	VGA interface	12	ALARM IN/OUT
6	AUDIO OUT, RCA connector	13	GND
7	LAN network interface		

Appendix

AT/AF Mode

With reference to PoE standards, Hikvision has introduced AT and AF mode for PoC to distinguish the power level of PoC cameras. The maximum operating power of AT and AF are 12 W and 6 W respectively. These two modes are not related to IEEE 802.3 IP standard.

PoC Access Capability

PoC Device	Allowed AT/AF Camera Access
4-ch PoC device	4 AT cameras
8-ch PoC device	8 AT cameras
16-ch PoC device	8 AT cameras + 8 AF cameras Or up to 12 AT cameras

16-ch PoC device is connected to 8 AT cameras through 8 random channels rather than fixed ones. The access scenarios of a 16-ch PoC device are listed in the table below:

AT camera access	12	11	10	9	8	N (0 to 7)
AF camera access	0	2	4	6	8	16-N