



INSTALLATION & MAINTENANCE MANUAL

Curved Edge Range - Grid

GENERAL INSTRUCTIONS


These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of Curved Edge Grid products

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- Do not overload this accessory or subject it to conditions outside its rating
- This product is for indoor use only

INSTALLATION

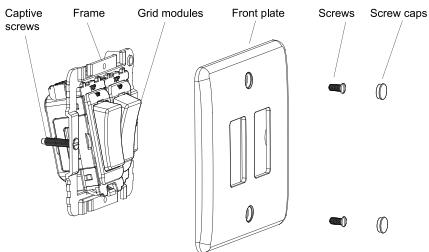

L – LIVE – Brown

N – NEUTRAL – Blue



– EARTH – Green / yellow

*** Note – if your installation uses a four lug metal mounting box, remove the top and bottom lugs or bend fully back**

Note - The Knightsbridge Curved Grid range is not compatible with the Knightsbridge Screwless, Flat Plate and Decorative Grid ranges.

- Always ensure the wall surface is flat and smooth

- Connect the earth conductor to the grid frame and mount to the backbox using the screws provided. The position of the frame in relation to the wall can be adjusted by the two captive fixing screws. For installations with more than one grid frame, it is important that all the grid frames are effectively connected to earth via their own respective earth terminals. Use green/yellow sleeving on earth conductors that are not insulated
- Pull cabling through the frame and strip insulation accordingly. Proceed to terminate cables into each module
- Check all electrical connections are secure with all exposed copper within the terminal and no loose strands of cable
- Locate the groove in the higher edge of the module and clip into the aperture at the base of the module as per the above image
- Adjust the position of the frame in relation to the wall. Attach the front plate using the fixing screws provided and push in screw caps covers
- Switch on and check for correct operation

GENERAL

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product and invalidate the warranty

WARRANTY

This product has a warranty of 15 years* from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring regulations (BS7671), improper use or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.*3 years on dimmers and electronic components