



INSTALLATION & MAINTENANCE MANUAL

SURF236HF / SURF258HF
SURF270HF

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

SURF236HF / SURF258HF / SURF270HF


SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is for indoor use only
- This product is Class I and must be earthed
- This product is IP20 rated

INSTALLATION

- Provide power to the required point of installation
- Using the plastic glove provided carefully remove the louvre by pressing in the retaining clips
- Mark the location of the fixing holes and drill the holes ensuring not to infringe with any gas / water pipes or electrical cables
- Feed the mains cable through the cable entry point on the luminaire
- Secure the luminaire to the surface
- Connect to the mains supply ensuring the correct polarity is observed: L - Live (brown), E - Earth (green/yellow), N - Neutral (blue) (see Fig. 1)

Fig . 1

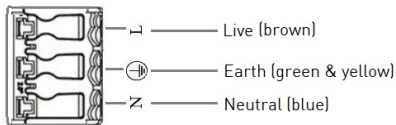

- Insert 2 x suitable T8 fluorescent lamps
- Connect the earth flylead to the louvre and click the louvre into place
- Switch on and check for correct operation


WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

The louvre is easily marked by handling, the protective glove provided should be used.

GENERAL

This product contains a control gear which can be replaced by a professional.



Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

INTERNATIONAL
CONTACT DETAILS



230V
50Hz

IP20



ML
ACCESSORIES LTD



**UK
CA** **CE**



52

ML Accessories Limited LU5 4LT
www.mlaccessories.co.uk