

XPERT 8

Intelligent Mounting Base



Product overview	
Product	Mounting Base
Part No.	SA5000-200
	SA5000-204

Product information

All detectors in the Soteria®, Discovery® and XP95® range fit into the XPERT 8 Intelligent Mounting Base. The base has a wide interior diameter for ease of access to cables and terminals. The 'E-Z Fit' feature allows you to fit the base screws, place the XPERT 8 Intelligent Mounting Base over the screws, slide it into place and tighten the screws. The detector requires a clockwise rotation into the base for fitting. Additionally the detector can be locked into the base for increased security, by a grubscREW using a 1.5mm hexagonal driver. The XPERT 8 card, Part Number 38532-064, supplied with the base, has pre-punched pips to remove to set the address. Refer to the XPERT 8 Intelligent Mounting Base Installation Guide 39215-005 for details on how to set the address.

- Compatible with Soteria, Discovery and XP95 detectors
- Isolated and Non-isolated devices supported
- Isolated wiper - maintains loop connectivity during temporary removal of devices
- Supplied with XPERT 8 Card for CoreProtocol® *
- 'E-Z Fit' allows for simple mounting of the detector base after wiring
- Base mark allows for LED detector alignment

* Note: XPERT 8 card increases the address capacity to 254 when using Soteria detectors and CoreProtocol enabled fire control panels.


Manufacturer's Specification

All data is supplied subject to change without notice. Specifications are typical at 24 V, 25°C and 50% RH unless otherwise stated.

Terminal functions	+L2	Loop in & out positive
(Note: With reference to Figures 1, 2 & 3, L1 & L2 are polarity sensitive when used with a Soteria detector)	-L1 in	Loop (isolated) negative
	-L1 out	Loop (isolated) negative
		Functional earth
	+R	Remote indicator positive connection
	-R	Remote indicator negative connection

Standards and approvals	LPCB, BOSEC, VNIIP0
Dimensions	100mm dia. x 20mm height
Weight	63g
Materials	Base: White flame-retardant polycarbonate Terminals: Nickel plated stainless steel

Figure 1: Wiring diagram for detectors with isolator*

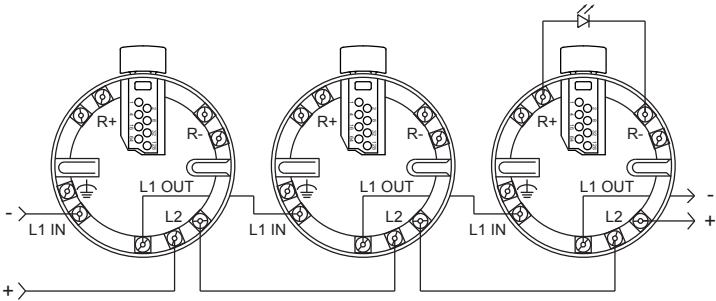

Note: Detectors without isolators will work with the above connections, however, if there are no isolators in the system, or it is a retrofit application, the arrangement below is recommended.

Figure 2: Wiring diagram for detectors without isolator

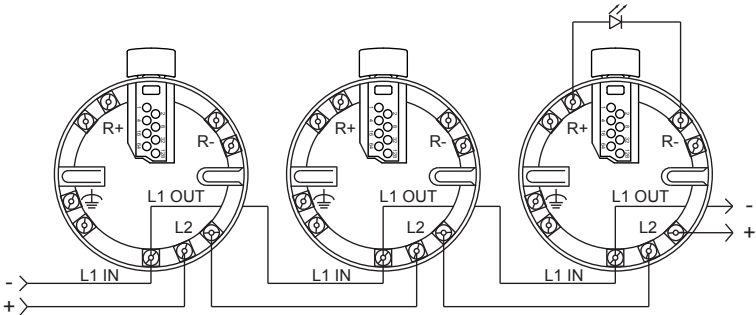


Figure 3: Wiring diagram for detectors without isolator with common remote LED

