
Ínteligent

The trusted independent experts for hand dryers and washrooms since 2012.



LOKI dispenser 4040/4042/4044/4046, 4050/4052/4054/4056, 4060/4062/4064/4066

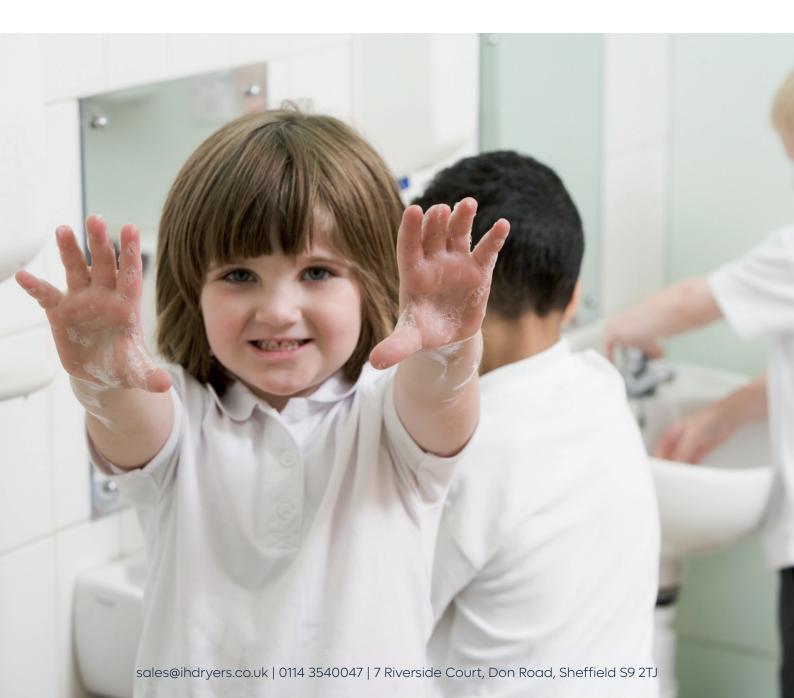

reddot winner 2021

Manual operation
For soap/disinfectant
2-year warranty



LOKI manual dispensers are part of DAN DRYER's award-winning line of sanitary equipment. The product line is characterised by elegant lines and the "I" on the front, which ties together the line and creates harmony when multiple LOKI products are displayed side by side.

Application

The LOKI line has been created to complement surrounding interior architecture such as window, doors, and wall surfaces. The elegant design and the floating look make the products easily integratable in most commercial and public washrooms.

Technical data

Prod. No:	For liquid soap and gel
4040/4042/4044/4046	disinfectant.
4040/4042/4044/4040	Viscosity 1-3000 cP
Prod. No.:	For disinfectant spray.
4050/4052/4054/4056	Viscosity 1 cP
Prod. No.:	For foam soap and foam
4060/4062/4064/4066	disinfectant.
	Viscosity 1 cP
Dimensions	H 328 x B 131 x D 115 mm
	Brushed/powder coated stainless
Material	steel
Capacity	0.61
Net weight	2.7 kg

Tender text

Manually operated dispensers for liquid, gel and foaming soap/disinfectant. Brushed/powder coated stainless steel housing. Capacity: 0.6 l. Net weight: 2.7 kg. H: 328 mm, W: 131 mm, D: 115 mm.

References

Offices and administration, shopping malls, restaurants, hotels, airports, sports facilities and public swimming pools, schools, public institutions and cultural centres.

Standard colours

Prod. No. 4040/4050/4060: Brushed stainless steel

Prod. No. 4042/4052/4062: RAL 9003, white, gloss 60.

Prod. No. 4044/4054/4064: RAL 9005, matt black. gloss 10

black, gloss Tu

Prod. No. 4046/4056/4066: RAL Classic colours

Activation

Manual operation. Press the dosage lever slightly backwards for dosage. Dosage stops as soon as pressure is released. Access to the internals of the dispenser is only possible with a special key fitting all LOKI products.

Installation

Wall mounting.