

A1824




Gate leaves of up to 1.8 m



Ideal solution for residential settings

- Bespoke and exclusive design.
- Trilobe key release system.
- Adjustable mechanical stops for memorizing gate travel.
- Simplified connections and one, three-conductor cable.
- Die-cast aluminum supporting half-shells
- Fully covered and protected endless screw.
- Can operate in emergency mode during power outages.
- Self-diagnosing safety devices.
- Compliance tested to meet UK standards.

Dimensions (mm)

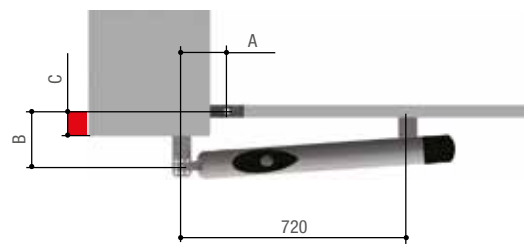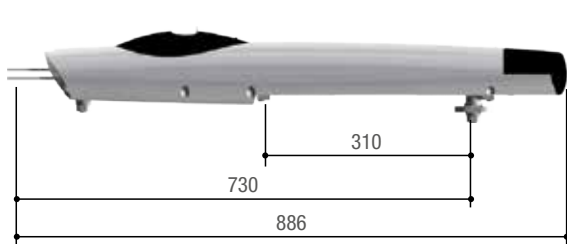

Application dimensions (mm)

MODELS	A1824		
LEAF OPENING (°)	A	B	C Max.
90	130	130	60
120	130	110	50

Operational limits

MODEL	A1824		
Max. width of leaf (m)	1,8	1,5	1
Max. weight of leaf (kg)	200	215	250

Technical characteristics

MODELS	A1824		
Protection rating (IP)	44		
Power supply (V - 50/60 Hz)	-		
Power supply to motor (V)	24 DC		
Absorption (A)	4 Max.		
Power (W)	100		
Maneuvering time at 90° (s)	ADJUSTABLE		
Duty/cycle (%)	HEAVY-DUTY SERVICE		
Torque (Nm)	400 ÷ 2000		
Operating temperature (°C)	-20 ÷ +55		
Motor's heat protection (°C)	-		