
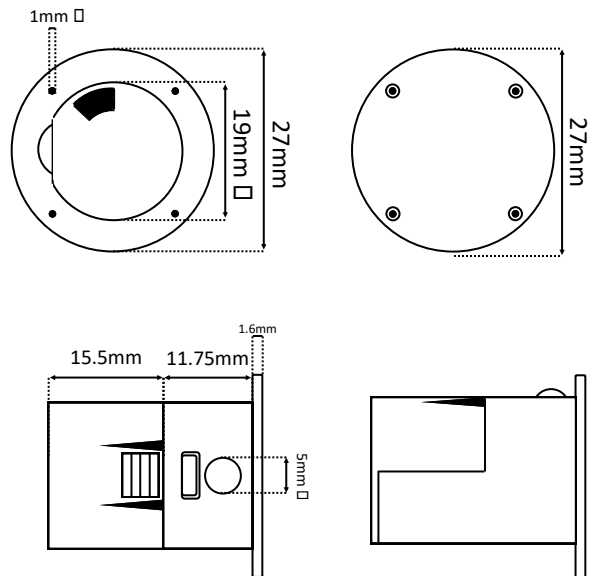
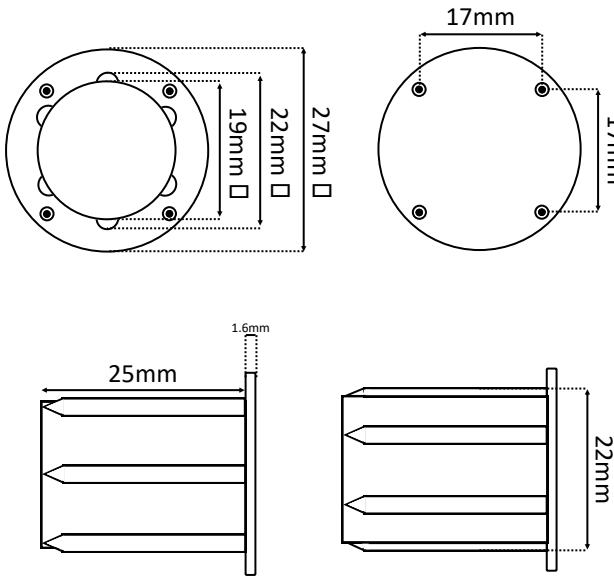
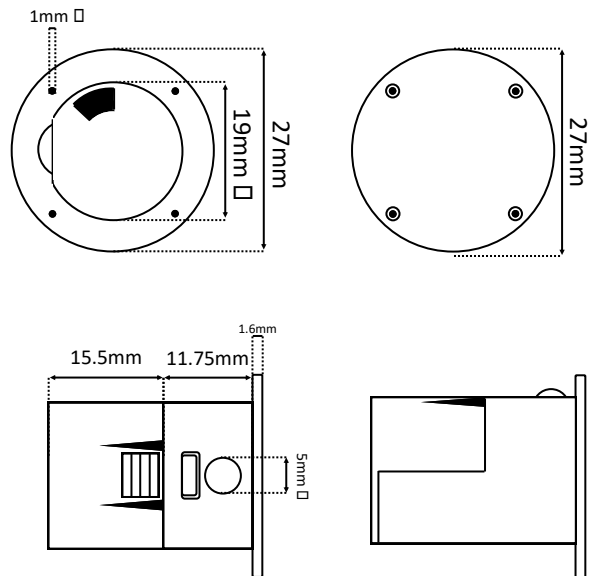
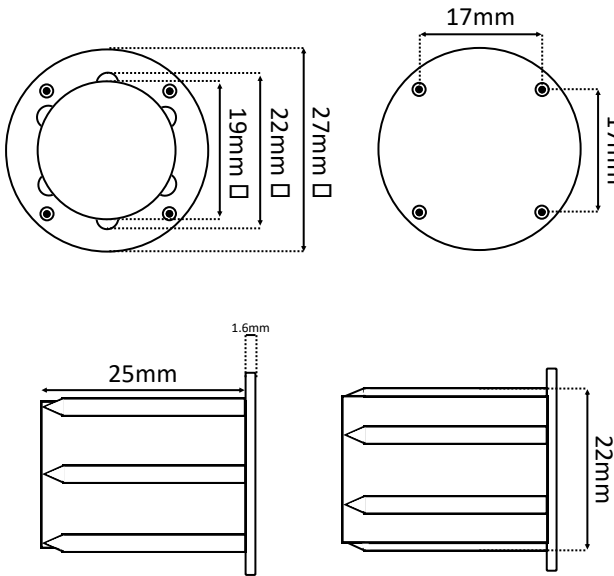
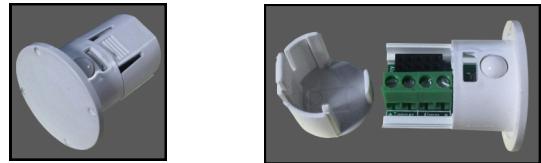

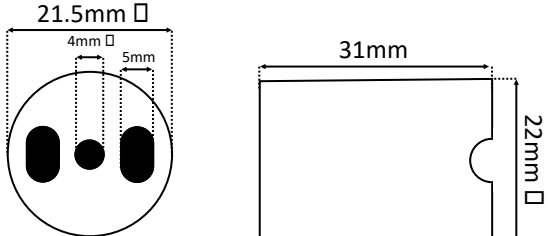




FRONT/ BACK	CONTACT		MAGNET		DESCRIPTION Grade 2, Class II 4 terminal flush contact +resistors. Round plate. Single reed, normally closed. <i>(complete circuit when magnet present).</i> VARIANTS A51MULTIB—4T flush contact, rect. plate, brown +resistors. ACTIVATION Reed switch, ~14mm operating gap. Selectable resistor modules: EOL: 1k, 2k2, 4k1, 4k7, 5k6, 10k. ALM: 1k, 2k2, 4k1, 4k7, 5k6, 6k8, 10k. Microswitch tamper. WIRING As marked on PCB. Use * terminals for supervised loop. MATERIALS Plastic casing. Ferrite/Alnico V magnet. Rhodium reed. TEMPERATURE RANGE -40 to +50 degrees Celsius.
					
SIDE / END					ELECTRICALLY RATED AS FOLLOWS 500mA Max DC. 500mA Max AC. 1 – 100v DC. 125v AC Max.
PHOTO					
COVER / PCB			  		
	  		  		



KNIGHT

FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate

Cardiff UK CF24 5TH

Tel: +44 (0) 2920 488 129

Fax: +44(0) 2920 489 132

Drawing #: A51MULTI

Drawn: Gareth Carpenter

Date: 01/06/2017

Revision: 1

All dimensions in mm

Do not scale

© Knight Fire & Security Products Ltd

All cases of infringement will be pursued.

CE