


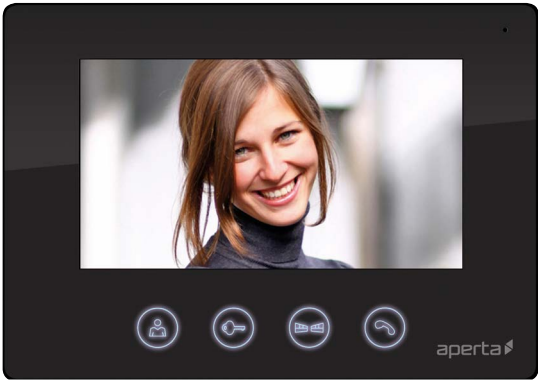

General Information

Dimensions (mm)	152 x 215 x 18
Colour	Black
Materials	ABS
Mounting	Surface
Weight (Kg)	.45
Warranty (Years)	2

Media Information

Screen Size (Inches)	7
Illumination	Backlight Screen and Buttons
Resolution	800(H) x 3RGB x 480(V)
Audio	Full Duplex
Adjustments	Volume, Brightness, and Contrast Dials

Programming

User Interaction	4 buttons
Programming Type	7 x DIP switches
Maximum Settable Address	32 (set by first 5 DIP Switches)

Environment

Ingress Protection	IP20
Operating Temperature (°C)	0 to +40

Supply & Power

Operating Voltage (V DC)	24 (BUS)
Effective Distance to PowerSupply (M)	100
Master/Slave	Yes (set by 6th DIP Switch)

Network

Recommended BUS Cable	Cat5e or higher
Communication Protocol	BUS

Supplied Fixing Screws, and Wall Plugs, Surface Mount Bracket, User Manual

Features

Internal Call Facility

Accessories

APPOWSWDR: Aperta Singleway BUS power supply
APDSSW: Aperta BUS Single Way Door Station
APDSSWKP: Aperta BUS Single Way Door Station With Keypad

Additional Information Simple 2-core Installation
For use with both Single way & Multiway Applications

