

# AX302304




Gate leaves of up to 3 m



## Ideal solution for applying to gates in single homes or apartment blocks

- Compliance tested to meet UK standards.
- Available in reversible and irreversible mode.
- Fully covered and protected endless screw.
- Encoder technology for controlling slow-downs.
- Adjustable mechanical stops for memorizing gate travel.
- Die-cast aluminum supporting half-shells

### Dimensions (mm)

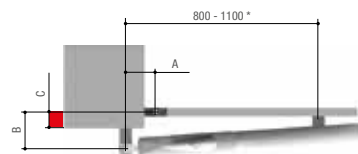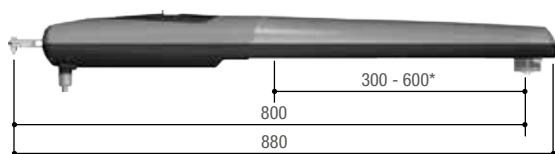

### Operational limits

| MODEL                    | AX302304 |     |     |
|--------------------------|----------|-----|-----|
| Max. width of leaf (m)   | 3        | 2,5 | 2   |
| Max. weight of leaf (kg) | 500      | 600 | 800 |

### Application dimensions (mm)

| MODELS           | AX302304 |     |        |
|------------------|----------|-----|--------|
| LEAF OPENING (°) | A        | B   | C Max. |
| 90               | 130      | 130 | 70     |
| 120              | 140      | 100 | 50     |

#### NOTES:

\* It is obligatory to fit an electric lock on the gate leaf.

\*\* Do not fit panels on gate leaves longer than 5 m. With reversible versions, when the gate is open, the gate leaf could close back up if there is a strong wind.

### Technical characteristics

| MODELS                       | AX302304        |
|------------------------------|-----------------|
| Protection rating (IP)       | 44              |
| Power supply (V - 50/60 Hz)  | 230 AC          |
| Power supply to motor (V)    | 230 AC 50/60 Hz |
| Absorption (A)               | 1,5             |
| Power (W)                    | 175             |
| Maneuvering time at 90° (s)  | 20              |
| Duty/cycle (%)               | 50              |
| Torque (Nm)                  | 500 ÷ 4500      |
| Operating temperature (°C)   | -20 ÷ +55       |
| Motor's heat protection (°C) | 150             |