


Barrier Interface Unit (for use with intrinsically safe detectors)

Part No. **BF362**

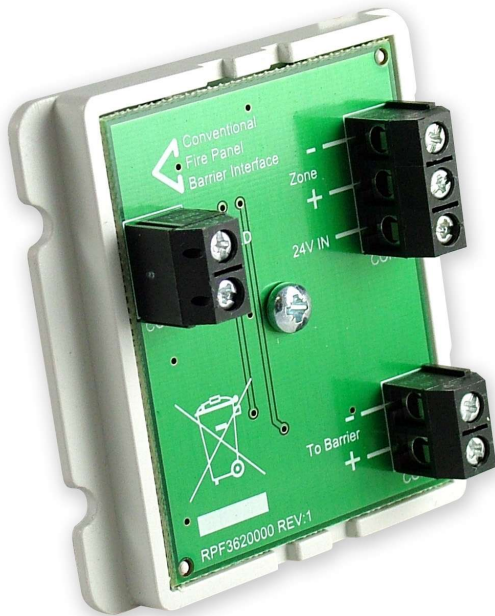

Overview

- Compatible with all C-TEC manufactured conventional fire alarm panels.
- Allows a zone of up to 10 intrinsically safe detectors and any number of manual call points to be used in hazardous environments such as gas plants.
- Open and short circuit wiring faults on the hazardous side of the barrier shown as open circuit faults at the fire panel.



Technical Specifications

Compatibility	Can be connected to any detector Zone circuit on a C-TEC manufactured conventional fire alarm panel.
Power requirements	Aux. 24V operating voltage required from fire panel.
Quiescent current	2.8mA @ 30V.
Product dimensions (mm)	55 W x 55 H x D 18mm.
Weight	TBC.