




CDVI

Security to Access



DIGIWAY


DOOR AUTOMATION

www.cdvi.co.uk

DIGIWAY provides a universal door automation solution for swing doors. Whether doors are single or double, internal or external, DIGIWAY is reliable, discreet, and safe. With a built-in radio frequency receiver and clear LCD screen, all parameters can be quickly and easily programmed. DIGIWAY is designed to make installation simple for a variety of automation projects.

Door automation solutions

- FREE in-depth installer training with CDVI Academy
- Up to 225,000 opens a year for moderate to intensive use
- Motor-driven or spring return door operators
- Optional Bluetooth module for pairing free programming app

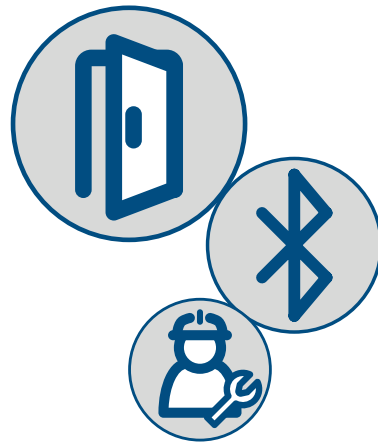

DIGIWAY Spring Return

Fire tested under EN1634-1 (60 mins)

The DIGIWAY SR door operator is certified to withstand fire for up to 60 minutes under the EN1634-1 standard. The operator can also be easily connected to fire signals to automatically respond in an emergency. The door can be set to lock, unlock, close, or swing freely in the event of a fire.

For end users, DIGIWAY is a reliable, durable, aesthetic solution. Along with improving mobility and accessibility, door automation enhances security and promotes better hygiene. Your project might be a residential care home needing better wheelchair access, or a busy school managing regular surges of traffic. DIGIWAY is an effective solution for a huge range of swing doors.



Better buildings for all

- No cables on either side for a sleek aesthetic solution
- Compact electric motor for quiet, discreet operation
- Improved security with access control integration
- Better accessibility for people with reduced mobility
- Built-in radio receiver for seamless & wireless activation



Which DIGIWAY is right for your project?

There are two models of the DIGIWAY door operator: the Plus and the SR. The Plus is electro-mechanically driven and designed for improving accessibility in areas with generally lower levels of traffic. It's ideal for private residences or care homes. Meanwhile, the SR is assisted by a chain-driven spring return mechanism. This makes it suited for sites with higher traffic and larger, heavier doors.

	DIGIWAY PLUS	DIGIWAY SR
Max Door Weight*	120kg	200kg
Max Door Width*	1.2m	1.5m
Power	50 W	100 W
Dimensions	511 x 90 x 110	685 x 90 x 110
Lock Power Input	12Vdc-1A	12Vdc-1A / 24Vdc-0.5A
Fire Input	Power 24-48 Vdc	NC Contact
Semi-Automatic Mode	-	Yes
Battery Failover	Yes	-
Spring Return	-	Yes
Software-Assisted Setup	-	Yes
Fire-Tested	-	Yes
Recommended Usage	Private use, fully automated	Public use, main doors, automated and manual



Easy Bluetooth programming

Both DIGIWAY door operators can be ordered with an optional built-in Bluetooth module.

The free DIGIWAY BLE smartphone app mirrors the readout of the LCD screen on the operator. All settings and parameters can be configured from your phone. No need to remove the operator cover!

Automated doors are a type of machine. All machines must comply with the European Machinery Directive, which is intended to keep users safe. EN16005 is a harmonised standard under the Machinery Directive. We advise that all DIGIWAY installations must comply with EN16005. These regulations cover a range of different factors to be considered when evaluating a site for installation suitability. For full training on EN16005 regulations, installers should contact the ADIA or ADSA.



What EN16005 covers

The factors covered by the EN16005 regulations include (but are not limited to): safety signage, emergency provisions, safety barriers, and sensors. All these measures are designed to reduce the risk of injury for those using the automatic door. All users must be considered, including able-bodied adults, wheelchair users, less mobile people, and children.

Safety sensors

Safety sensors are a key part of meeting EN16005 regulations. As well as allowing users to trigger the door to open upon approaching it, they also protect users from harm. If a person or part of a person enters a zone where they could be injured by the motion of the door, sensors detect this and immediately stop the door. Sensors might use microwave, infrared, or laser technology to scan the areas of potential danger. Finger-guards should also be used along the hinge line.



DIGIWAY kits are designed to make it easy to comply with EN16005 regulations. The kits include the DIGIWAY door operator, safety sensors, finger-guards, and safety signage. Other components may be needed to comply with the regulations, depending on the site and requirements of the project.



-  DIGIWAY Plus or DIGIWAY SR door operator(s)
-  One or two door operators for single or double doors
-  Infrared safety sensors to detect approaching people
-  Black or white finger-guards to protect the door's hinge line
-  Safety signage to notify users of the automated door



Built-in receiver to create complete entry solutions

Backed by a robust 2-year warranty

Suitable for people with reduced mobility

Combine ease of use with reliable operation

Free CDVI Academy training



DWCP

- DIGIWAY external control panel
- Hard-wired directly to the door operator
- Convenient way to set door modes
- Easily switch between day and night mode
- Visual indication with LEDs

RTE-AIR & RTE-CIR

- Touchless activation trigger devices
- Adjustable infrared detection range
- Visual feedback with 2-colour LEDs
- Compact, surface mount design
- Robust IP ratings for indoor or outdoor installation



TX26-MC1 transmitter

- Universal 1-channel transmitter
- Ideal for making exit buttons and infrared devices wireless
- Turns standard contacts into radio frequency signals
- Up to 1000m range in open field
- Open connections (push-to-make)
- Perfect when cabling is difficult



Also available from CDVI:



**Intelligent
Biometric
Solutions**



**Powerful
Video
Entry**



**Innovative
Access
Control**



**Robust
Secure
Locking**

CDVI Ltd

Unit B1, Knaves Beech Business Centre
Davies Way
Loudwater, High Wycombe
HP10 9QR

+ [44] (0) 1628 531 300

sales@cdvi.co.uk

www.cdvi.co.uk

**Sign up to our
newsletter!**



Every effort is made to ensure all information in this document is correct at the time of publication, but it is offered without any guarantee and/or liability for completeness or correctness. Any information or images could be perceptibly different and we reserve the right to adjust, remove, or replace information or images without prior notice.

Date of Publication: 23 Dec 2022