


# CSB-E

## Conventional Sounder Base

### Features

- ▶ Robust design
- ▶ Low current consumption
- ▶ Easy to install
- ▶ Maximum 93 dB(A) @ 1 metre (Tone 1)
- ▶ 32 user-selectable tones and 3 user-selectable volumes
- ▶ Lockable cap available
- ▶ EN54 Part 3 approved.

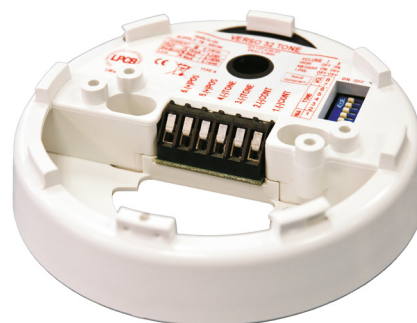

### Description

The CSB-E is platform type sounder, which will accept the CDX Range of detectors mounted with an appropriate base\*. The improved electronics result in a very low current consumption with a high sound output. A set of DIL switches are used to select the unit's tone and sound output (three settings, LOW, MEDIUM and HIGH).

| Specification                            |                                                                           |            |            |
|------------------------------------------|---------------------------------------------------------------------------|------------|------------|
| Ordering codes                           | CSB-E - Ivory / CSB-E(WHT) - White / CS-CAP - Lockable cap                |            |            |
| Sound level                              | LOW                                                                       | MEDIUM     | HIGH       |
| Sound output @ 1 metre: Tone 1           | 86.2 dB(A)                                                                | 87.7 dB(A) | 91.2 dB(A) |
| Current consumption @ 24 VDC             | 5.7 mA                                                                    | 7 mA       | 9.4 mA     |
| Operating Voltage                        | 18 – 30 VDC                                                               |            |            |
| Number of tones                          | 32                                                                        |            |            |
| Operating frequency                      | 440 - 2900 Hz                                                             |            |            |
| IP rating                                | IP21C                                                                     |            |            |
| Operating Temperature Range              | -20 °C to +70 °C                                                          |            |            |
| *Compatible CDX Bases                    | YBN-R/6, YBO-R/6PA, YBO-R/6R, YBO-R/6RN, YBO-R/6RS, YBN-R/6SK             |            |            |
| Compatible CDX Detectors                 | SLR-E3N, DCD-AE3, DCD-CE3, DFJ-AE3, DFJ-CE3                               |            |            |
| Colour / Case Material                   | Ivory or White / ABS                                                      |            |            |
| Weight (g) / Diameter (mm) / Height (mm) | 110 / 116 / 25                                                            |            |            |
| Base Fixing Centres (mm)                 | 48 ~ 74                                                                   |            |            |
| Approvals                                | Approved to EN54 Part 3 by the LPCB and VdS on tones 1, 3, 11, 25 and 27. |            |            |