	CONTACT	MAGNET
TOP	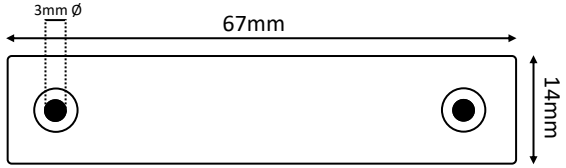	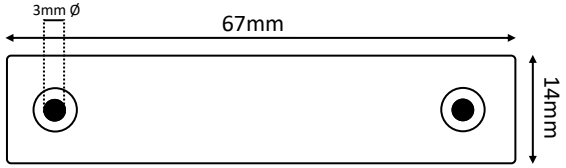
SIDES	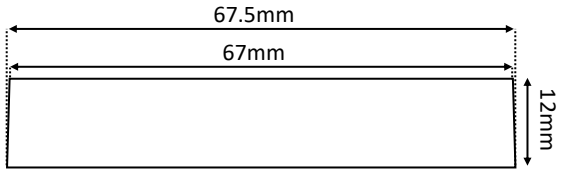	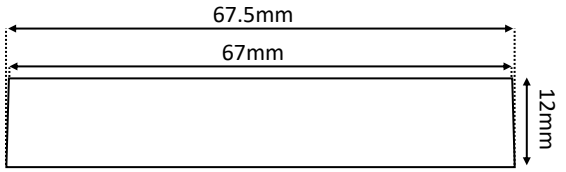
BOTTOM	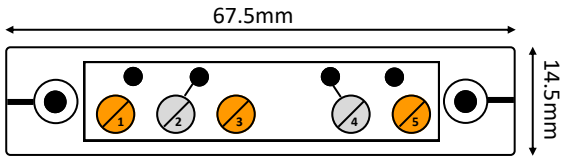	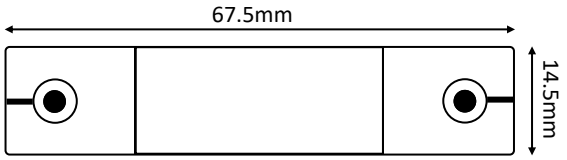
ENDS		
PHOTO	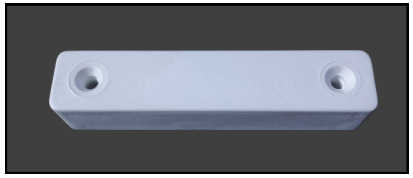	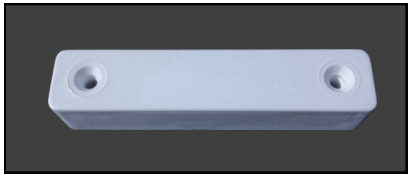

DESCRIPTION

Grade 1, Class II 5 terminal surface contact.
Normally closed.
(complete circuit when magnet present)

VARIANTS

D20B — 5 terminal surface contact brown.

ACTIVATION

Reed switch, ~20mm operating gap.

WIRING

Nickel	Reed switch
Brass	Spare

MATERIALS

White ABS plastic.
Ferrite magnet.
Rhodium reed.

TEMPERATURE RANGE

-40 to +50 degrees Celsius.

ELECTRICALLY RATED AS FOLLOWS

500mA Max DC.
500mA Max AC.

1 – 100v DC.
125v AC Max.

KNIGHT FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: +44 (0) 2920 488 129
Fax: +44(0) 2920 489 132

Drawing #:	D20
Drawn:	Gareth Carpenter
Date:	01/06/2017
Revision:	1

All dimensions in mm
Do not scale

UK CA CE

© Knight Fire & Security Products Ltd
All cases of infringement will be pursued.