


The D60 is a single reed surface contact in normally open (N/O) configuration. Circuit opens in presence of a magnet, closing as it moves away. The operating gap is approx. 20mm – but this may be affected if mounted near ferrous materials.

INSTALLATION

Connect the reed/alarm wires to the nickel terminals (T2 & T4). Use the spare unconnected brass terminals (T1, T3 & T5) for any additional wiring required.

Fix the magnet to the door and the contact to the frame using the fixings provided. Ensure both halves align correctly for best operation.

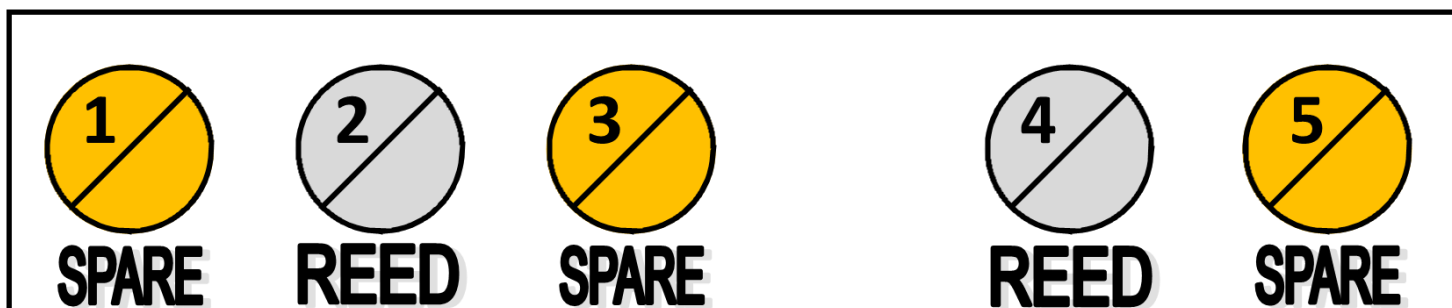

NOTES

The reed is rated 500mA max AC, 500mA max DC