
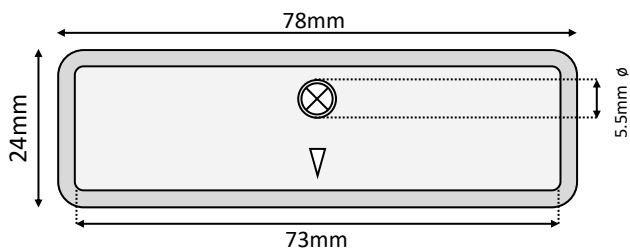
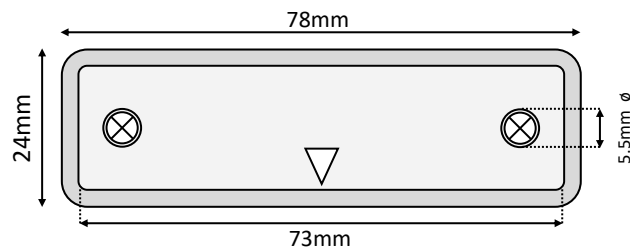
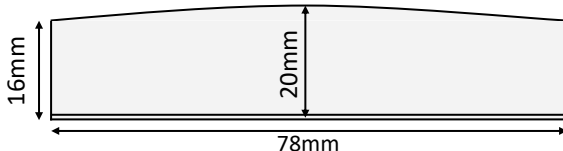
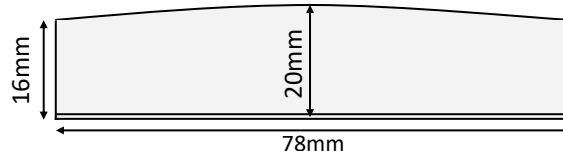
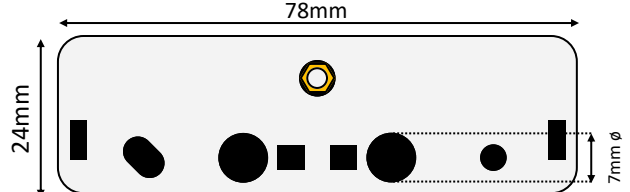


TOP	CONTACT 		MAGNET 		DESCRIPTION Grade 2, Class II 6 terminal surface contact. Normally open. <i>(Open circuit when magnet present).</i> VARIANTS D75 N/C variant ACTIVATION Reed switch, 35mm operating gap. Microswitch tamper. WIRING 2x reed terminals. 2x tamper terminals. 2x spare terminals. MATERIALS White ABS plastic. Ferrite magnet. Rhodium reed. TEMPERATURE RANGE -40 to +50 degrees Celsius. ELECTRICALLY RATED AS FOLLOWS 500mA Max DC. 500mA Max AC. 1-100V DC Max. 1-125v AC Max.	
	SIDES					
		BOTTOM				
ENDS & PHOTO (BOTH)						

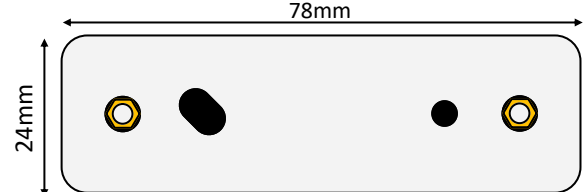

KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: +44 (0) 2920 488 129
Fax: +44(0) 2920 489 132

Drawing #: D75NO
Drawn: Gareth Carpenter
Date: 01/10/2025
Revision: 1

All dimensions in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of infringement will be pursued.