

DHI-RB100/LS

Server Cabinet Rail Bracket



Series Overview

The server cabinet rail bracket is compatible with 3U or higher EVS and IVSS with 16, 24, 36 or 48 bays. It can be installed in cabinets that are 19" wide.

- 1. Compatible with 3U or higher EVS and IVSS with 16 to 48 bays, and can be installed in cabinets that are 800 to 1,200 mm deep and 19" wide.
- 2. Suitable for chassis where disks can be inserted from the front or back, and that are 436 to 446 mm wide, with a depth that is less than 720 mm.
- 3. Capable of bearing up to 100 kg.


Scene

1. Compatible with 3U or higher EVS and IVSS with 16 to 48 bays, and can be installed in cabinets that are 800 to 1,200 mm deep and 19" wide. 2. Suitable for chassis where disks can be inserted from the front or back, and that are 436 to 446 mm wide, with a depth that is less than 720 mm. 3. Capable of bearing up to 100 kg.

Technical Specification

Installation	
Installation	Secure the chassis to the cabinet using the square hole mounting rail.
Product Material	
Product Material	Eco-friendly strong galvanized steel sheet.
Product Dimensions	
Product Dimensions	52.5 mm × 110.4 mm × 600 mm (2.67" × 4.35" × 23.62") (W × H × D)Depth: 600 mm–900 mm (23.62"–35.53") adjustable
Applicable Cabinet	
Applicable Cabinet	Width: 482.6 mm (19.00")Depth: 800 mm–1200 mm (31.50"–47.24")
Applicable Chassis	
Applicable Chassis	Width: 436 mm–446 mm (17.17"–17.56") Depth: ≤720 mm (28.35") Height: 3U or higher Bays: 16-48
Load Bearing Capacity	
Load Bearing Capacity	≤100 kg (220.5 lb)
Net Weight	
Net Weight	5 kg (11.02 lb)
Gross Weight	
Gross Weight	5.4 kg (11.90 lb)

Dimensions (mm[inch])

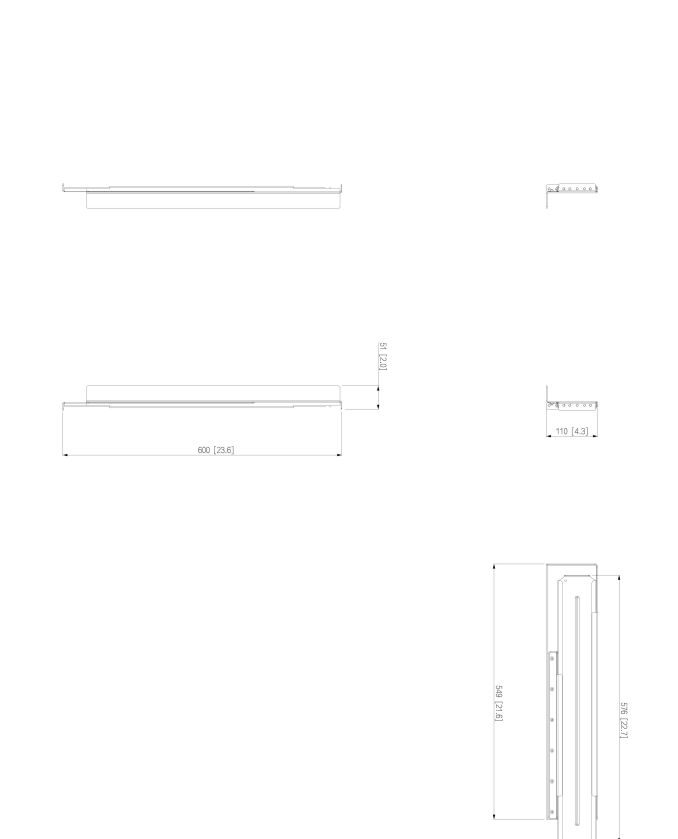

Ordering Information

Type	Model	Description
Server Cabinet Rail Bracket	DHI-RB100/LS	Server Cabinet Rail Bracket