

# DHI-TPC-SD5641-AC-V1

## Thermal Network Anti-corrosion Hybrid Speed Dome Camera



- Vanadium oxide uncooled focal plane detector.
- 4Megapixel progressive scan CMOS.
- AI functions: boat detection, heat detection, tripwire, intrusion, and human/vehicle classification.
- Maximum IR illumination distance is 100 m.
- Pan: 0° to 360°, tilt: -10° to +90°.
- 36 VDC  $\pm$  50%/Hi-PoE+ power supply.
- IP66 rated.
- Anti-corrosion

Featuring thermal and visible channels, Thermal Network Anti-corrosion Hybrid Speed Dome Camera offers various AI functions such as heat detection, smoke detection, tripwire, intrusion, and human/vehicle classification. The camera is applied in outdoor scenes of the medium-distance perimeter protection and heat detection. With the anti-corrosion coating, the camera can be used in scenes where anti-corrosion is required, such as coasts, ports, and coastal cities.

### Technical Specification

#### Thermal

|                                  |                                                                                                                                                          |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Detector Type                    | Vanadium oxide uncooled focal plane detector                                                                                                             |
| Effective Pixels                 | 640 (H) $\times$ 512 (V)                                                                                                                                 |
| Pixel Pitch                      | 12 $\mu$ m                                                                                                                                               |
| Spectral Range                   | 8 $\mu$ m–14 $\mu$ m                                                                                                                                     |
| Sensitivity (NETD)               | $\leq$ 35 mK (@f/1.0)                                                                                                                                    |
| Focal Length                     | 25 mm; 35 mm; 50 mm                                                                                                                                      |
| Field of View                    | 25 mm: H: 18.6°; V: 14.8°<br>35 mm: H: 12.6°; V: 10.1°<br>50 mm: H: 9.2°; V: 7.3°                                                                        |
| Thermal Focus Control            | Fixed-focal                                                                                                                                              |
| Close Focus Distance             | 25 mm: 15 m (49.21 ft)<br>35 mm: 28 m (91.86 ft)<br>50 mm: 55 m (180.45 ft)                                                                              |
| Digital Detail Enhancement (DDE) | Yes                                                                                                                                                      |
| Thermal Image Stabilization      | Electronic Image Stabilization (EIS)                                                                                                                     |
| Digital Zoom                     | 24 levels                                                                                                                                                |
| Thermal AGC                      | Auto/Manual                                                                                                                                              |
| Thermal Noise Reduction          | 2D NR/3D NR                                                                                                                                              |
| Image Flip                       | 180°                                                                                                                                                     |
| Color Palettes                   | 18 (white hot/black hot/fusion/rainbow/golden autumn/midday/iron red/amber/jade/sunset/icefire/painting/pomegranate/emerald/spring/summer/autumn/winter) |

#### Visible

|                          |                                                                            |
|--------------------------|----------------------------------------------------------------------------|
| Image Sensor             | 1/2.8" CMOS                                                                |
| Max. Resolution          | 2688 (H) $\times$ 1520 (V)                                                 |
| Pixel                    | 4 MP                                                                       |
| Horizontal Definition    | Center $\geq$ 1200 TVL<br>Edge $\geq$ 900 TVL                              |
| Min. Illumination        | Color: 0.01 lux<br>Black & white: 0.001 lux<br>0 lux (IR on)               |
| Visible AGC              | Auto/Manual                                                                |
| Visible Noise Reduction  | 2D NR/3D NR                                                                |
| S/N Ratio                | >55 dB                                                                     |
| White Balance            | Auto; manual; indoor; outdoor; tracking; sodium lamp; street lamp; natural |
| Defog                    | Electronic defog                                                           |
| Electronic Shutter Speed | 1 s–1/30,000 s (auto/manual)                                               |
| BLC                      | Yes                                                                        |
| WDR                      | Yes                                                                        |
| HLC                      | Yes                                                                        |
| Day/Night                | Auto (ICR); Color; B/W                                                     |
| Iris Control             | Auto                                                                       |
| Image Flip               | 180°                                                                       |
| Exposure Compensation    | Yes                                                                        |

|                            |                                |
|----------------------------|--------------------------------|
| Visible Focus Control      | Manual                         |
| Focal Length               | 3.95 mm–177.75 mm              |
| Field of View              | H: 67.5°–1.9°<br>V: 39.4°–1.1° |
| Close Focus Distance       | 1 m–10 m (3.28 ft–32.81 ft)    |
| Illuminator On/Off Control | Auto/Manual                    |
| Illumination Distance      | 100 m (328.08 ft)              |

Audio and Video

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression     | H.265; H.264M; H.264H; H.264B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Resolution            | Thermal:<br>Main stream: 1280 × 1024; 1280 × 720; 640 × 512; 1280 × 1024 (default)<br>Sub stream: 640 × 512; 320 × 256; 640 × 512 (default)<br>Visible:<br>Main stream: 2688 × 1520 (optional); 2560 × 1440; 1080p (1920 × 1080); 1280 × 720; 704 × 576; 2560 × 1440 (default)<br>Sub stream: 1920 × 1080; 1280 × 720; 704 × 576                                                                                                                                                                                                     |
| Video Frame Rate      | Thermal:<br>50 Hz: (main stream) 1 fps–25 fps adjustable, 25 fps by default; (sub stream) 1 fps–25 fps adjustable, 15 fps by default<br>60 Hz: (main stream) 1 fps–30 fps adjustable, 30 fps by default; (sub stream) 1 fps–30 fps adjustable, 15 fps by default<br>Visible:<br>50 Hz: (main stream) 1 fps–25 fps adjustable, 25 fps by default; (sub stream) 1 fps–25 fps adjustable, 15 fps by default<br>60 Hz: (main stream) 1 fps–30 fps adjustable, 30 fps by default; (sub stream) 1 fps–30 fps adjustable, 15 fps by default |
| Audio Compression     | G.711a; G.711mu                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Image Encoding Format | JPEG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

PTZ

|                      |                                                        |
|----------------------|--------------------------------------------------------|
| Pan/Tilt Range       | Pan: 0° to 360° endless<br>Tilt: –10° to +90°          |
| Manual Control Speed | Pan: 0.1°/s to 200°/s<br>Tilt: 0.1°/s to 120°/s        |
| Preset Speed         | Pan: 240°/s<br>Tilt: 200°/s                            |
| Preset               | 300                                                    |
| Tour                 | 8 (up to 32 presets per tour)                          |
| Pattern              | 5                                                      |
| Scan                 | 5                                                      |
| Power-off Memory     | Yes                                                    |
| Privacy Masking      | 4 areas in the same view                               |
| Idle Motion          | Preset; auto pattern; auto tour; pan; progressive scan |

Function

|                          |                                                                                                                                        |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Two-way Audio            | Yes                                                                                                                                    |
| Network Protocol         | HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; SNMP; QoS; UPnP; NTP; Multicast; SFTP; 802.1x |
| Region of Interest (RoI) | Yes                                                                                                                                    |

|                       |                                                                                                             |
|-----------------------|-------------------------------------------------------------------------------------------------------------|
| Storage               | Micro SD card                                                                                               |
| Micro SD Card (Max.)  | 512 GB                                                                                                      |
| Interoperability      | ONVIF; CGI; Dahua SDK                                                                                       |
| Browser               | IE: IE8 and later<br>Chrome: 42 and earlier<br>Firefox: 42 and earlier                                      |
| User/Host             | Up to 20 (total bandwidth: 64 MB)                                                                           |
| Security              | Authorized username and password; attached MAC address; HTTPS; IEEE 802.1x; controlled network access       |
| User Management       | Up to 20 users; supports multi-level user permissions (2 levels); management group and user group           |
| Malfunction Detection | Network disconnection detection; IP conflict detection; memory card state detection; memory space detection |
| PIP                   | Yes (Intelligence automatically turns off when PIP is on)                                                   |

Intelligence

|                            |                                        |
|----------------------------|----------------------------------------|
| Fire Detection             | Yes                                    |
| Cold/Hot Spot Trace        | Yes                                    |
| IVS (Perimeter Protection) | Yes. Supports tripwire and intrusion.  |
| Target Distinction         | Human/Vehicle Classification           |
| Target Tracking            | Manual tracking/Alarm linking tracking |
| Smoke Detection            | Yes                                    |
| Boat Detection             | Yes                                    |

Port

|               |                           |
|---------------|---------------------------|
| Analog Output | 1 × CVBS output; BNC port |
| Network Port  | 1 × RJ-45 (10/100 Base-T) |
| Alarm Input   | 7                         |
| Alarm Output  | 2                         |
| Audio Input   | 1                         |
| Audio Output  | 1                         |
| RS-485        | 1                         |

Power

|                   |                            |
|-------------------|----------------------------|
| Power Supply      | 36 VDC ± 50%, Hi-PoE       |
| Power Consumption | Basic: ≤21 W<br>Max: ≤40 W |

Environment

|                       |                                      |
|-----------------------|--------------------------------------|
| Operating Temperature | –30 °C to +60 °C (–22 °F to +140 °F) |
| Operating Humidity    | ≤95%                                 |
| Storage Temperature   | –30 °C to +70 °C (–22 °F to +158 °F) |

Physical Characteristics

|             |                                                                          |
|-------------|--------------------------------------------------------------------------|
| Protection  | IP66                                                                     |
| Reliability | Surge protection: 6 kV<br>Air discharge: 8 kV<br>Contact discharge: 6 kV |

|                      |                                                                                                                                                                                                                                                                                                                    |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Anti-corrosion Level | Moderate Protection<br>*The products feature high-grade anti-corrosion protection, making them well-suited for environments with standard corrosion resistance requirements. They perform reliably in areas from 2 km (1.24 mi) and above at coastal regions, as well as in locations prone to acid rain exposure. |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                      |                                                                 |
|----------------------|-----------------------------------------------------------------|
| Structure            |                                                                 |
| Product Dimensions   | Φ240 mm × 382 mm (Φ9.45" × 15.04")                              |
| Packaging Dimensions | 319 mm × 319 mm × 521 mm (12.56" × 12.56" × 20.51") (L × W × H) |
| Net Weight           | ≤8 kg (17.64 lb)                                                |
| Gross Weight         | ≤10 kg (22.05 lb)                                               |

|                |             |
|----------------|-------------|
| Certification  |             |
| Certifications | CE; NEMA 4X |

|                         |                       |
|-------------------------|-----------------------|
| Heat Detection Distance |                       |
| Focal Length            | Max. Distance         |
| 25 mm                   | 1,500 m (4,921.26 ft) |
| 35 mm                   | 2,100 m (6,889.76 ft) |
| 50 mm                   | 3,000 m (9,842.52 ft) |

Note:  
The table displays the measured distances obtained from using the target size 2 m × 2 m for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%.  
The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.

|                                              |                       |                     |
|----------------------------------------------|-----------------------|---------------------|
| Perimeter Protection Distance (IVS Distance) |                       |                     |
| Focal Length                                 | Distance (Vehicle)    | Distance (Human)    |
| 25 mm                                        | 525 m (1,722.44 ft)   | 175 m (574.15 ft)   |
| 35 mm                                        | 735 m (2,411.42 ft)   | 245 m (803.81 ft)   |
| 50 mm                                        | 1,050 m (3,444.88 ft) | 350 m (1,148.29 ft) |

Note:  
The table displays the measured distances obtained from using the target sizes 1.8 m × 0.5 m (human) and 1.4 m × 4 m (vehicle) for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%.  
The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.

|              |                                                                  |                                                               |                                                           |
|--------------|------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------|
| DRI Distance |                                                                  |                                                               |                                                           |
| Focal Length | Detection Distance <sup>①</sup>                                  | Recognition Distance <sup>②</sup>                             | Identification Distance <sup>③</sup>                      |
| 25 mm        | Vehicle: 3,194 m (10,479.00 ft);<br>Human: 1,042 m (3,418.64 ft) | Vehicle: 799 m (2,578.74 ft);<br>Human: 260 m (857.98 ft)     | Vehicle: 399 m (1,309.06 ft);<br>Human: 130 m (426.51 ft) |
| 35 mm        | Vehicle: 4,472 m (14,671.92 ft);<br>Human: 1,458 m (4,783.46 ft) | Vehicle: 1,118 m (3,667.98 ft);<br>Human: 365 m (1,197.51 ft) | Vehicle: 559 m (1,833.99 ft);<br>Human: 182 m (597.11 ft) |
| 50 mm        | Vehicle: 6,389 m (20,961.29 ft);<br>Human: 2,083 m (6,833.99 ft) | Vehicle: 1,597 m (5,239.50 ft);<br>Human: 521 m (1,709.32 ft) | Vehicle: 799 m (2,621.39 ft);<br>Human: 260 m (853.02 ft) |

① Detection Distance: Detects objects, but cannot recognize their characteristics (objects must cover more than 1.5 pixels of the image).  
② Recognition Distance: Classifies objects into general categories, such as human, vehicle (the object must cover more than 6 pixels of the image).  
③ Identification Distance: Classifies objects into specific categories based on their characteristics, such as engineering truck, car (the object must cover more than 12 pixels of the image).  
  
Note:  
The table is the standard theoretical calculation and is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more. For the intelligent detection distance, refer to the table of Perimeter Protection Distance (IVS Distance) above.

|                      |                                    |                                               |
|----------------------|------------------------------------|-----------------------------------------------|
| Ordering Information |                                    |                                               |
| Type                 | Model                              | Description                                   |
| Thermal Camera       | DHI-TPC-SD5641-B25Z45-DC-AC-S24-V1 | Thermal: 25 mm;<br>Visible: 3.95 mm–177.75 mm |
|                      | DHI-TPC-SD5641-B35Z45-DC-AC-S24-V1 | Thermal: 35 mm;<br>Visible: 3.95 mm–177.75 mm |
|                      | DHI-TPC-SD5641-B50Z45-DC-AC-S24-V1 | Thermal: 50 mm;<br>Visible: 3.95 mm–177.75 mm |
| Accessories          | PFA111A                            | Mount Adapter                                 |
|                      | 36 V/2.23 A                        | Power Supply                                  |
|                      | 10 A/250 V                         | Power Cord                                    |
|                      | PFB303WA                           | Wall Mount                                    |
|                      | PFB303WA + PFA120A                 | Wall Mount                                    |
|                      | PFB303WA + PFA120A + PFA155A       | Vertical Pole Mount                           |
|                      | PFB300CA                           | Ceiling Mount                                 |
|                      | PFB303WA + PFA120A + PFA151A       | Corner Mount                                  |

Accessories

Included:



PFA111A  
Wall Mount  
Bracket



36 V/2.23 A  
Power Supply



10 A/250 V  
Power Cord



PFB303WA  
Wall Mount  
Bracket

Optional:



PFB303WA + PFA120A  
Wall Mount  
Bracket




PFB303WA +  
PFA120A + PFA155A  
Vertical Pole Mount  
Bracket



PFB300CA  
Ceiling Mount  
Bracket



PFB303WA + PFA120A  
+ PFA151A  
Corner Mount Bracket

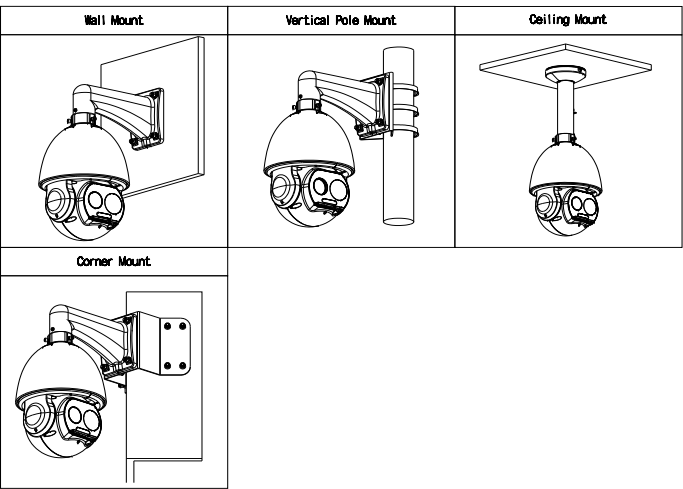

Dimensions (mm[inch])

