

DHI-VTO7541G-S3

IP Face Recognition Apartment Door Station



Functions

Video Intercom

Video intercom can be used with the Indoor Monitor (VTH), Master Station (VTS) and app.

Scene

Ideal for use in multiple scenes such as office buildings, compound buildings, communities, etc.

Technical Specification

System

Main Processor	Embedded Processor
Operating System	Embedded Linux OS
Button Type	Touch button
Interoperability	CGI;ONVIF
Network Protocol	TCP;RTMP;HTTP/HTTPS;DNS;RTSP;ONVIF;SIP;RTP

Basic

Screen Type	Capacitive Touchscreen
Display Screen	8-inch display screen
Screen Resolution	800 (H) × 1280 (V)
Camera	1/2.8" 2MP CMOS high-definition, low illumination, dual cameras
Field of View	H: 95°; V: 50°; D: 110°
WDR	120 dB
Noise Reduction	3D NR
Video Compression	H.264; H.265
Video Resolution	Main stream: 720P/D1/WVGA; Sub stream: 1080P/720P/D1/WVGA/CIF/QVGA
Video Frame Rate	25 fps
Video Bit Rate	1,024 kbps–8,192 kbps
Light Compensation	Auto white light

- 8" LCD with a resolution of 800 × 1280.
- 2MP HD camera/dual-lens camera.
- White light illuminators that help recognize the targets in darkness or low light environments.
- Supports 100,000 users, 50,000 faces, 50,000 cards, and 10,000 fingerprints.
- Recognizes faces 0.3 to 1.5 m away (0.98 ft–4.92 ft) at an accuracy of 99.9%, and compares 1 face with N faces at the speed of 0.2 seconds/person.
- Liveness detection is used to detect spoof attempt, such as using a photo or video to gain access.
- Receive and view text and image information released by the management center.
- Offers multiple types of alarms such as duress, tamper, emergency and alarms from door detectors.
- Supports leaving audio and video messages when no one responds through the indoor monitor. (an SD card is required)
- Supports multiple unlock methods including password, IC card, fingerprint, QR code(supported by DSS) and face, and unlocks remotely.
- Unlocks the door through the indoor monitor, management center and app.
- Provides 12 VDC, 500 mA power for the extension module or card reader
- IP65 rated (silicone sealant is required for the shell, see the quick start guide).
- Standard PoE power supply (If the VTO device with 12 V power output needs to charge the load, it should be connected to a PSE switch that complies with the 802.3.at standard).



Audio Compression	G.711a; G.711u; PCM
Audio Input	1 channel
Audio Output	Built-in speaker
Audio Mode	Two-way audio
Audio Enhancement	Echo suppression/digital noise reduction
Audio Bit Rate	16 kHz, 16 bit

Function

Communication Mode	Full digital
Verification Method	Fingerprint;Remote;Face Recognition;Card;Password

Apartment Door Station | DHI-VTO7541G-S3

Auto Snapshot	Yes
Information Release	Receive and view text information released by the management center.
Leave Videos	Yes (SD card is inserted in the indoor monitor or door station)
Storage	Supports Micro SD card (up to 512 GB)
Web Configuration	Yes
Auto Registration	Yes

RFID

Card Type	IC card
-----------	---------

Performance

Card Reading Distance	0 cm–4 cm (IC card)
Issue Card Locally	Yes
Face Recognition Height Range	1.1 m–2.2 m (3.61 ft–7.22 ft)
Face Recognition Distance	0.3 m–2.0 m (0.98 ft–6.56 ft)
Face Recognition Accuracy	99.9%
Face Recognition Time	0.2 sec
Fingerprint Sensor Type	Capacitive
Fingerprint Comparison Time	≤1.5 sec
Fingerprint Recognition Time	≤1 sec
Casing Material	Metal

Capacity

Card Capacity	50,000
Face Image Capacity	50,000
Fingerprint Capacity	10,000

Port

RS-485	1
Wiegand	1 (they can be set as an input or output port)
Alarm Input	2 channels
Alarm Output	2 channels
Power Output	1 port (12 V, 500 mA)
Exit Button	1 channel
Door Status Detection	1 channel
Lock Control	1 channel, open by default
Network Port	1 × 10 Mbps/100 Mbps Ethernet port

Alarm

Tamper Alarm	Yes
--------------	-----

General


Unlock Password Mode	User, public and duress passwords
----------------------	-----------------------------------

Appearance Color	Silver
Power Supply	12 VDC, 3 A; Standard PoE
Power Adapter	Optional
Installation	Flush Mount;Wall Mount
Certifications	CE
Accessory	Power supply (optional); Flush mount box (optional)
Product Dimensions	389 mm × 145 mm × 43.5 mm (15.31" × 5.70" × 1.71")
Protection	IP65 rated (Silicone sealant is required. See the quick start guide for more information).
Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	0%–90% (RH), non-condensing
Operating Altitude	0 m–1,300 m (0 ft–4265.09 ft)
Power Consumption	≤5 W (standby), ≤18 W (working)
Gross Weight	1.91 kg (4.21 lb)


Ordering Information

Type	Model	Description
Door Station	DHI-VTO7541G-S3	IP Face Recognition Apartment Door Station
Accessories	VTM130	Surface Mounted Box
	VTM121	Flush Mounted Box

Installation

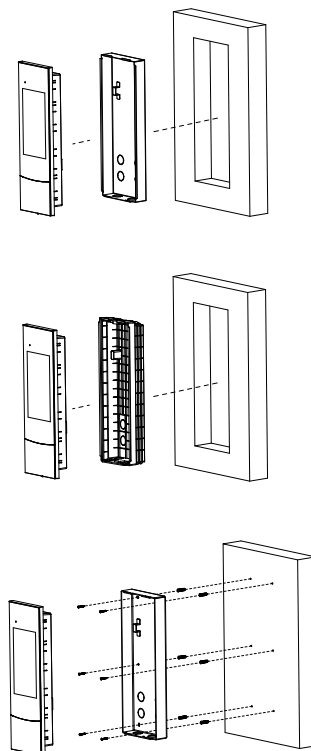

Dimensions (mm[inch])

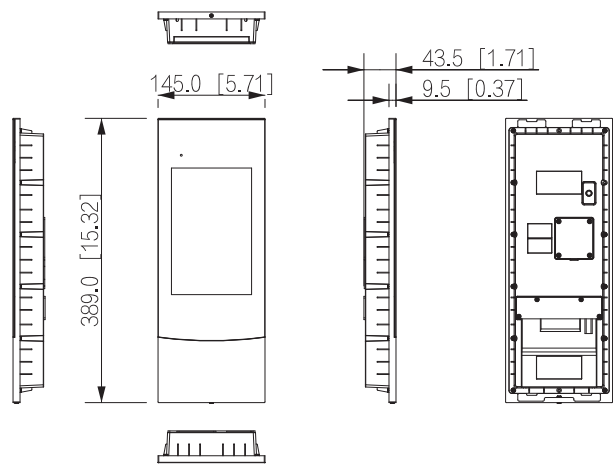

Application

