




ARCHITECTURAL DOOR HANDLE RANGE


MAGNETIC LOCK



DHM600-200

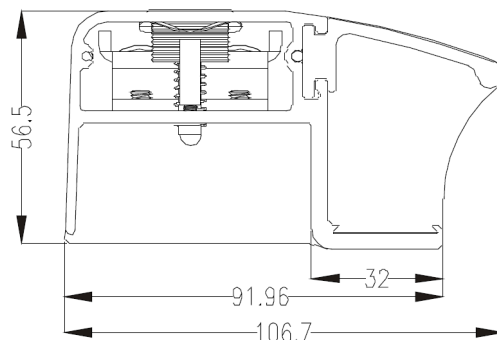

Handle Profile

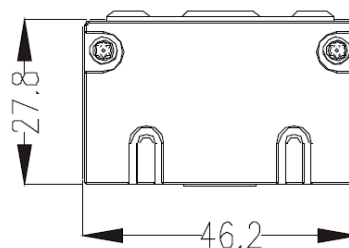

Magnet Profile

SPECIFICATION

- DHM600-200 & DHM600-200(A)
- Aluminium housing
 - 12/24VDC @ 920/460mA
 - 2 x 280kg (600lb) holding force
 - Built in surge protection
 - Monitored (door open or door closed detection)
 - Suitable for all **inward opening** wooden or aluminium doors
 - Delay timer 0/2.5/5/9 seconds
 - Built in exit button (DHM600-200)
 - Visible LED indication

If you do not wish to have the built in exit button, then please order DHM600-200(A)

FEATURES

DHM600-200 & DHM600-200(A)

- Slimline monitored magnet
- Built in timer delay
- No residual magnetism

Optional Bracket:

If the door and frame are not perfectly aligned, you may need to use the following bracket:

- DHM600-100P (2 x 1metre lengths)

OTHER PRODUCTS

EDR-N



1202SM-1



KS-EDR



KPX50



DIMENSIONS

DHM600-200

1980 x 92 x 58mm / 1955 x 46.2 x 30mm
13.5kg

DHM600-200(A)

1980 x 92 x 58mm / 1955 x 46.2 x 30mm
13.5kg


CONTENTS

DHM600-200 & DHM600-200(A)

- Magnetic Lock
- Door Handle with built in armatures
- Fixing Kit
- Fixing template



Manufactured by a BSIA Member

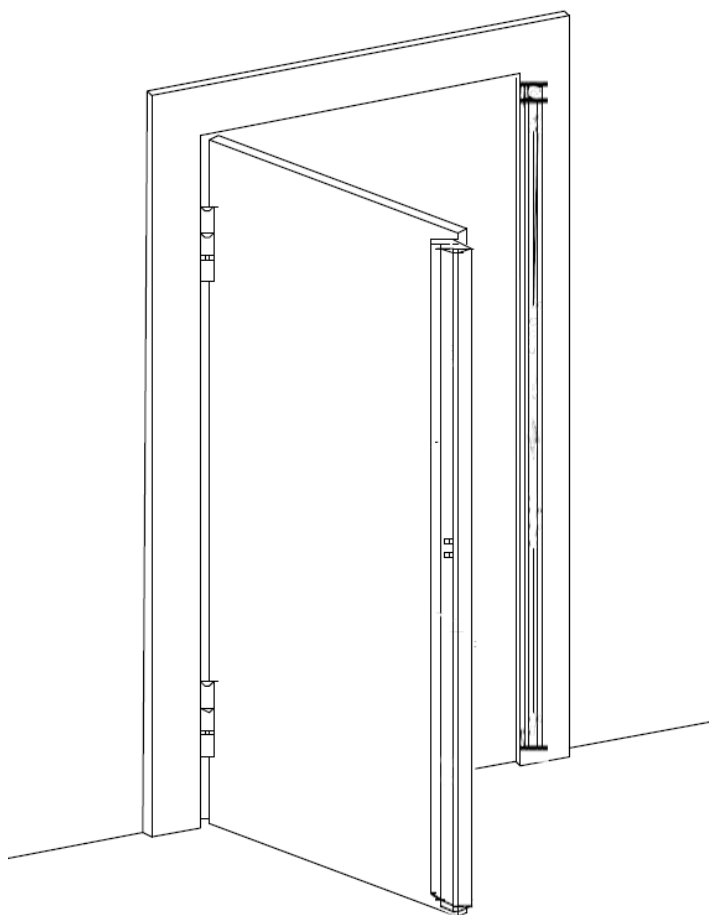

**Other products available
in the range:**



DHM600(A)



DHM600-60



DHM3/2

