


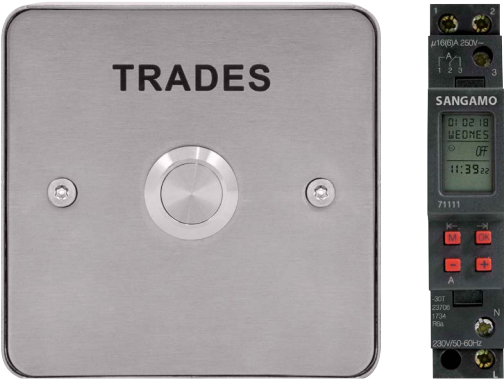

Component 1

EVTR - Push Button 'Trades'

Quantity

1

General Information

Dimensions (mm)	85.5 x 85.5 x 43.5
Colour	Silver
Materials	Stainless Steel
Mounting	Surface Only
Weight (Kg)	0.315

Supply & Power

Maximum Cable Size (mm ²)	2.5
Operational Life	100000
Contact Type	SPDT
Operation Type	Mechanical Retractable Switch
Total Switch Rating	30A (@250V AC)

Environment

Ingress Protection	IP66
Operating Temperature (°C)	-20 to +70

Component 2

71111 - Standard 1 Module 1 Channel, 7 Day, 46 Operations

Quantity

1

General Information

Dimensions (mm)	90 x 17.8 x 63
Materials	Self-Extinguishing Thermoplastic
Mounting	Surface Mounting or DIN
Available Operations	46 Operations
Display	LCD Display
Time Base	Quartz Crystal
Quartz Crystal Accuracy (at 20°C)	≤ ± 0.5 Seconds / Day
Distribution Board Mounting	35mm DIN-rail (DIN EN 60715)
Supply Voltage (V AC)	230
Cable Size (mm ²)	0.5 - 2.5
Power Consumption (W)	0.2-1
Battery Type	Replaceable CR2032
Contact Type	SPDT
Total Switch Rating	230V AC, 16A @ 1.0pf
Output Contact Type	SPDT
Power Reserve @ 20°C	10 Years (Approx.)
IEC Protection Class	Class II When Installed According to Regulations
Programming Schedule	24 Hour, and 7 Day Programmable
Switching Modes	ON, OFF, Pulse
Summer/Winter Time Change	Yes (Automatic)
Program Security	Unlimited (E2-PROM)
Pulse length - Pulse function (switching time)	00:01 up to 59.59 mm:ss
Pulse length - Timer (man. switching)	0:00:01 up to 9:59:59 h:mm:ss
Maximum LED Lamp Load Rating (W)	50 @ 230V
Contact Material	AgSnO ²
Maximum Incandescent, Halogen Lamp Load Rating (W)	400
Maximum Compact Fluorescent Lamp Load Rating (W)	50
Maximum Starting Current (A)	30
Maximum Fluorescent Lamp with Electronic Ballast Load Rating (W)	100
Maximum Fluorescent Lamp with Conventional Ballast Load Rating (W)	100
Minimum Switching power (mW)	300 (10V/10mA)
Ingress Protection	IP20
Operating Temperature (°C)	-30 to +55

Warranty Years 2

