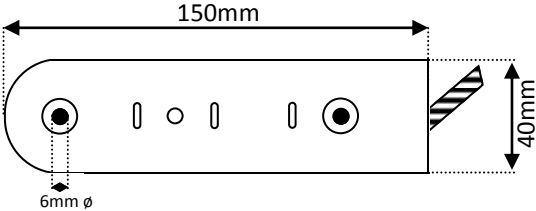

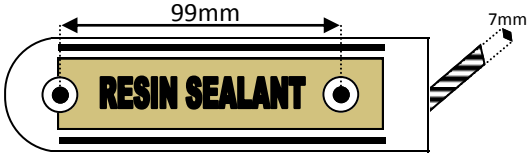





TOP	CONTACT		TOP	MAGNET		DESCRIPTION Grade 2, Class III R/S contact 4 wire armoured cable prefitted. 18" cable length. Single reed, normally open. (Open circuit when magnet present).			
							VARIANTS None.		
									
								ACTIVATION Reed switch, ~50mm operating gap. N/O operation.	
									
BOTTOM			BOTTOM			WIRING White REED Red TAMPER LOOP			
LATERAL			LATERAL				MATERIALS Anodised AA15 aluminium casting. Ferrite/Alnico V magnet. Rhodium reeds. Stainless steel armour sleeving.		
REAR END			REAR END					TEMPERATURE RANGE -40 to +50 degrees Celsius.	
PHOTO			PHOTO						ELECTRICALLY RATED AS FOLLOWS 500mA Max DC. 500mA Max AC. 1 – 100v DC. 125v AC Max.

 KNIGHT FIRE & SECURITY	Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH Tel: +44 (0) 2920 488 129 Fax: +44(0) 2920 489 132	Drawing #: F40 Drawn: Gareth Carpenter Date: 01/07/2017 Revision: 1	All dimensions in mm Do not scale	
			© Knight Fire & Security Products Ltd All cases of infringement will be pursued.	