



FIREMANS SWITCH

ACCESSORIES

RGL has a broad range of accessories that complement our access control range.



FMS-SURF



FMS-FLUSH



FMS-KEY

SPECIFICATION

- FMS
- NO/COM/NC
 - Changeover contacts
 - Tamper proof fixings
 - Switching capacity
 - 5A at 125VAC
 - 3A at 250VAC
 - Stainless steel

FEATURES

- FMS
- Flush or surface mount options
 - Drop key units
 - Key not included with units
 - Allows firefighters to quickly disconnect power in an emergency

OTHER PRODUCTS

DR-01/W



2402/4TRS



ML600



DU-CB/PTE




DIMENSIONS

FMS-FLUSH - 127x157x76 (mm) - 676g (Unboxed)

FMS-SURF - 125x155x76 (mm) - 908g (Unboxed)

CONTENTS

FMS-SURF
FMS-FLUSH
FMS-KEY

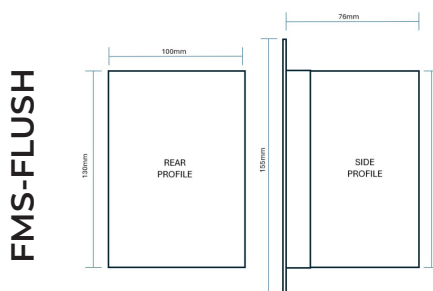

Manufactured by a BSIA Member