

AIPHONE



GT SYSTEM

Video Multi-Tenant System

GT system is ideal for large scale residential Style mixed with IP technology. Enable



5,000

**Aiphone's multi-tenant system
can now serve up to 5,000 residences.**

► P08

- Install one system for housing complexes with multiple buildings.
- Cover a building with more than 500 units with one system.

7-inch

Designed to be even easier to use.

► P05

- Tenant station features a clear 7-inch display.
- Compact and intuitive functional design.



**IP and NFC technologies enable
effective management.**

► P09

- Building management from anywhere via IP network connection.
- Built-in NFC reader for easy programming and tenant management.

developments with multiple buildings.
creation of new solutions.



Multi
building
development



Large scale
residential
building



Gated
community/
Villa


GT-1C7



Tenant Station

7-inch display (GT-1C7)

- High-resolution, 7-inch display makes visitors easy to recognize.
- Functional design, intuitive control: illuminated easy-to-see buttons for door release and communication during calls from entrances.



Wide / Zoom & PanTilt



- Panoramic Wide Angle View

To provide effective security, GT System features a wide angle camera that enables you to see a clear panoramic view. Easily see and identify visitors standing on the sides and people of all heights.



Wide Image





Zoom Image



PanTilt Image (GT-1C7, GT-2C only)

Door release

- Confirm the visitor and surroundings then open the entrance from inside.



Selection of tenant stations for all needs



GT-1C7
Color display tenant station
• 7-inch display
• Hands-free



GT-1M3
Color display tenant station
• 3.5-inch display
• Hands-free



GT-2C
Color display tenant station
• 3.5-inch display
• Picture memory
• Optional individual door station
• Optional handset (GT-HS)



GT-1A
Audio tenant station
• Hands-free



GT-1D
Audio tenant station
• Handset

Entrance Station

All-in-one type / Module type

Module type

All-in-one type GT-DMB-N




Panoramic view angle & clear color image



- 170° angle wide view camera.
- White light LED illuminates automatically in low-light conditions.

Optional security camera for more security



- Connect an additional CCTV camera. You can select one of the cameras placed at the entrance for monitoring. This allows you to confirm visitors from various angles, thus enabling the prevention of intrusion by suspicious individuals.

NFC Reader



- Use the NFC reader or access codes for lock control.
- The NFC reader can also be used for programming the system. (→P.09)

2 panel styles

- 2 styles to choose from: All-in-one type or Module type.
- Module type allows audio only and other configurations.



All-in-one type



Module type

Guard Station



3.5-inch display

- Easy operation for all guard functions.
- Video monitoring of entrance stations.

Wide / Zoom & PanTilt

- See the 170° wide view video from the entrance stations.
- Use zoom and pantilt functions for a detailed view.

Reception mode function

- Using this function, all entrance station calls are automatically transferred to the guard station, giving the security guard the ability to screen visitors.



Can connect an individual video door station (JO-DV)

- Automatic LED illuminator for low light conditions.



JO-DV

System Variation


Single building system

- Ideal for small- and medium-size residential buildings.
- Audio only configuration also possible.

Maximum Capacity

	Tenant building / section	
	Standard system	Expanded system
Entrance station	5	16
Guard station	2	4
Tenant station	48 ^{*1}	500

*1: Up to 100 GT-1D audio tenant stations can be connected when configuring a standard audio only system.

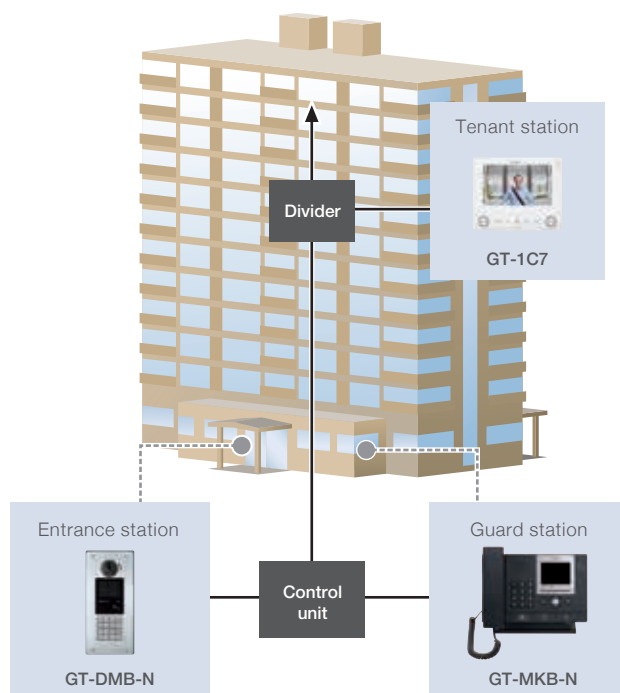

5,000

Multi building system

- Install one system for housing complexes with multiple buildings.
- Cover a building with more than 500 units with one system.
- Building management from anywhere via IP network connection.
- Audio only configuration for tenant buildings also possible.


Maximum Capacity (Number of stations are per building / section)

	Tenant building / section		Main building / section	
	Standard system	Expanded system	Standard system	Expanded system
Entrance station	4	15	4	15
Guard station	1	3	1	3
Tenant station	48	500	—	—

Total maximum capacity

(Total for tenant building / section and main building / section)

Entrance station	480
Guard station	96
Tenant station	5,000

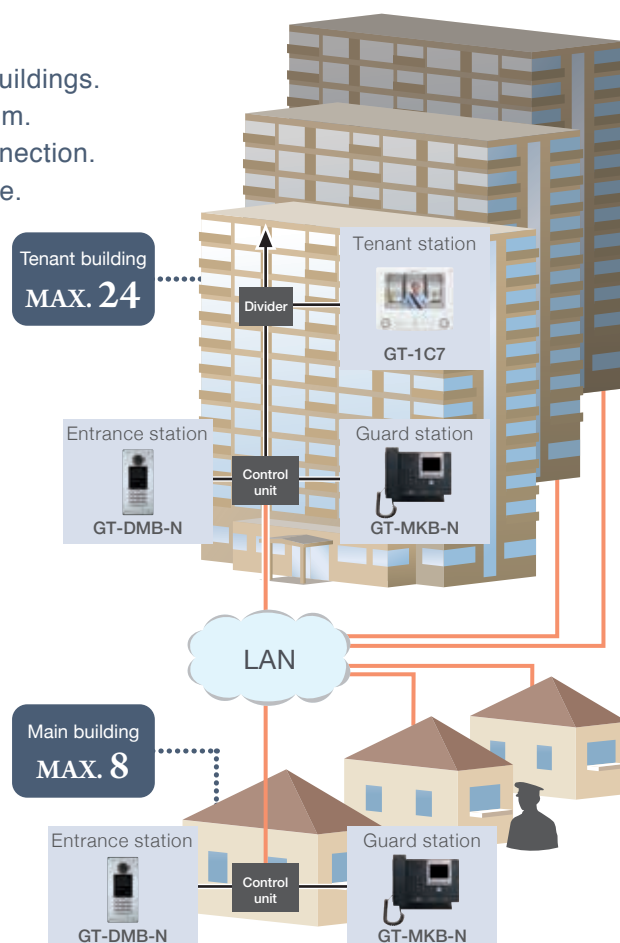




IP technology



GT-MCX
Multi-building control unit

- Multiple tenant buildings and main buildings can be connected via an IP network to create a multi building system for centralized management.
- A maximum of 24 tenant buildings and 8 main buildings can be connected.
- Multiple tenant buildings can be combined to accommodate large-scale residential buildings with more than 500 units.
- Connects buildings together and enables communication.

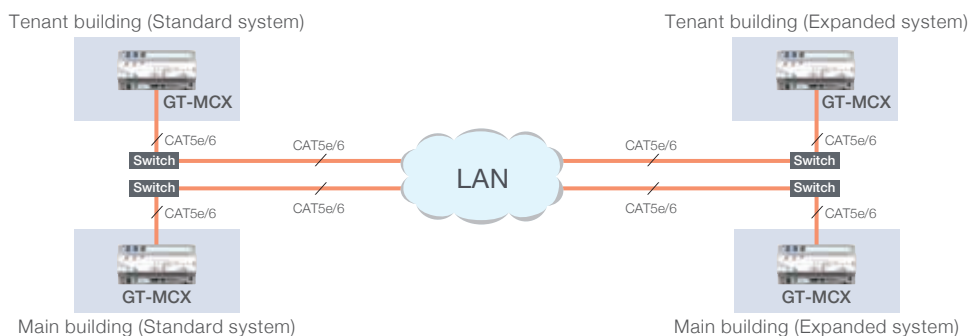

System programming and NFC technology

Easy system setting on a PC or Android mobile device

- Settings can be made from a PC or Android mobile device by using GT Setup Tool.
- Supported OS: Windows 7, 8.1, 10.*1
- Supported Android OS version: Android 5.0 and greater.

*1: For operating systems not listed, please contact your Aiphone dealer.




GT Setup Tool for Windows




GT Setup Tool for Android

Uploading the setting data


Uploading using an Android mobile device for GT-DMB-N, GT-DB-VN, GT-MKB-N, GT-BCXB-N (W/NFC reader)

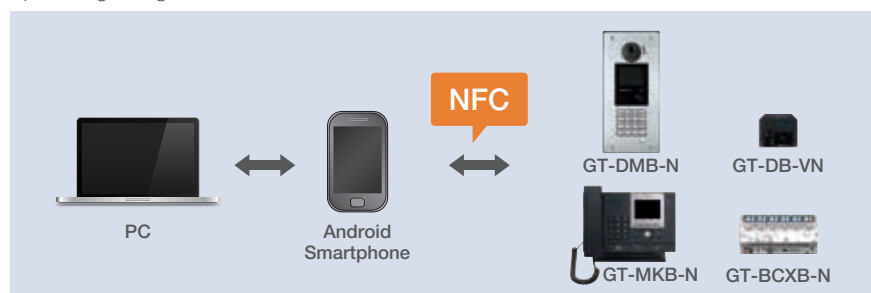

Connecting a unit to a PC via USB

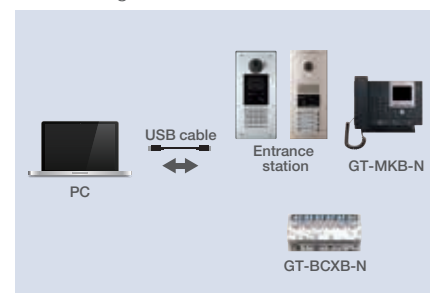

Uploading using a network connection

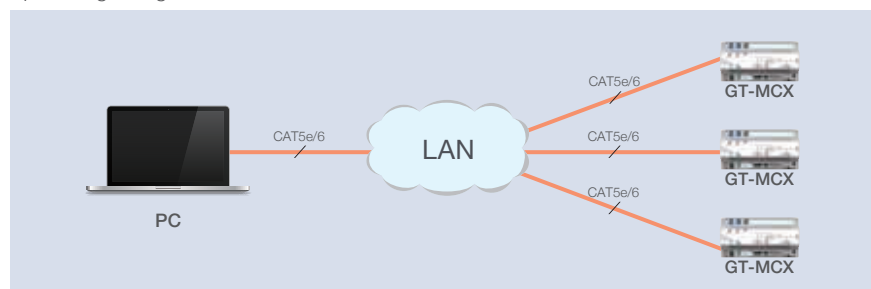

Installation example


e.g. 4 Tenant buildings (4 Entrance stations, 4 Guard stations, 1,060 Tenant stations)
2 Main buildings (2 Entrance stations, 6 Guard stations)

- Can be configured as a single system without creating separate systems for each building.
- Connect buildings through an IP network. Ideal for large sites with long distances between buildings.
- The main building can communicate with all tenant buildings.

Proposed system:

- 1 Standard system, 3 Expanded systems in tenant buildings.
- 2 Expanded systems in main buildings. (Maximum capacity → P.08)

*Possible to mix video and audio only systems.

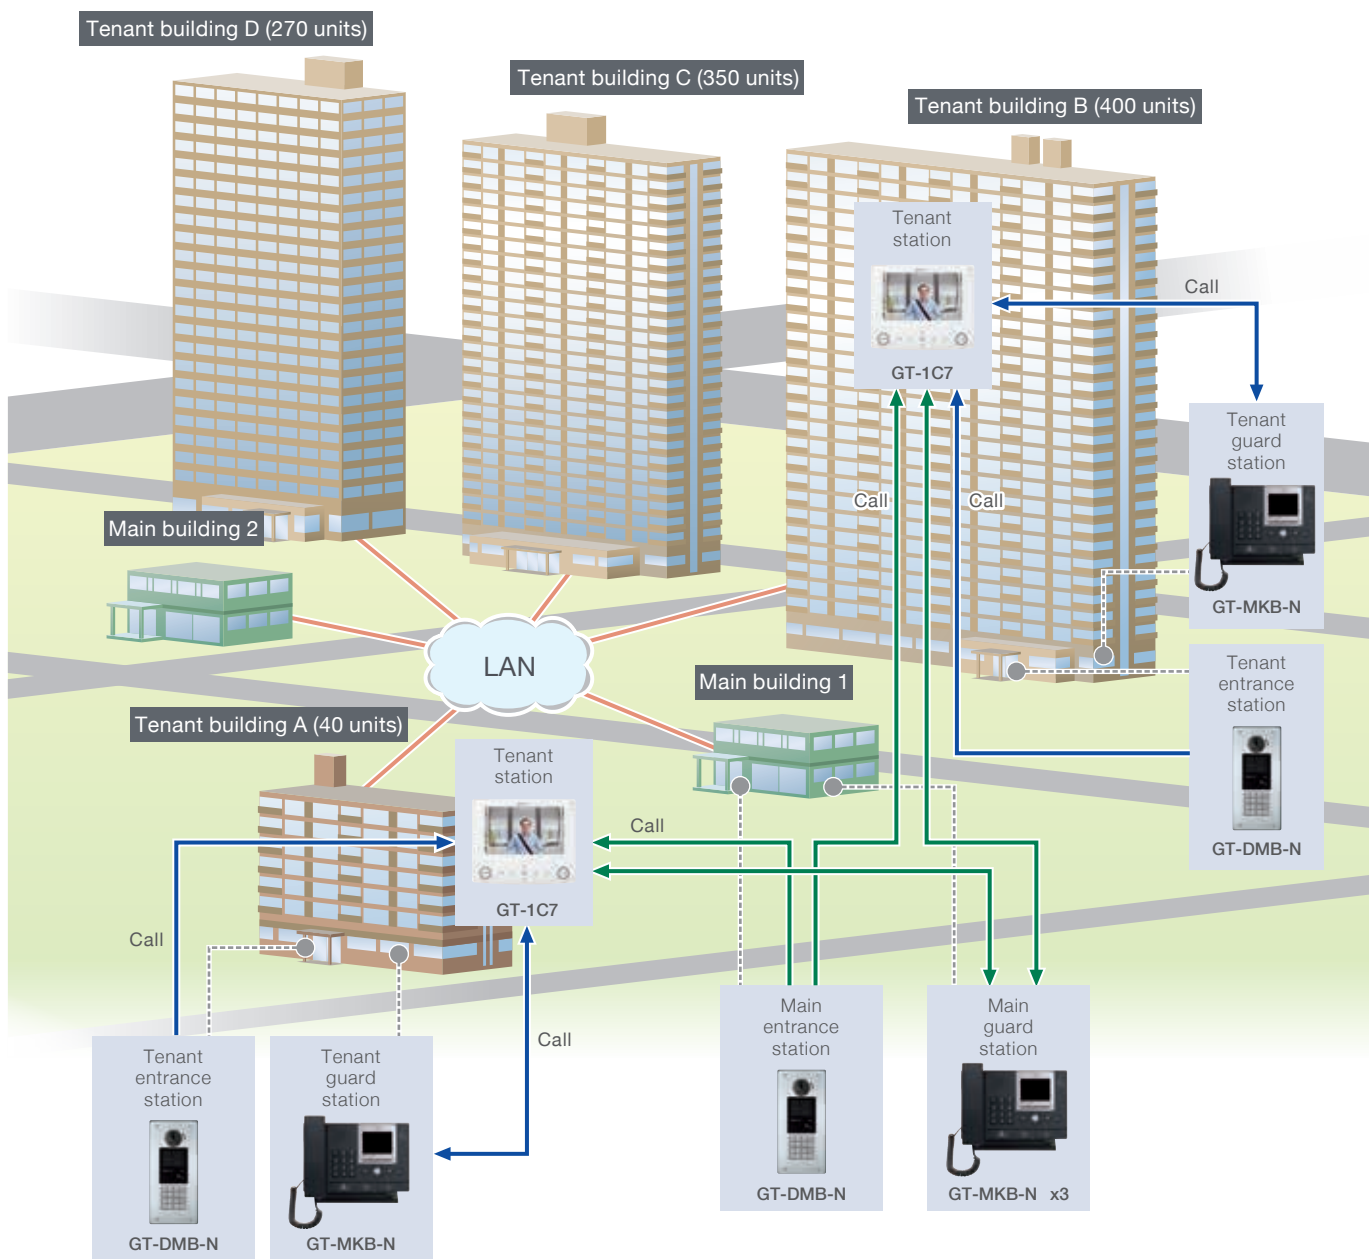


Tenant building A, B, C, D: In the above example, tenant buildings mean residential buildings and towers.

Main building 1 & 2: In the above example, main buildings mean buildings such as security centers and administrative offices.

System configuration example



Tenant building A: 40 units (Standard system)

Total max. wiring distance is 2,500m.
Do not mix wiring methods within individual trunk lines.

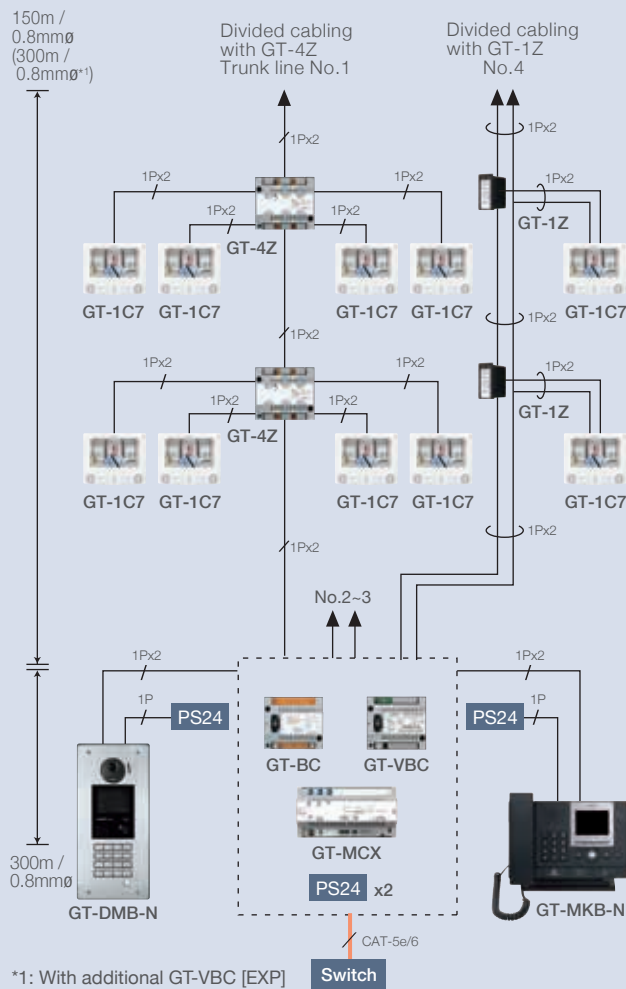


Tenant building B: 400 units (Expanded system)

4 sub trunk lines (SUB1A, 1B, 2A, 2B)
Max. 125 Tenant stations and max. 2,500m wiring distance for each sub trunk line. Total max. wiring distance is 10,000m.
Do not mix wiring methods within individual trunk lines.

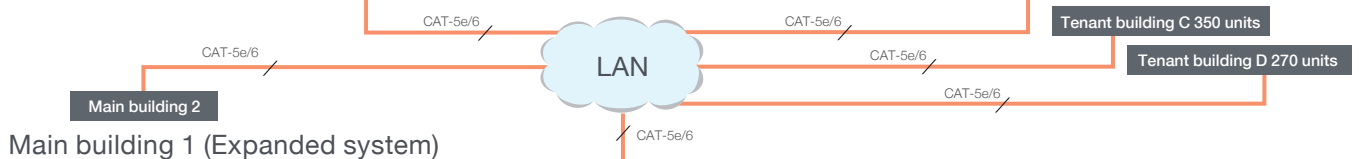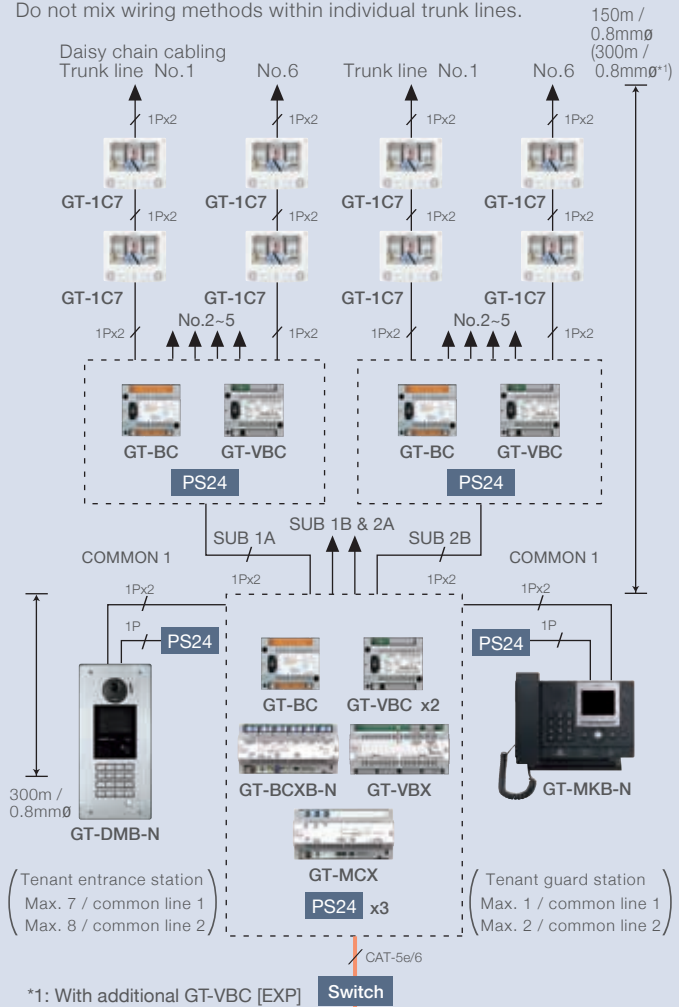

Main building 1 (Expanded system)

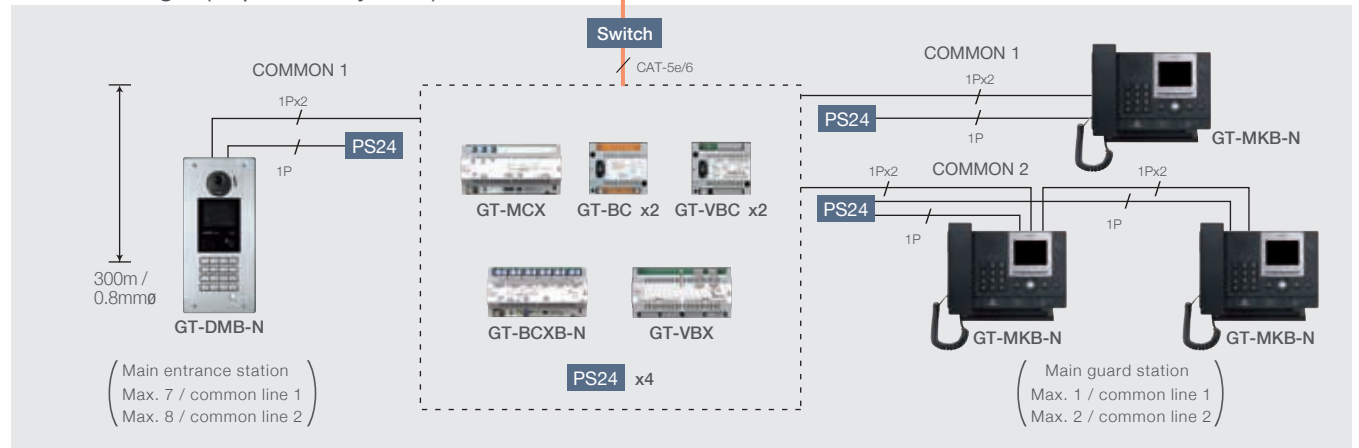

*Cable: 1Px2, 2-conductor cable solid copper & non-braided, polyethylene insulation.

Large Scale Residential Building (more than 500 units)

Installation example

e.g. 3 Tenant sections (1,100 Tenant stations)

1 Main section (3 Entrance stations, 3 Guard stations)

- Multi-building control units allow systems to be configured without having to use separate systems for each section.
- All tenant stations can be called from any entrance station or guard station.


Proposed system:

3 Expanded systems in tenant sections

1 Expanded system in main section


(Maximum capacity → P.08)

*Possible to mix video and audio only systems.

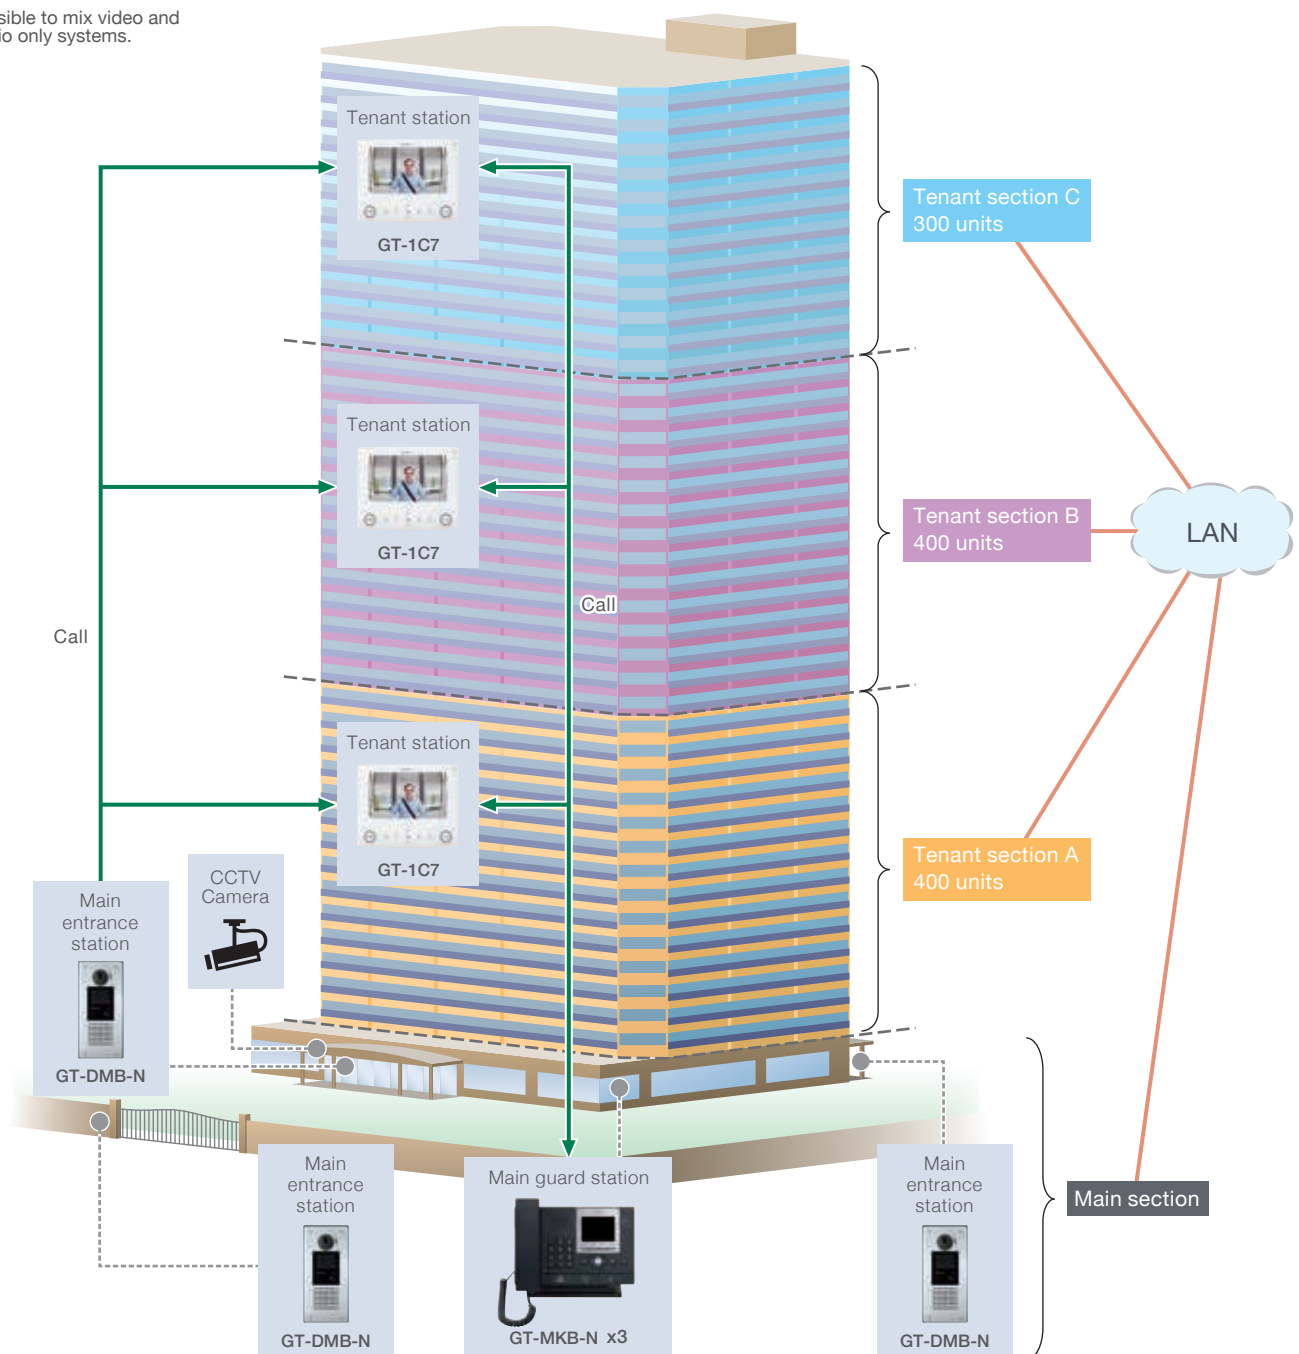


Main section: In the above example, main section means lobby and main entrance.

System configuration example

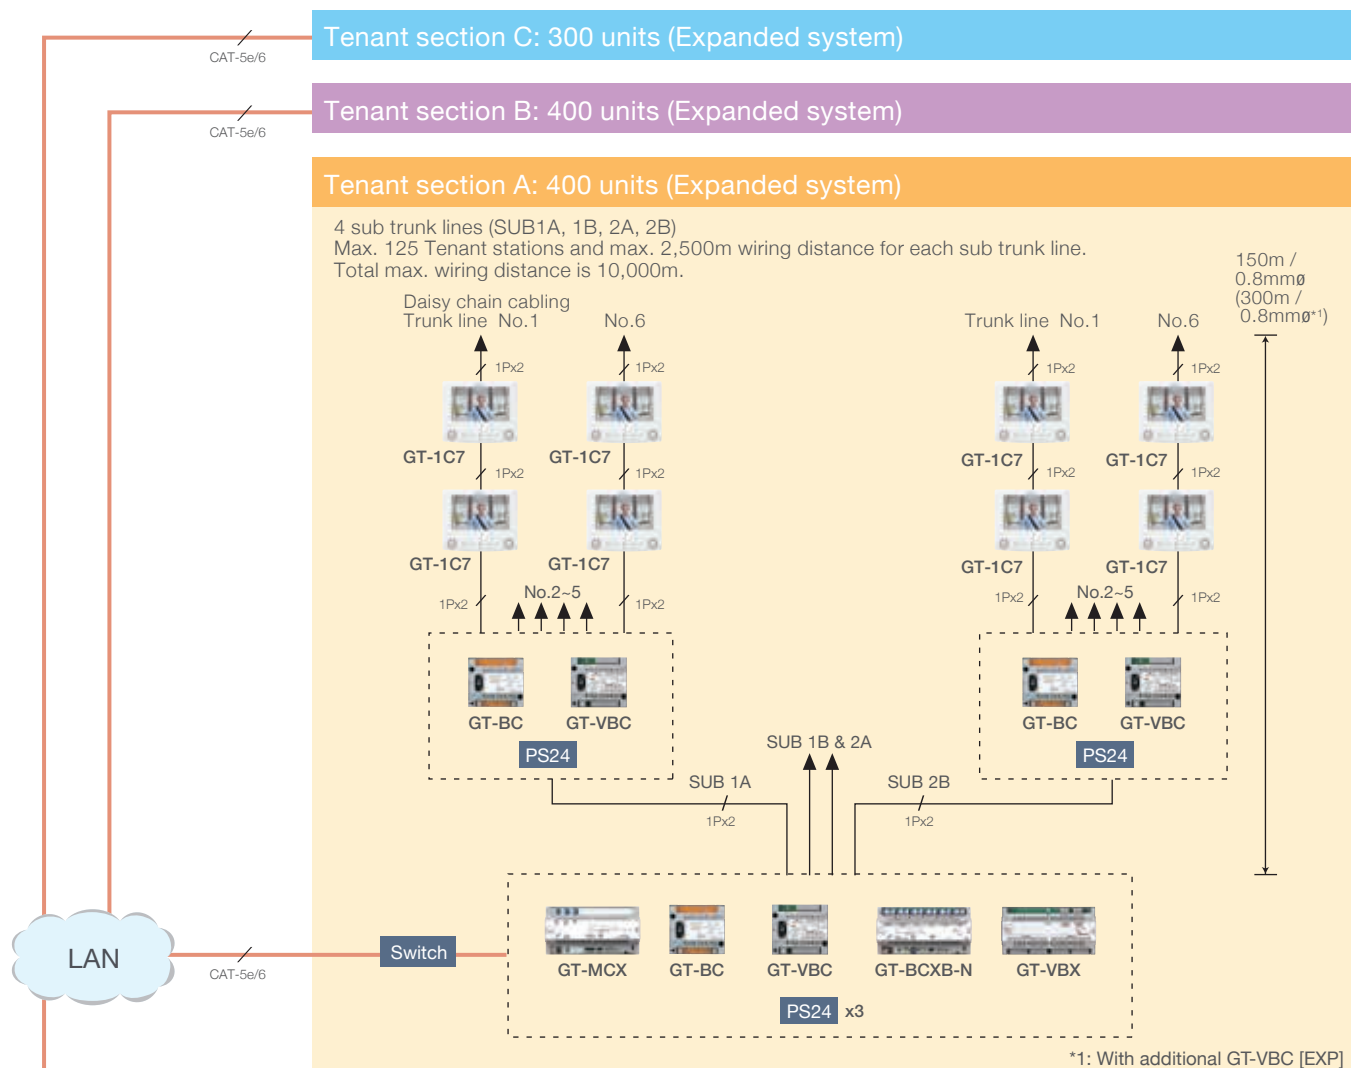

Main section (Expanded system)

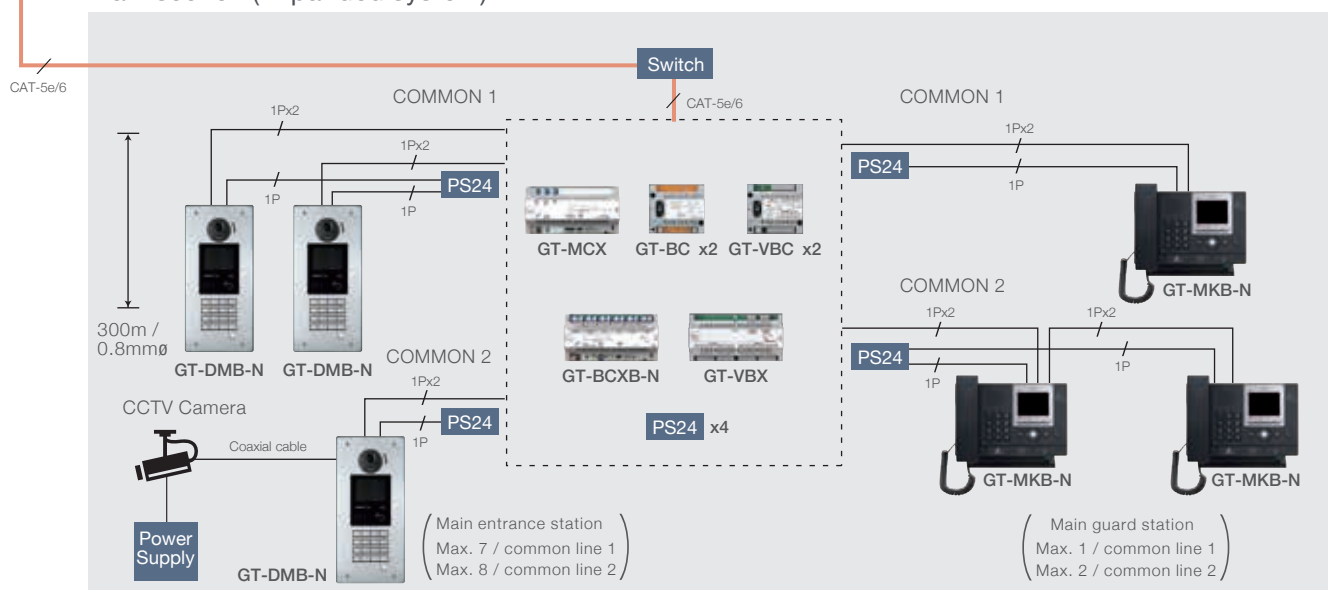

*Cable: 1Px2, 2-conductor cable solid copper & non-braided, polyethylene insulation.

Installation example

e.g. 2 Tenant sections (60 Tenant stations)

1 Tenant building (1 Entrance station, 1 Guard station, 400 Tenant stations)

1 Main section (1 Guard station)

- All sections (buildings) can be configured in a single system without creating separate systems for different types of buildings.
- Connect sections through an IP network. Ideal for large sites with long distances between sections.
- The main section can communicate with all tenant sections.


Proposed system:

2 Standard systems in tenant sections.

1 Expanded system in tenant building.

1 Standard system in main section. (Maximum capacity → P.08)

*Possible to mix video and audio only systems.

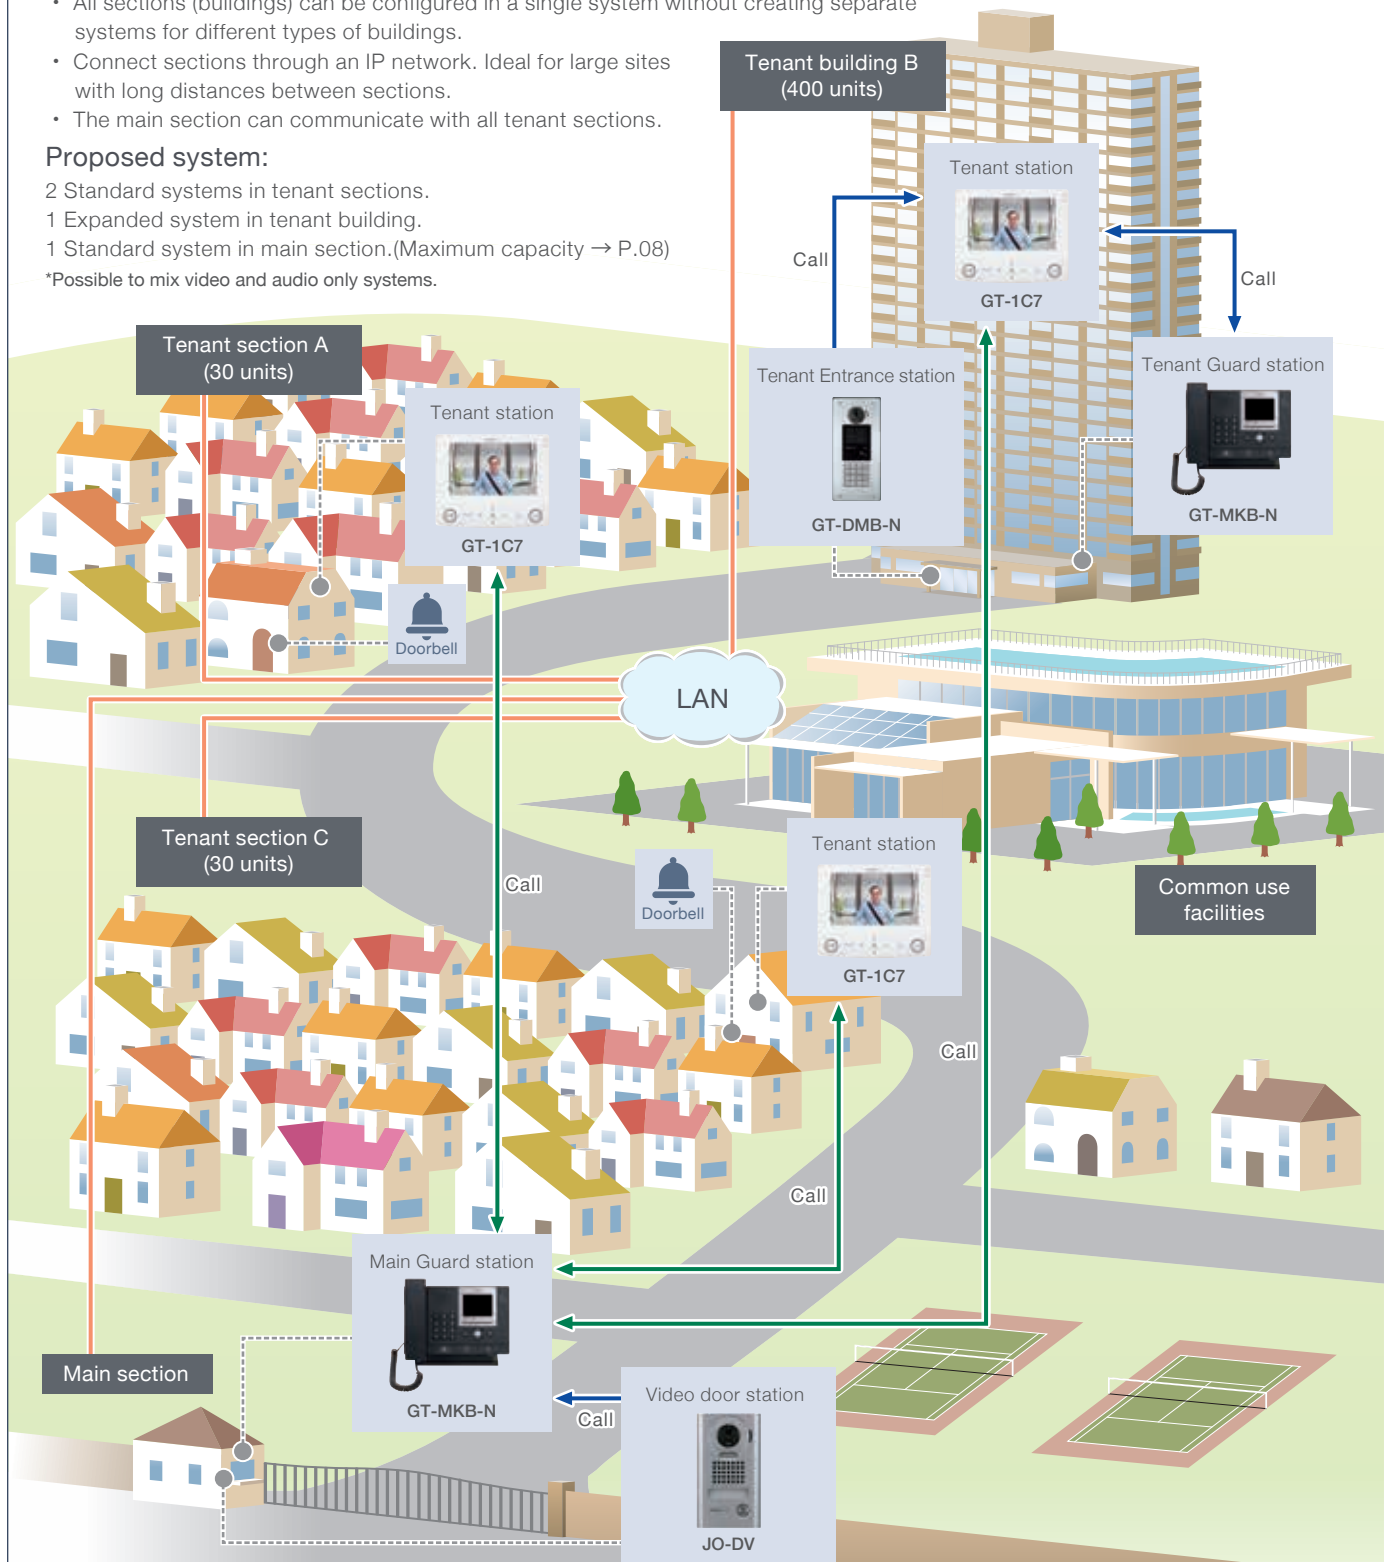

Tenant section A, C: In the above example, tenant sections mean individual housing sections.


Tenant building B: In the above example, tenant building means residential tower.

Main section 1: In the above example, main section means buildings such as security centers and administrative offices.

System configuration example


Tenant section A & C: 30 units (Standard system)

Total max. wiring distance is 2,500m.
Do not mix wiring methods within individual trunk lines.

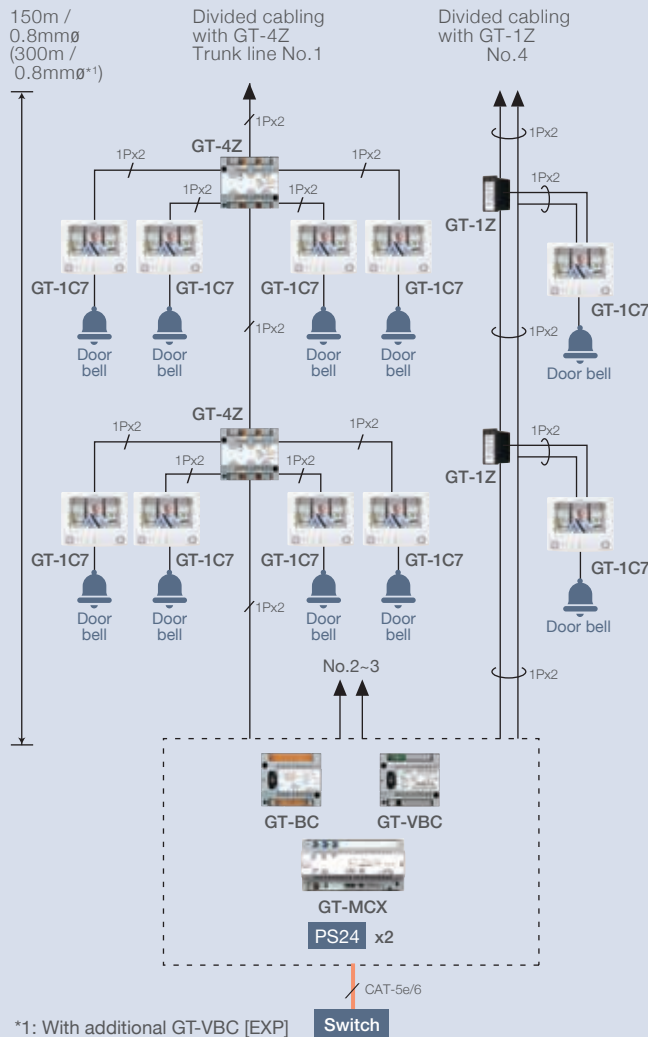


Tenant building B: 400 units (Expanded system)

4 sub trunk lines (SUB1A, 1B, 2A, 2B)
Max. 125 Tenant stations and max. 2,500m wiring distance for each sub trunk line. Total max. wiring distance is 10,000m.
Do not mix wiring methods within individual trunk lines.

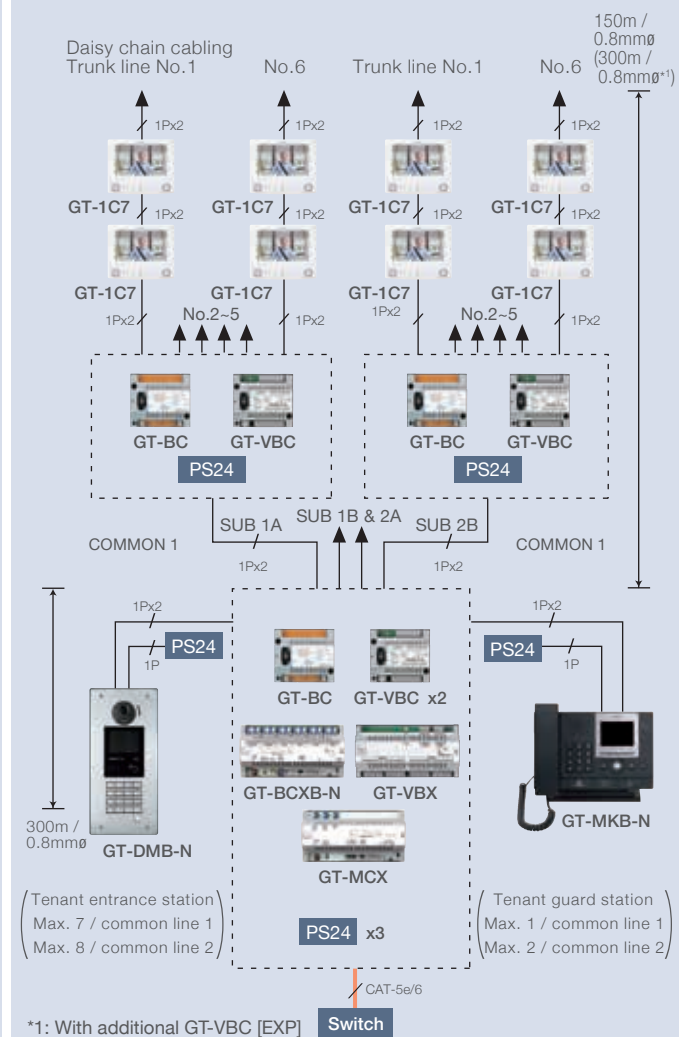

Main section (Standard system)

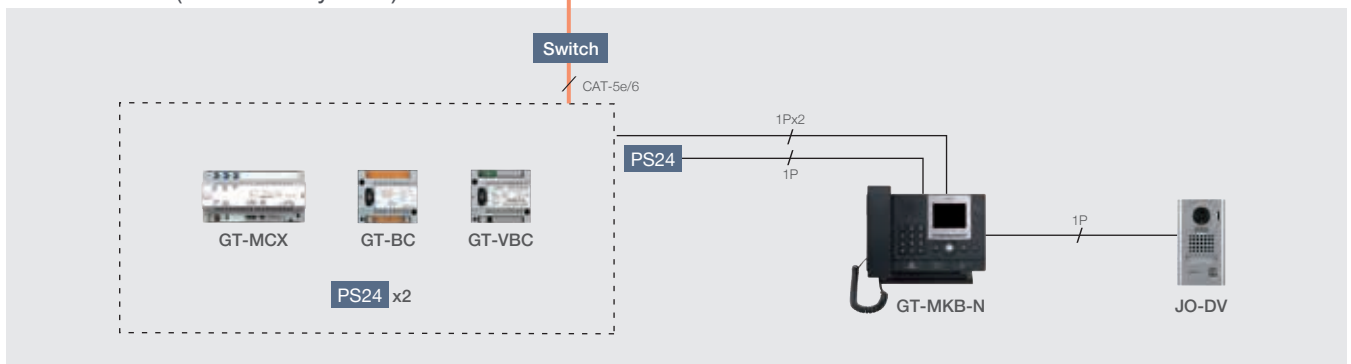

*Cable: 1Px2, 2-conductor cable solid copper & non-braided, polyethylene insulation.

Small Residential Building (e.g. 20 units)

Installation example


e.g. 1 Tenant building (1 Entrance station, 1 Guard station, 20 Tenant stations)

Proposed system:

1 Standard system in tenant building.


(Maximum capacity → P.08)

*Possible to mix video and audio only tenant stations.

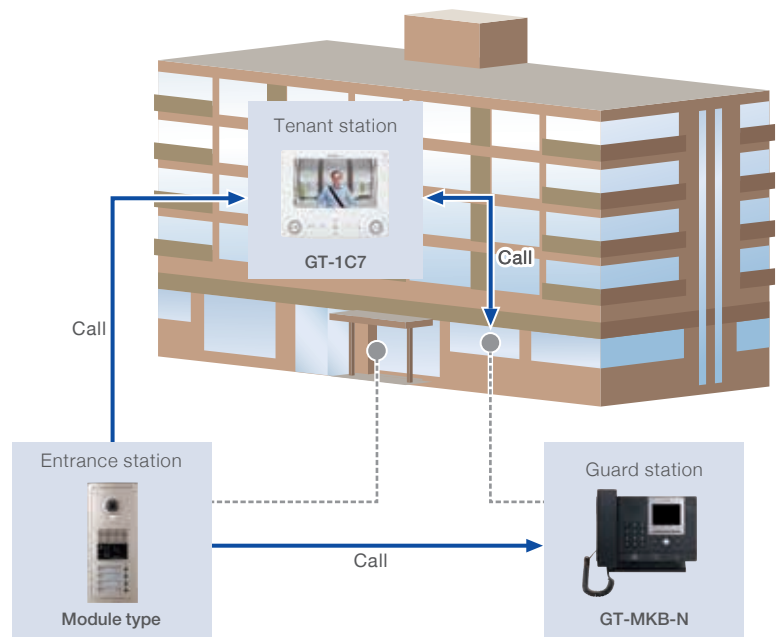

System configuration example

Total max. wiring distance is 2,500m.

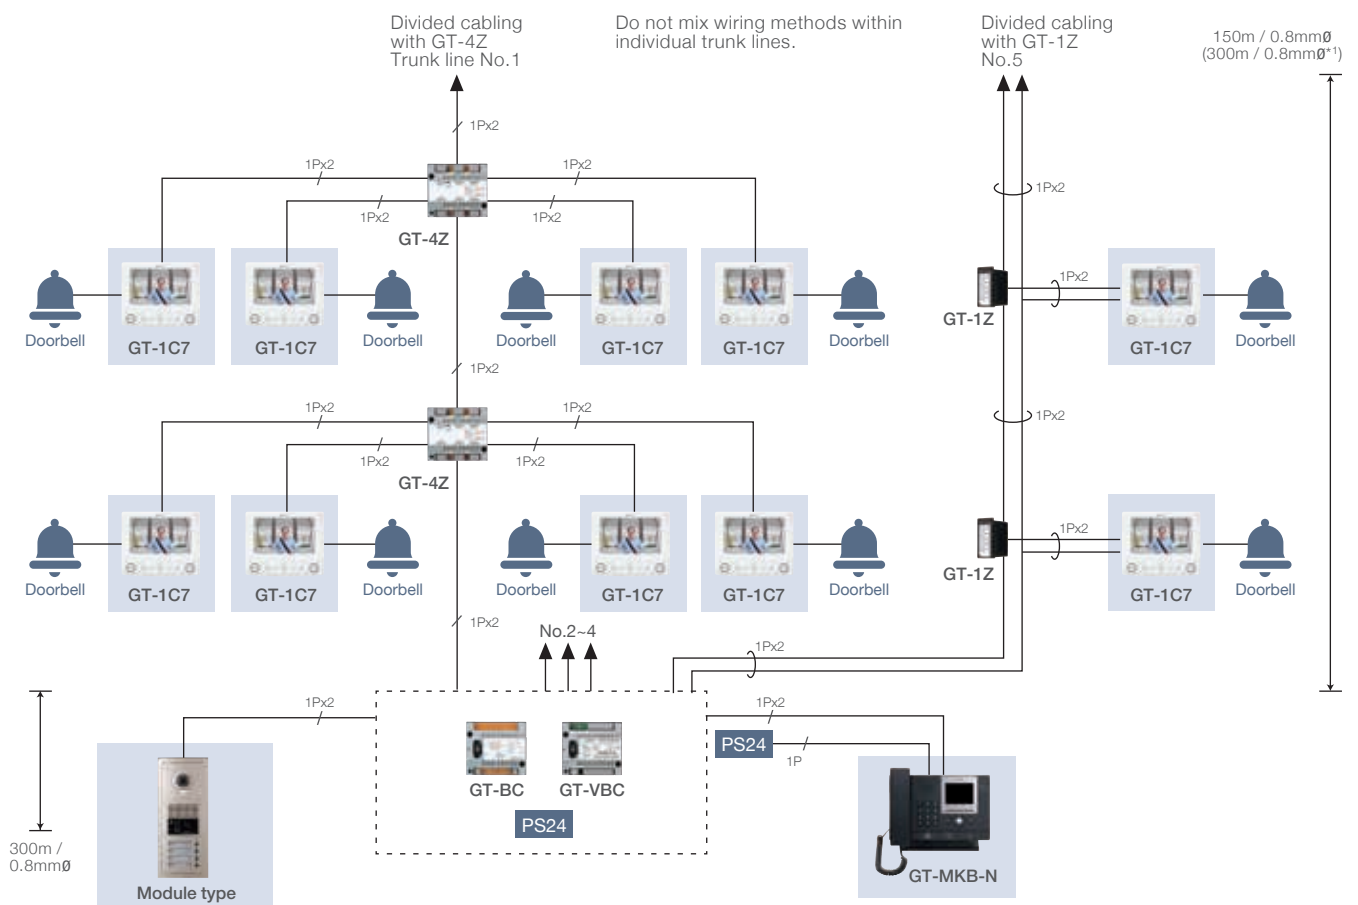

Medium-Size Residential Building (e.g. 150 units)

Installation example


e.g. 1 Tenant building (2 Entrance stations, 2 Guard stations, 150 Tenant stations)

Proposed system:

1 Expanded system in tenant building.

(Maximum capacity → P.08)

*Possible to mix video and audio only tenant stations.

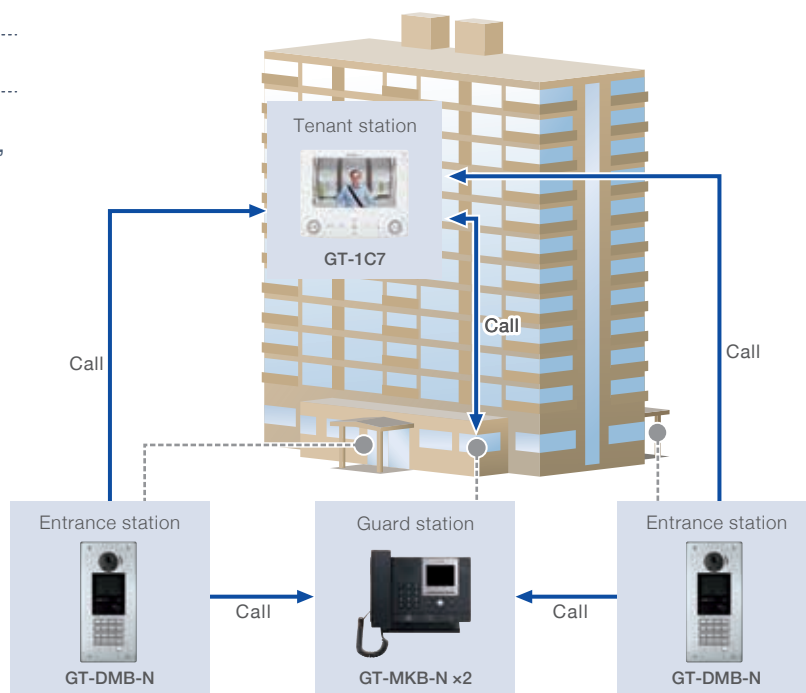


System configuration example

4 sub trunk lines (SUB1A, 1B, 2A, 2B)

Max. 125 tenant stations and max. 2,500m wiring distance for each sub trunk line.

Total max. wiring distance is 10,000m.

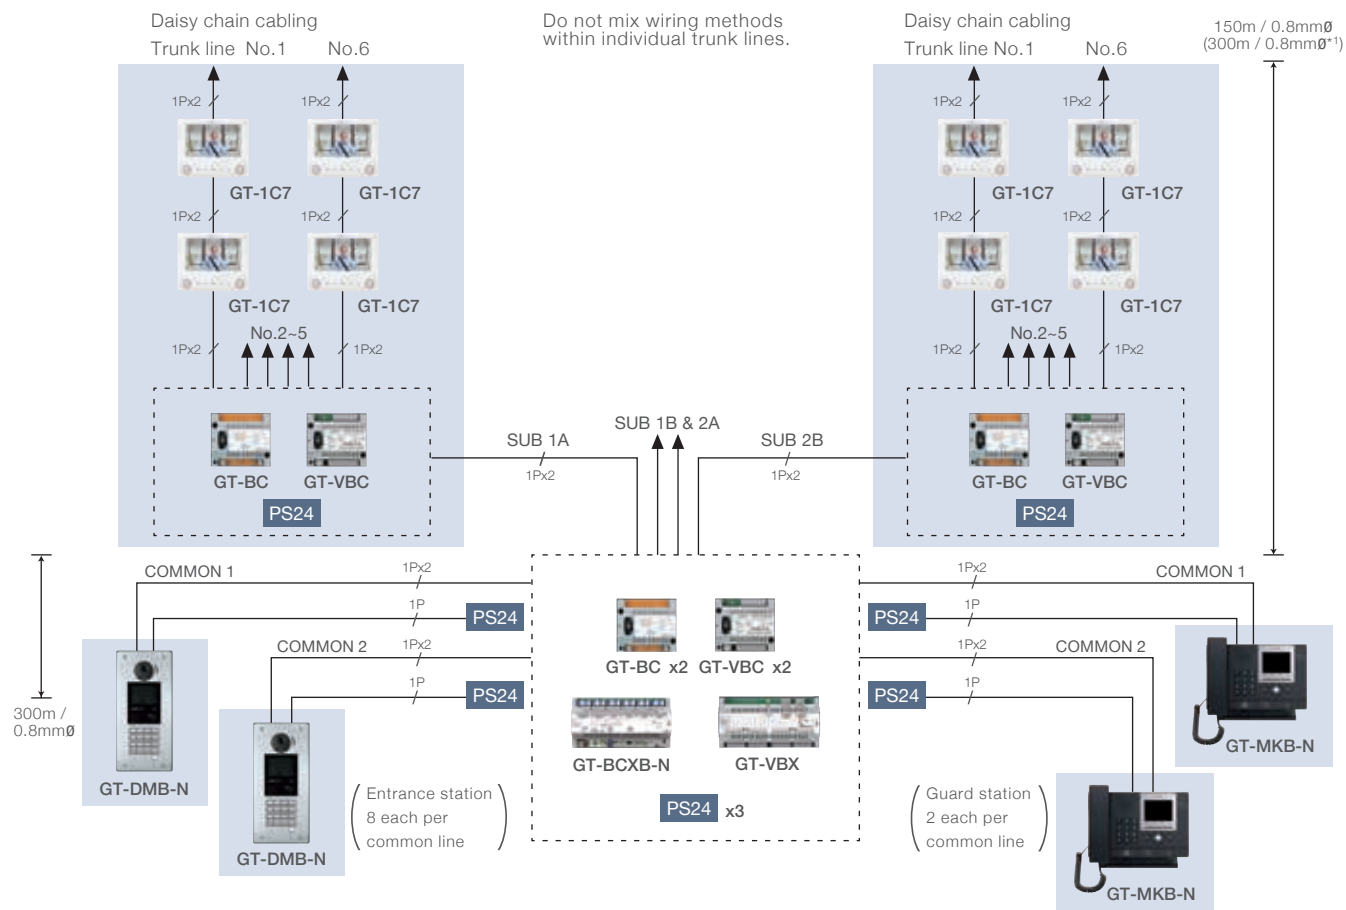

Entrance station


All-in-one type



GT-DMB-N
Entrance station
W/NFC reader
(Back box not included.)
Use GF-3B.

- 170° angle wide view camera.
- Audio & visual guidance to provide visitors status and operation assistance.
- Search names and numbers using the keypad.
- Custom programmable welcome messages can be displayed.
- 9 languages (English, French, German, Spanish, Dutch, Italian, Norwegian, Turkish and Finnish) are available for messages on Guidance display.
- 6 languages (English, French, German, Spanish, Dutch and Norwegian) are available for audio guidance.
- White light LED illuminates automatically in low-light conditions.


Module type

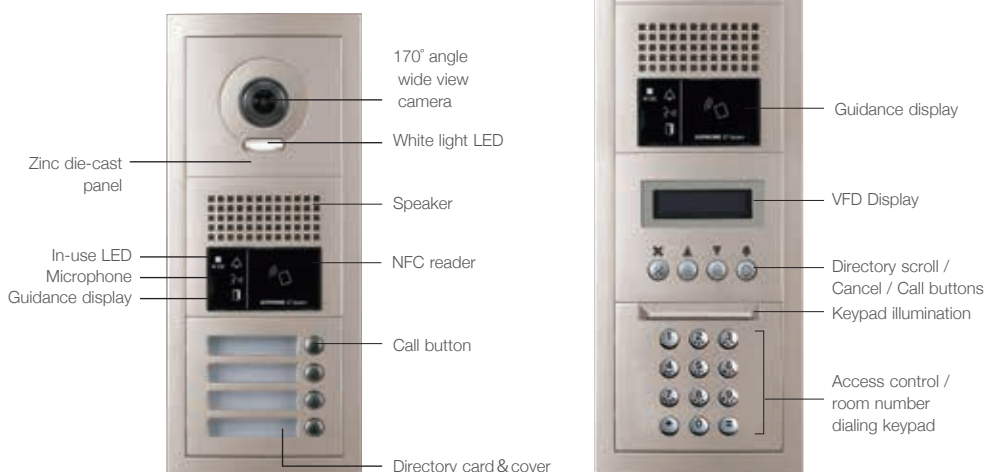

Camera Module



Call switch Module

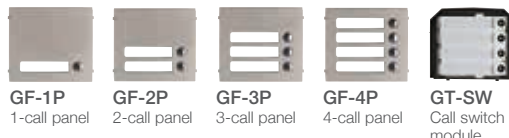

Audio Module



Digital name scrolling module



Front frame & back box



GT-4F
4-module front frame



GT-4B
4-module back box



GF-3F
3-module front frame



GF-3B
3-module back box

GF-2F
2-module front frame

GF-2B
2-module back box

Access control keypad module



Option



*1: GT-DB and GT-DB-VN cannot be used in the main buildings of a multi building systems.

Guard station



GT-MKB-N
Guard station

Power supply



PS-2420S
PS-2420UL
PS-2420BF
PS-2420

Tenant station



GT-1C7
Color display tenant station



GT-1M3
Color display tenant station



GT-2C
Color display tenant station



GT-2H
Color display sub tenant station



GT-HS
Handset
for GT-2C, GT-2H



GT-1A
Audio tenant station



GT-1D
Audio tenant station

Door station

Video door station for GT-2C



JK-DA
Wide / Zoom & PanTilt
video door station,
surface mount



JK-DV
Wide / Zoom & PanTilt
Vandal resistant video
door station, surface mount



JK-DVF
Wide / Zoom & PanTilt
Vandal resistant video
door station, flush mount

Door station for GT-2C



GT-D
Audio only door
station, surface mount

Video door station for GT-MKB-N



JO-DV
Vandal resistant
video door station,
surface mount



Option



GT-RY
External signaling
relay for entrance light,
external buzzer




W-DIN11
DIN mounting rail
for GT-BC, GT-VBC, GT-4Z



AC-10S
Access control
keypad,
surface mount



AC-10F
Access control
keypad,
flush mount



AE7090220B AE7090220G
AE7090210B AE7090210G
AIPHONE approved product wire

Control units

Control units



GT-BC
Bus control unit



GT-VBC
Video bus control unit,
expander video control



GT-4Z
4-way video
junction unit



GT-1Z
Video 1-zone
divider

Expanded control units



GT-BCXB-N
Expanded bus control unit



GT-VBX
Expanded video bus control unit

Multi-building control unit



GT-MCX
Multi-building control unit

Lift control adaptor




GTW-LC
Lift control adaptor


Unit Dimensions (mm)

Entrance station


GT-DMB-N (with GF-3B)




Audio / Video + Name scroll
(with GT-4B)




4-call (with GF-3B)




Audio / Video + Name scroll (with GF-2Bx2)




GT-VP




GT-VB




GF-4P




GT-SW




GT-NSP-L




GT-NSB




GT-DBP




GT-DB / GT-DB-VN




GF-10KP




GT-10K




GT-AC




GT-4F



GT-4B



GT-104H

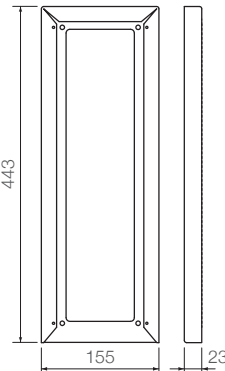

GT-104HB





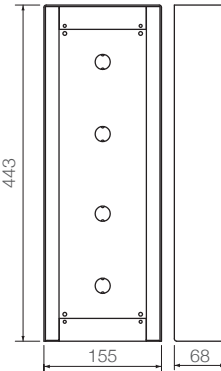


Image view area

WIDE

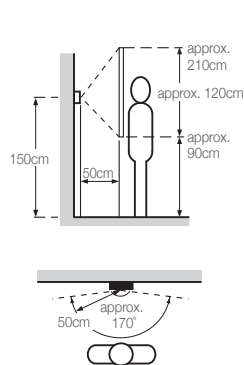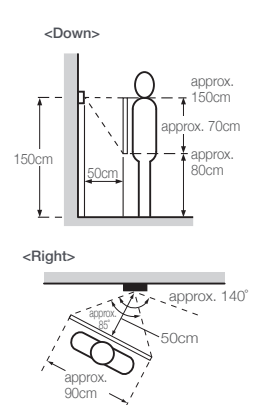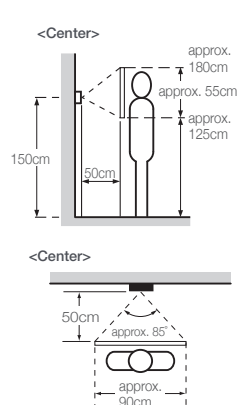


ZOOM & PanTilt

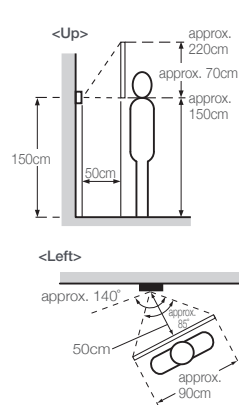


Guard station

GT-MKB-N



Power supply

PS-2420S, PS-2420UL,
PS-2420BF, PS-2420



Type of plug


PS-2420S PS-2420UL PS-2420BF




*AC cord & plug is not included with PS-2420.

Door station


JK-DA




JK-DV




JK-DVF



GT-D




JO-DV




Tenant station


GT-1C7




GT-1M3




GT-2C, GT-2H




GT-HS



GT-1A




GT-1D




Control units


GT-BC, GT-VBC, GT-4Z




GT-1Z




GT-BCXB-N




GT-VBX



GT-MCX



GTW-LC




Lift control adaptor GTW-LC


Installing a lift control adaptor gives the option to control lifts from the tenant station.



GT-1C7



Entrance station



Lift

*GT-BCXB-N is required to use GTW-LC.

*GTW-LC can be used only in the tenant buildings of a multi building system.

Hands-Free Color Video Multi-Tenant Building System with Zoom & PanTilt

Number of system components according to system type

Number of necessary control units at maximum tenant station and common equipment capacity.

	Building / Section type	System type	VIDEO / AUDIO	Max. Tenant station	Max. Entrance stations		Max. Guard station	
					 GT-DMB-N	 Module type	 GT-MKB-N	
Single building system (Max. 500 units)	Tenant building	Standard	VIDEO	48 *1	5		2	
			AUDIO	100 *2	5		2	
		Expanded	VIDEO	500 *1	16		4	
			AUDIO	500	16		4	
Multi building system (Max. 5,000 units)	Tenant building (Max. 24 buildings)	Standard	VIDEO	48 *1	4		1	
			AUDIO	100	4		1	
		Expanded	VIDEO	500 *1	15		3	
			AUDIO	500	15		3	
	Main building (Max. 8 buildings)	Standard	VIDEO	×	4	×	1	
			AUDIO	×	4	×	1	
		Expanded	VIDEO	×	15	×	3	
			AUDIO	×	15	×	3	

*Number of stations, units and power supply are per building.

Examples of multi-building system configurations

	Building / Section type	System type	VIDEO / AUDIO	Tenant station*1	Entrance stations		Guard station	
					GT-DMB-N	Module type	GT-MKB-N	
Multi building development (P10)	4 Tenant buildings	A:Standard	VIDEO	40	1	—	1	
		B:Expanded	VIDEO	400	1	—	1	
		C:Expanded	VIDEO	350	1	—	1	
		D:Expanded	VIDEO	270	1	—	1	
	2 Main buildings	1:Expanded	VIDEO	—	1	—	3	
		2:Expanded	VIDEO	—	1	—	3	
Total				1060	6	0	10	
Large scale residential building (P12)	3 Tenant sections	A:Expanded	VIDEO	400	—	—	—	
		B:Expanded	VIDEO	400	—	—	—	
		C:Expanded	VIDEO	300	—	—	—	
	1 Main sections	Expanded	VIDEO	—	3	—	3	
Total				1100	3	0	3	
Gated community / Villa (P14)	3 Tenant buildings / sections	A:Standard	VIDEO	30	—	—	—	
		B:Expanded	VIDEO	400	1	—	1	
		C:Standard	VIDEO	30	—	—	—	
	1 Main sections	Standard	VIDEO	—	—	—	1	
Total				460	1	0	2	

Bus control units		Expanded bus control units		Multi building control unit	Power supply	Lift control adaptor
						
GT-BC	GT-VBC	GT-BCXB-N	GT-VBX	GT-MCX	PS-2420	GTW-LC
1	1 *3	—	—	—	8	×
1	—	—	—	—	8	×
6	6 *3	1	1	—	27	○
6	—	1	—	—	27	○
1	1	—	—	1	7	×
1	—	—	—	1	7	×
6	6	1	1	1	26	○
6	—	1	—	1	26	○
1	1	—	—	1	7	×
1	—	—	—	1	7	×
2	2	1	1	1	22	×
2	—	1	—	1	22	×

*1: Please use a necessary number of GT-4Z / GT-1Z according to system design needs.

*2: Up to 100 GT-1D audio tenant stations can be connected when configuring a standard audio only system.

*3: The number of necessary units varies according to system size.

*Please follow installation manual when designing your system.

Bus control units		Expanded bus control units		Multi building control unit	Power supply
GT-BC	GT-VBC	GT-BCXB-N	GT-VBX	GT-MCX	PS-2420
1	1	0	0	1	4
5	6	1	1	1	9
5	6	1	1	1	9
4	5	1	1	1	8
2	2	1	1	1	7
2	2	1	1	1	7
19	22	5	5	6	44
5	5	1	1	1	7
5	5	1	1	1	7
4	4	1	1	1	6
2	2	1	1	1	8
16	16	4	4	4	28
1	1	0	0	1	2
5	6	1	1	1	9
1	1	0	0	1	2
1	1	0	0	1	3
8	9	1	1	4	16

*1: Please use a necessary number of GT-4Z / GT-1Z according to system design needs.

*Please follow installation manual when designing your system.

Distributed by :

AIPHONE®
Providing Peace of Mind

<http://www.aiphone.net/>

Deming Prize



Deming Medal



JQA-0291
Corresponding product:
Standard product
Order product



JQA-EM0453
HEADQUARTERS
TOYOTA FACTORY
TAIHOH SITE
DEVELOPMENT CENTER

GT(E)1701A

All rights reserved. All statements valid at time of printing. The design and specifications are subject to change without notice for improvement.

Printed in Japan (E)
QB59022AWZ