

The H10 series of angle contacts are all 4 conductor (2x tamper wire, 2x alarm wire), with variants as per the below table:

PART CODE	FEATURE
H10A	4 wire, armour sleeving
H10C	4 core (no armour)
H10CB	Rubber jacketed cable
H10CBA	Armour sleeving & rubber jacketed cable

NOTE:

R in part code signifies a right handed variant.




May also be suffixed with fly lead length
 (e.g. – H10AR2M = right handed 2 metre variant).

Operation:

The contact will operate with a gap of approximately 50mm. This distance will vary near magnetic surfaces (eg: steel) – use spacer **SPA-H10** if you encounter an unusually short operating gap.


Installation:

Fix the units to the mounting surfaces using the holes provided. The contact & magnet can be mounted horizontally or vertically, but ensure that they align correctly on the plane of operation. Improper alignment will affect the operation.



Wiring colours vary between the 4 core and 4 wire versions of the contact:

4 CORE

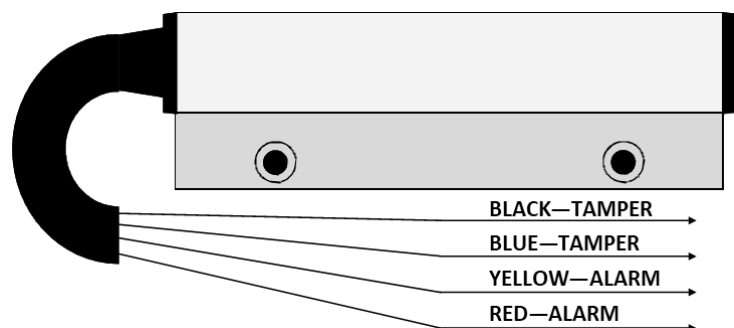

4 WIRE

