




IPSWP06N02A

4 PORT SWITCH POE + 2 SFP DIN MOUNTING

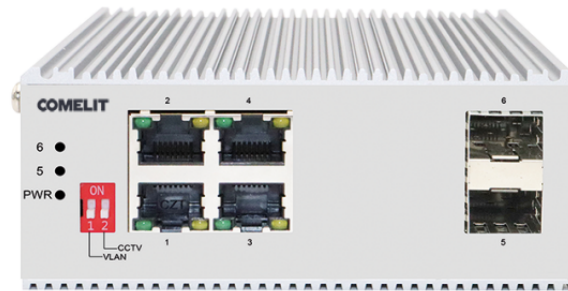

Network switch with 4 PoE ports + 2 gigabit SFP. DIN rail mounting Recommended power supply ART. PS4825A NOTE: compatible with the ViP system

AWARDS





IPSWP06N02A

4 PORT SWITCH POE + 2 SFP DIN MOUNTING

MAIN FEATURES

LAN ports	4 (10/100/1000 Mbit/s, auto MDI/MDI-X)
Standard IEEE802.3	IEEE802.3u/ab/z, IEEE802.3x (full-duplex)/back pressure (half-duplex)
LAN PoE ports	4 (10/100/1000 Mbit/s), 48 VDC (32W max), standard IEEE802.3af/at
SFP ports	2 (10/100/1000 Mbit/s)
Transfer method	Store and forward
Exchange capacity (Gb/s) (Gb/s)	12
MAC address	4K, auto-learning, auto-update
Frame Filtering and Forward Rate	8.9 Mpps max
Jumbo frame 9K management	Yes

GENERAL DATA

Max absorption (W)	65
Supply voltage	48VDC
Height (mm)	54
Width (mm)	165
Depth (mm)	147
Type of finishing materials	Metallic
Product color	Black
Operating temperature (°C)	-40 ÷ 75
Operating humidity (RH max) (%)	25 ÷ 90

CONNECTIVITY

RJ45 ports (n°)	4
-----------------	---



IPSWP06N02A

4 PORT SWITCH POE + 2 SFP DIN MOUNTING

ACCESSORIES



PS4825A POWER SUPPLY UNIT 48V 2.5A DIN RAIL

Power supply unit with DIN rail mounting. Input 90-264 VAC, output 48 VDC/2.5A (120 W).