
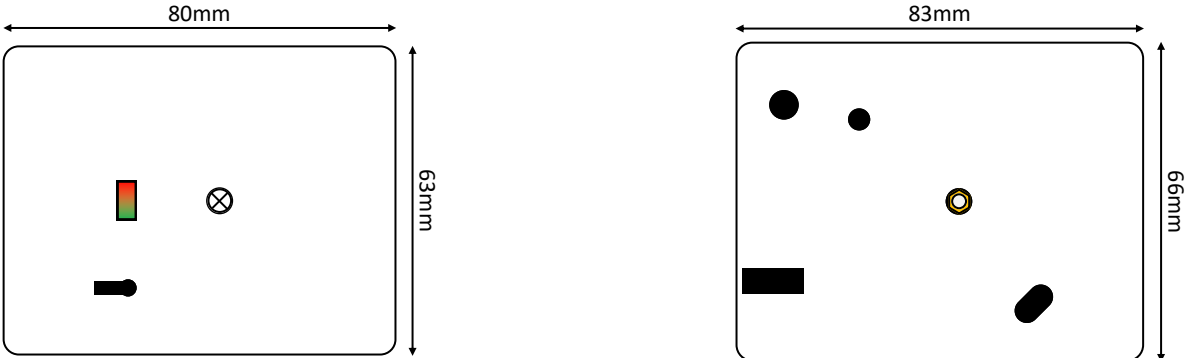
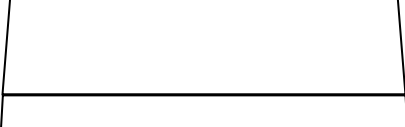


TOP/ BOTTOM		DESCRIPTION Grade 1, Class II single end push panic button. Tampered. White. VARIANTS KP1S Steel fascia, black body. KP1B Brass fascia, black body. ACTIVATION Latching remains activated until manually reset. Leaf tamper triggered on lid removal. Reed switch triggered on button push. Reset key turn in keyhole to reset. INDICATION Flag type. Green = unpushed. Red = pushed. WIRING 2x free terminals. 2x tamper terminals. 2x alarm terminals. MATERIALS ABS housing. Rhodium Reed. TEMPERATURE RANGE -40 to +50 degrees Celsius. ELECTRICALLY RATED AS FOLLOWS 1-100V DC. 125V AC. 500mA max current.
ENDS		
SIDES		
PHOTO	 INTERNAL 	

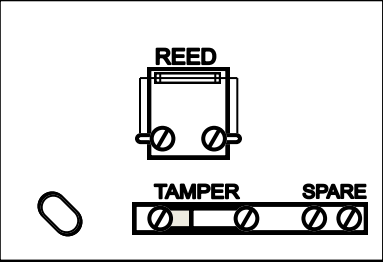

KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
 Cardiff UK CF24 5TH
 Tel: +44 (0) 2920 488 129
 Fax: +44(0) 2920 489 132

Drawing #: KP1
 Drawn: Gareth Carpenter
 Date: 01/07/2017
 Revision: 1

All dimensions in mm
 Do not scale



© Knight Fire & Security Products Ltd
 All cases of infringement will be pursued.