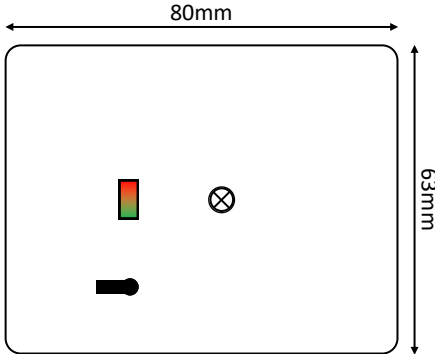
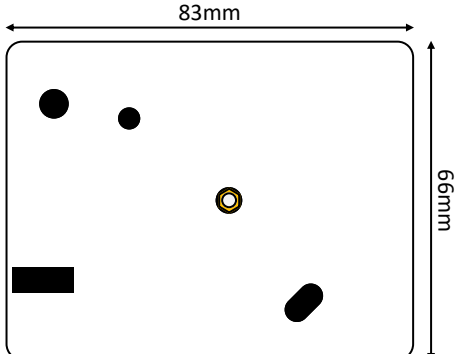
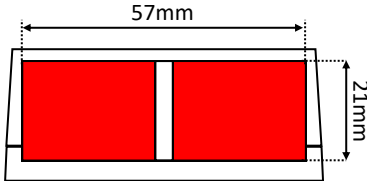
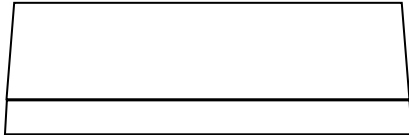
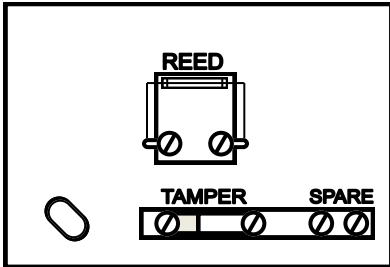


TOP/ BOTTOM					DESCRIPTION Grade 2, Class II double end push panic button. Tampered. White. VARIANTS KP4S Steel fascia, black body. KP4B Brass fascia, black body. ACTIVATION Latching remains activated until manually reset. Leaf tamper triggered on lid removal. Reed switch triggered on button push. Reset key turn in keyhole to reset. INDICATION Flag type. Green = unpushed. Red = pushed. WIRING 2x free terminals. 2x tamper terminals. 2x alarm terminals. MATERIALS ABS housing. Rhodium Reed. TEMPERATURE RANGE -40 to +50 degrees Celsius. ELECTRICALLY RATED AS FOLLOWS 1-100V DC. 125V AC. 500mA max current.	
	ENDS					
						
	PHOTO			INTERNAL 		

 KNIGHT FIRE & SECURITY	Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH Tel: +44 (0) 2920 488 129 Fax: +44(0) 2920 489 132	Drawing #: KP4 Drawn: Gareth Carpenter Date: 01/07/2023 Revision: 2	All dimensions in mm Do not scale 
	© Knight Fire & Security Products Ltd All cases of infringement will be pursued.		