



MATT BLACK DOUBLE STANDARD MAGNETIC LOCK



RALock

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to
BS EN1634-1:2014 & BS476:Part22:1987
(30, 60, 90 & 120 min timber door-sets)



MBK-ML1200-D-M

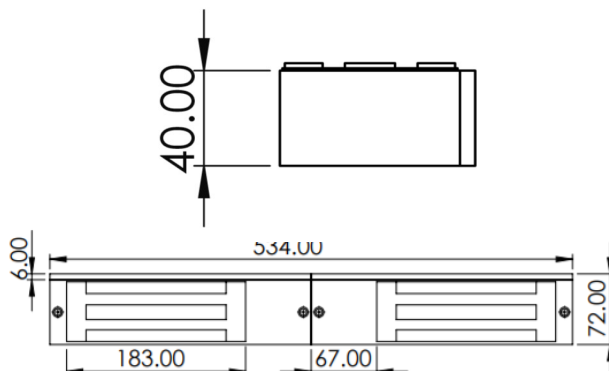

ML1200-M

MBK-ML1200-D-M

SPECIFICATION

MBK-ML1200-D-M

- Aluminium housing
- 12/24 VDC @600/300mA x2
- 545kg (1200lb) holding force x2
- Built in surge protection
- Surface mount
- Fail safe operation (power to lock)
- +/- 15% voltage tolerance
- -10° to +50° operating temperature
- Push off release pin on armature
- Monitored
- Voltage free relay contacts

FEATURES

MBK-ML1200-D-M

- Fire rated (30, 60, 80 & 120 min timber door set)
- Standard magnet
- Clean and compact design
- No residual magnetism
- Status LED indication on ML1200-D-M (Red to Green)

Suitable Brackets/Housings:

- BK1200-D-ZL (Double ZL bracket)
- BK1200-D-L (Double L bracket)
- AH1200 (Armature housing) x2
- BK1200-D-FL/AB (Architectural Bracket)
- ABP1200 (Armature Back Plate) x2

OTHER PRODUCTS

EBCBWC02/DR



EXTR02



ML600



DU-CB/PTE



DIMENSIONS

MBK-ML1200-D-M

- 530x73x40 (mm)
- 185x60x15 (mm) Armature x2
- 8.54kg Boxed
- 5.58kg Unboxed

CONTENTS

MBK-ML1200-D-M

- Standard double magnet
- Armature plate x2
- 1200GB fixing kit x2
- Instructions
- Armature fixing template



Manufactured by a BSIA Member