


MAXPRO INTRUSION CONTROL PANELS

Cloud-Hosted Integrated Intrusion
and Access Control

The Honeywell MAXPRO®
Intrusion Series control
panels deliver a fully
integrated intrusion and
access control system

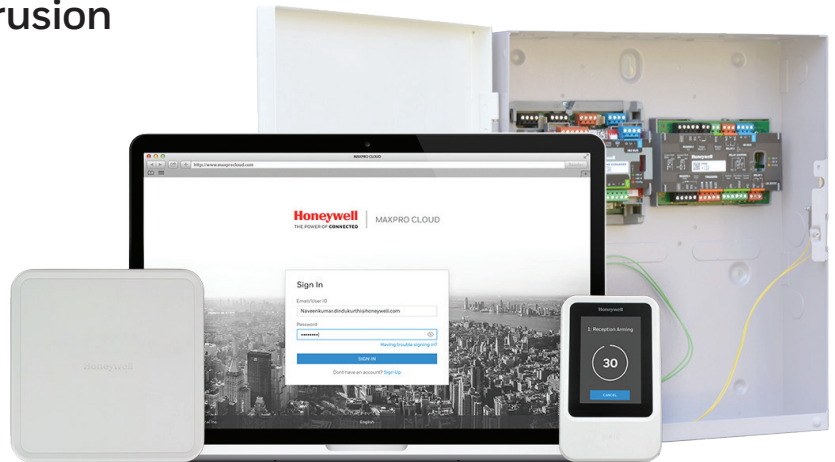

MAXPRO® Intrusion (MPI) is part of the MAXPRO® family of products, and utilises MAXPRO® Cloud for configuration, maintenance, and management.

MAXPRO® Cloud is a fully integrated access, video, and intrusion Security-as-a-Service platform. Ideal for small to medium businesses, MAXPRO® Cloud makes single or multi-site building security simple and scalable. Users can manage their security system from anywhere at any time via any standard web browser or our innovative award-winning app.

Remote configuration and management of sites, devices, schedules, and users reduces operational costs and streamlines efficiencies across multi-site installations.

Our cloud-ready range of control panels makes installation easy with plug and play connectivity, auto addressing of devices, and cloud-based configuration, reducing your creation costs and installation time.

FEATURES AND BENEFITS

- Cloud-hosted, scalable, expandable, efficient, no servers or software required
- Secure, HTTPS login and 256-bit encryption, high availability data centres
- Integrated intrusion, access control, and video with plug and play device connection
- Pre-configure accounts, sites, schedules, and people, saving installation time at site
- Configure and manage sites, devices, schedules, permission groups, and users across multiple sites from the cloud
- Designed for small to medium, single or multi-site businesses
- Panel firmware and peripheral updates can be pushed from the cloud without having to roll a truck
- Easily grow and scale with your customer's needs

It is necessary to register for an account with MAXPRO® Cloud before using the MPI control panels.
Visit www.maxprocloud.com for details.

Honeywell


MAXPRO INTRUSION CONTROL PANELS

SYSTEM BENEFITS

- Multi-site deployment made easy with cloud-based configuration and management:
 - Access from anywhere via standard web browser
 - Remote configuration and firmware updates for MPI panel and peripherals reduce truck rolls
 - Map based configuration and management
 - Customizable dashboard and business insights
 - Automated and scheduled reporting
- Single, multi-site user database for access/ intrusion and multi-site Permission Groups:
 - Manage user credentials across large scale deployments
 - Integrate access doors and intrusion areas
 - Multi-site management via app for iOS and Android™
- Easy to install and cost effective:
 - Modular and scalable
 - Free wiring topology (chain, star, or spur) over standard cable to reduce cabling costs and time
 - Simple plug-and play IP connectivity
- Automatic addressing of peripherals: unique device IDs embedded within each device for hands-free enrolment on the system
- Simple user interface and colour-coded terminal blocks
- Flexible options for zone supervision types and end-of-line resistor values
- Supports low-power V-Plex bus devices
- Compatible with most legacy cable systems
- Direct alarm reporting compliant with SIA DC09
- Customer remote monitoring of multiple sites (secondary to Central Station monitoring):
 - Web and mobile apps available
 - Push notifications
- Easy video integration: associate cameras to intrusion zones and doors
- Integration with MAXPRO® Video cameras, MAXPRO® ACCESS and NetAXS through MAXPRO® Cloud
- Support for Domonial RF sensors with manual and auto enrollment of multiple sensors
- NTP URL configuration support through keypad
- Seismic test with SC115 simulator for SC100 & SC105


INTUITIVE USER INTERFACE

- Customizable dashboards
- Google Maps
- Dynamic floor plans
- Live control
- Multi-site intrusion, access, and video
- Integrated multi-site viewer
- Multi-site user management (access and intrusion)
- Live alarms and event monitoring

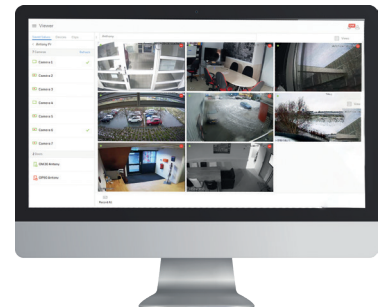


POWERFUL MOBILE APP

- Live view and management of video and access control
- Door control and recorded video playback
- Multi-location management



MAXPRO INTRUSION CONTROL PANELS

ARCHITECTURAL OVERVIEW

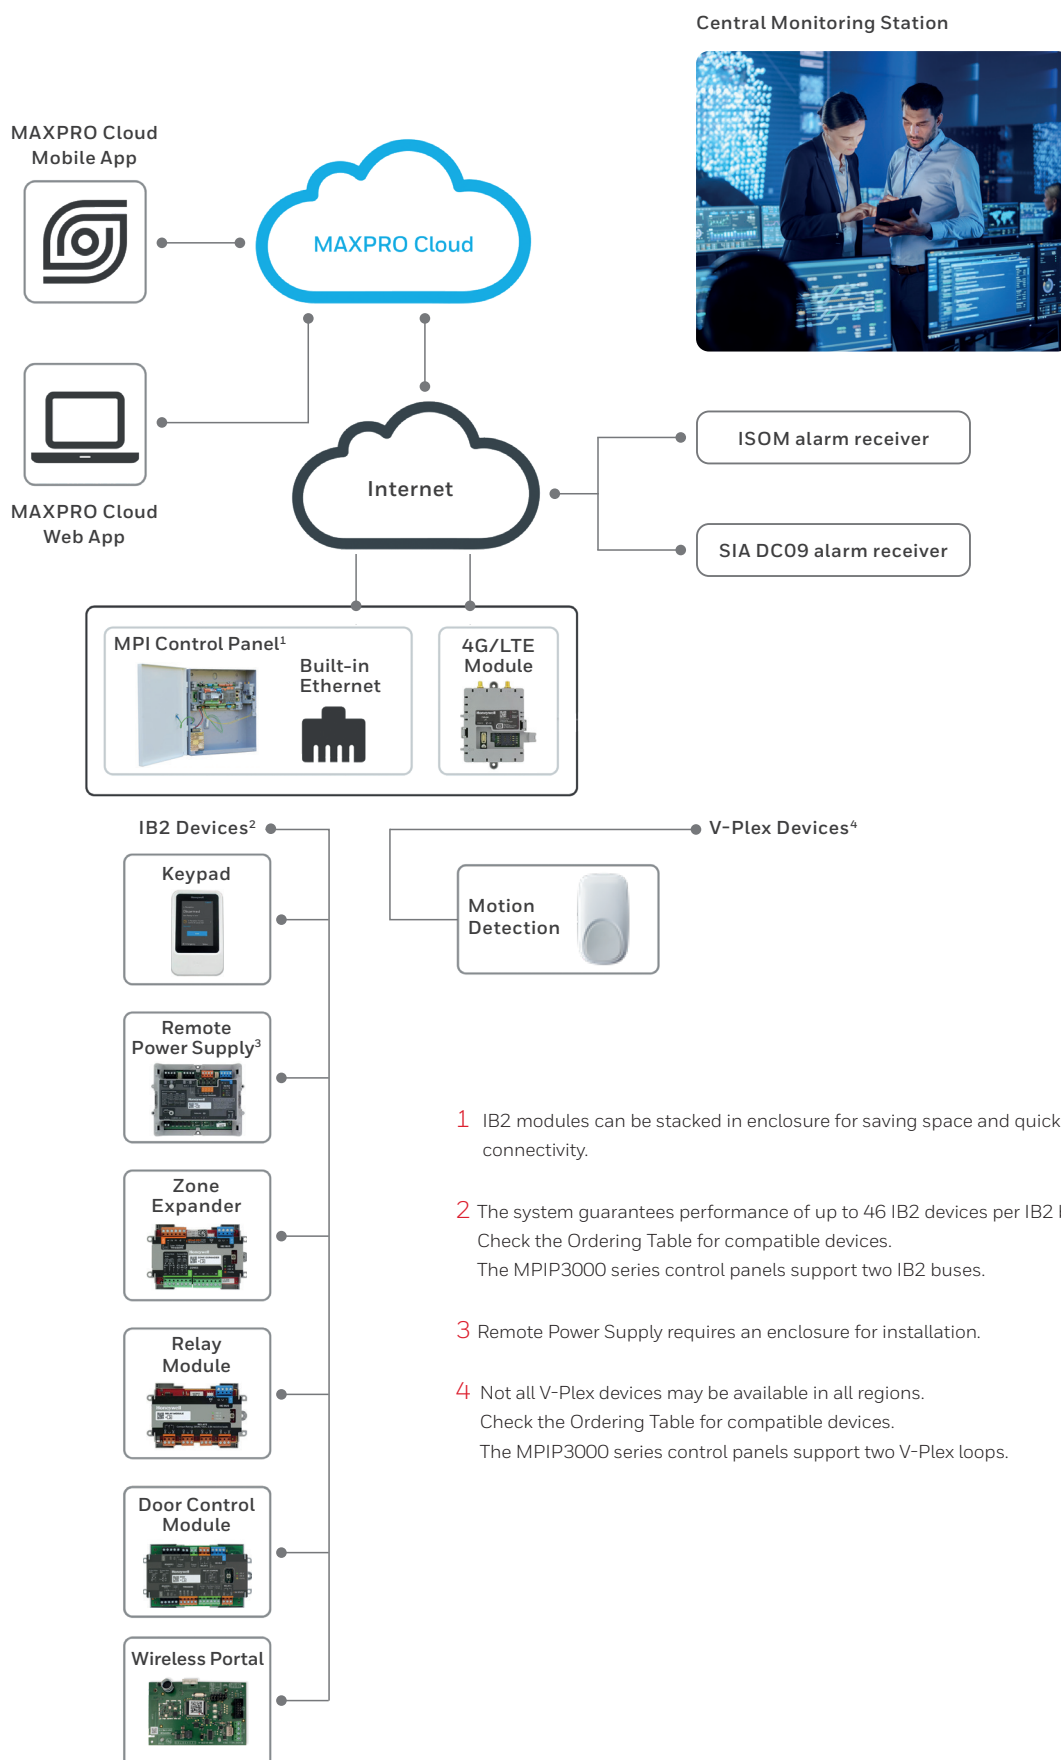

MAXPRO INTRUSION CONTROL PANELS

SPECIFICATIONS

FEATURE	MPIP2000E	MPIP2100E	MPIP3000E	MPIP3000E ¹
INPUTS (ZONES)				
MAX. INPUTS	60	150	300	600
ON-BOARD INPUTS (TOTAL) ²	10	10	10	10
RF ZONES	48	96	192	192
ON-BOARD INPUTS SUITED FOR 2-WIRE SMOKE	2	2	2	2
OUTPUTS (ZONES)				
MAX. OUTPUTS	60	100	200	300
ON-BOARD TRIGGER OUTPUTS	4	4	4	4
ON-BOARD RELAY OUTPUTS	1	1	2	2
AUXILIARY POWER OUTPUTS (12 VDC)	1	1	2	2
MONITORED SIREN OUTPUT	No	No	No	No
SIREN POWER OUTPUT (12 VDC)	1	1	1	1
LOUDSPEAKER DRIVER FOR INTERNAL SIREN	1	1	1	1
AREAS AND DOORS				
AREAS	10	30	60	120
DOORS	10	30	60	60
USERS				
USERS	500	2,000	5,000	10,000
PERMISSION GROUPS	30	50	100	300
EVENTS LOG				
INTRUSION	1,000	3,000	5,000	10,000
ACCESS	6,000	10,000	10,000	10,000
PROGRAMMING				
SCHEDULES	30	50	100	200
HOLIDAYS (PER YEAR)	40	40	40	40
CONTROLLER RULES	30	50	100	200
BUS NETWORK				
ON-BOARD IB2 DATA BUS LINES	1	1	2	2
ON-BOARD V-PLEX DEVICE BUS LINES	1	1	2	2
POWER SUPPLY				
MAX. CONSTANT CURRENT	3.0 A	3.0 A	3.0 A	3.0 A
BATTERY CHARGING CAPACITY ³	36 Ah	36 Ah	36 Ah	36 Ah
COMMUNICATION PATHS				
IP/ETHERNET	1 on board	1 on board	1 on board	1 on board
RADIO COMMUNICATION (4G/LTE)	Optional	Optional	Optional	Optional
CENTRAL STATION SIGNALLING PROTOCOLS				
CONTACT ID	Yes, via Honeywell ISOM protocol compatible alarm receiver			
SIA	Yes, via Honeywell ISOM and/or SIA DC09 compatible alarm receiver			

¹ MPIP3100E model coming soon.

² The total amount of onboard inputs includes the normal inputs and the inputs that are suitable for 2-wire smoke devices. The inputs that are suitable for 2-wire smoke devices can also be used as normal inputs.

³ For 36 Ah battery capacity, you need to install 2 x 18 Ah batteries. You will need a second tamper-protected cabinet to house the second battery.

MAXPRO INTRUSION CONTROL PANELS

TECHNICAL SPECIFICATIONS

PANEL SPECIFICATIONS		MPIP2000E, MPIP2100E, MPIP3000E, MPIP3100E	
BOARD POWER			
INPUT VOLTAGE		14 VDC nominal (13.6–14.5 VDC)	
CURRENT CONSUMPTION, TYPICAL ¹		MPIP2000 series: 230 mA MPIP3000 series: 270 mA	
CURRENT CONSUMPTION, MAX ²		MPIP2000 series: 290 mA MPIP3000 series: 400 mA	
BACKUP BATTERY		Up to 2 x 12 VDC sealed lead acid (SLA) battery	
RECOMMENDED BATTERIES		Yuasa NP7–12FR; up to 2; Yuasa NP17–12IFR x 1; Yuasa NP18–12FR x 1	
BATTERY PROTECTION		System has protection for charging and reverse polarity connection	
BATTERY LOW VOLTAGE ³		11.2 VDC	
BATTERY DEEP DISCHARGE PROTECTION ⁴		10.5 VDC	
MINIMUM SUPPORTED BATTERY VOLTAGE ⁵		9.5 VDC	
ZONES (INPUTS) (X 10)			
VOLTAGE		3.3 VDC	
RESISTANCE TOLERANCE		1% max	
AUXILIARY OUTPUTS			
POWER RATING		13.8 VDC nominal (10.2–14.4 VDC)	
AUX1 (AUX1, IB2 BUS 1)		MPIP2000E series: 1.5 A max. / MPIP3000E series: 1.1 A max	
AUX2 (IB2 BUS 2, MPIP3000 SERIES ONLY)		1.1 A max	
AUX3 (EXTERNAL SIREN AND 4G/LTE MODULE)		1.1 A max	
TOTAL CURRENT AVAILABLE FOR AUX OUTPUTS		The combined load from all auxiliary outputs depends on panel model and battery capacity, and must not exceed the maximums as given in the Current Ratings table (see next page)	
AUXILIARY LOW POWER OUTPUT FAULT		10.0 VDC	
AUXILIARY HIGH POWER OUTPUT FAULT		14.5 VDC	
CIRCUIT PROTECTION		All circuits are power limited using PTCs	
LOW-VOLTAGE TRIGGER OUTPUTS (X 4)			
TRIGGER OUTPUT VOLTAGE		13.8 VDC (0 VDC with switched) In the event of a failure, overvoltage protection will operate at 16.5 VDC	
MAX. CURRENT (PER OUTPUT)		300 mA	
RELAY OUTPUTS			
RELAY 1		Voltage free; contact rating 28 VDC; 2.8 A; resistive loads	
RELAY 2 (MPIP3XXX PANELS ONLY)			
COMMUNICATION			
ON-BOARD ETHERNET		EN 50136-1 SP5	
WITH OPTIONAL LTE/4G MODULE		EN 50136-1 DP4	
ENCRYPTION		TLS V1.2BC	
COMMUNICATION METHOD		Pass-through (Ref. EN 50136-2 Section 6.1.3)	
IP ALARM RECEIVER		Honeywell ISOM and/or SIA DC09 compatible alarm receiver	
ENVIRONMENTAL			
OPERATING TEMPERATURE		–10 to +50 °C; Indoor use only	
HUMIDITY		Max. 93% RH non-condensing	
PHYSICAL			
DIMENSIONS (W X D X H)		PCA: 28 cm x 14.5 cm x 4.2 cm (including mounting bracket) As shipped: 35.6 cm x 19.5 cm x 7.8 cm	
WEIGHT		PCA (incl. mounting bracket): MPIP2000 series: 502g; MPIP3000 series: 535g As shipped: MPIP2000 series: 833g; MPIP3000 series: 865g	

1 Typical current consumption is for the panel circuit board only and does not include any current drawn from the auxiliary outputs.

2 Maximum current consumption is for the panel circuit board only and does not include any current drawn from the auxiliary outputs.

3 The voltage at which the system will issue the low battery warning.

4 The voltage at which the system will disconnect the backup batteries from the circuit.

5 The voltage at which the system will treat the battery as if it is not there and will not recharge it.

MAXPRO INTRUSION CONTROL PANELS

TECHNICAL SPECIFICATIONS

CURRENT RATINGS				
BATTERY CAPACITY	7 AH	14 AH	17/18 AH	36 AH ¹
EN GRADE 2; RECHARGE 72 H	300 mA	900 mA	1150 mA	2300 mA
EN GRADE 3; RECHARGE 24 H ²	–	210 mA	350 mA	950 mA
EN GRADE 3 WITH SPSS; RECHARGE 24 H	1450 mA	2200 mA	2100 mA	1330 mA
PD 6662 GRADE 3; RECHARGE 24 H	320 mA	900 mA	1150 mA	1230 mA

1 For 36 Ah battery capacity, you need to install 2 x 18 Ah batteries. You will need a second tamper-protected cabinet to house the second battery.

MPI CABINET MPIBX35	
TYPE A POWER SUPPLY AS PER EN 50131-6 WHEN USED WITH MPI CONTROL PANEL (MPIPXXXX) OR MPI REMOTE POWER SUPPLY (MPIPSU35).	
ELECTRICAL	
INPUT VOLTAGE (AC POWER SUPPLY)	110–230 VAC; 50–60 Hz
DC OUTPUT	13.8 VDC ±1%
RIPPLE (MAX.)	120 mVp-p
PHYSICAL	
DIMENSIONS	41 cm x 36 cm x 11 cm As shipped: 43.5 cm x 37.5 cm x 11.5 cm
WEIGHT	5.1 kg approx. (includes AC power adapter) As shipped: 5.4 kg approx
OPERATING TEMPERATURE	–10 to +50°C Indoor use only
HUMIDITY	
INGRESS AND IMPACT PROTECTION	EN 60529:1992+A2:2013: IP42 EN 62262:2002: IK06

MAXPRO INTRUSION CABLING				
FUNCTION	SIGNAL(S)	TYPE	MAX. LENGTH	INTERIOR / EXTERIOR
AC POWER	110/230 VAC	As per local laws and regulations		Interior
ZONE	Sensor contact input	Twisted pair or better (core min 0.182 mm ² / 24 AWG)	100 m (328 ft)	Interior
INTER UNIT WIRING	IB2 ²	• 4-core alarm cable (22/4 STR CM/CL2); 100 ohms/km max • CAT 5E UTP 24 AWG	3.65 km (12,000 ft)	Interior
	V-Plex	See the MAXPRO® Intrusion Installation and Setup Guide (800-23044-1)		Interior
ETHERNET	Ethernet	CAT5E shielded	100 m (328 ft)	Interior
AERIAL EXTENSION LEAD	4G LTE	50 ohm low-loss SMA M to F coaxial	Refer to cable manufacturer's recommendation	Interior
EXTERNAL SIREN SIREN	Power, trigger, tamper, and fault	As per manufacturer's recommendation	100 m (328 ft)	Interior

2 IB2 wiring: Use of other types of cables than those listed are at the installer's risk.

MAXPRO INTRUSION CONTROL PANELS

ORDERING TABLE

PART NO.	PRODUCT NAME
CONTROL PANELS	
MPIP2000E	MAXPRO® Intrusion P2000E Controller (needs cabinet)
MPIP2100E	MAXPRO® Intrusion P2100E Controller (needs cabinet)
MPIP3000E	MAXPRO® Intrusion P3000E Controller (needs cabinet)
MPIP3100E¹	MAXPRO® Intrusion P3100E Controller (needs cabinet)
PANEL KITS	
NF&A2P 3 SHIELDS CYBERSECURITY	
MPIP2000EBX	MAXPRO® Intrusion MPI2000E Controller with cabinet and PSU MPIBXM35
MPIP2100EBX	MAXPRO® Intrusion MPI2100E Controller with cabinet and PSU MPIBXM35
MPIP3000EBX	MAXPRO® Intrusion MPI3000E Controller with cabinet and PSU MPIBXM35
MPIP3100EBX	MAXPRO® Intrusion MPI3100E Controller with cabinet and PSU MPIBXM35 (available soon)
CABINETS	
MPIBXM35	MAXPRO® Intrusion enclosure and PSU; medium-size; 3.5 A
COMMUNICATION MODULE	
MPICLTEE	MAXPRO® Intrusion 4G/LTE module
IB2 BUS DEVICES	
EXPANSION POWER SUPPLY	
MPIPSU35	MAXPRO® Intrusion expansion PSU 3.5 A (needs cabinet)
MPIPSU35BX	MAXPRO® Intrusion expansion PSU 3.5 A with cabinet
I/O WIRED EXPANDERS	
MPIEIO84E	MAXPRO® Intrusion Zone Expander Module, 8 hardwired zones + 4 triggers
MPIEOP4	MAXPRO® Intrusion Relay Module, 4 relays
WIRELESS EXPANDER	
MPIWLTXAL	MAXPRO® Intrusion RF Portal, 24 RF zones
KEYPADS	
MPIKTSMF	MAXPRO® Intrusion Touchscreen Keypad Mifare
MPIKTSPRX	MAXPRO® Intrusion Touchscreen Keypad Proximity
MPIKW1	MAXPRO® Intrusion Keypad Wall Mounting Plate
ACCESS CONTROL MODULES	
MPIDC1	MAXPRO® Intrusion 1 Door Control Module (1 door, up to 2 readers)
V-PLEX DEVICES ²	
INTERIOR MOTION DETECTION	
DT8016AF4-SN / DT8016AF5-SN	DUAL TEC motion sensor with anti-mask
DT8016MF4-SN / DT8016MF5-SN	DUAL TEC motion sensor
DT8320AF4-SN / DT8320AF5-SN	DUAL TEC ceiling mount motion sensor with mirror optics and anti-mask
DT8320F4-SN / DT8320F5-SN	DUAL TEC ceiling mount motion sensor with mirror optics
IS3016A-SN	Passive Infrared motion sensor with anti-mask
IS3016M-SN	Passive Infrared motion sensor
MAXPRO CLOUD	
MPC-I003	MPC monthly fee for MPI 2000 and MPI 3000 Intrusion Panels management (per panel)
MPC-IDC0	MPC monthly fee for MPI Door Control Intrusion Panels management (per door)

1 MPIP3100E model coming soon.

2 Not all listed V-Plex devices may be available in all regions. Check the specifications and security grading in the device's datasheet. More V-Plex devices may be available soon. Please contact your local Honeywell Intrusion Sales Representative for the latest updates on availability in your region.

MAXPRO INTRUSION CONTROL PANELS

MPI CONTROL PANEL

This product has been tested for compliance by BRE Global Ltd. UK to:
EN 50131-3:2009 Grade 3 Environmental Class II.

EN 50131-6:2017 Type A.

EN 50136-2:2013 Category SP5 (DP4 when used with MPICLTEE).

EN 50131-10:2014 Type Z when used in conjunction with MAXPRO® Intrusion enclosure MPIBXM35.

NF&A2P: NF324-H58 / EN 50131-3 / RTC 50131-3 / EN 50131-6 /
RTC 50131-6 / EN 50131-10 / RTC 50131-10 / EN 50136-2 and RTC Cyber

INCERT Certification Grade 3

SBSC Certification SSF 1014 Alarm Class 3 and SSF 114 Class 2.

MPI CABINET

This product is suitable for use in systems designed
to comply with EN 50131-3:2009.

This product has been tested for compliance by BRE Global Ltd. UK to:
EN 50131-3:2009 Grade 3 Environmental Class II when used with
certified MAXPRO® Intrusion controllers or peripherals.

ECOSYSTEM INCLUDES:

- MAXPRO® Cloud
- Control panel
- Peripherals
- Sensors
- Internet
- ISOM / SIA DC09 compatible alarm receiver
- Central monitoring station

For More Information

buildings.honeywell.com/security

Honeywell Commercial Security

Building 5 Carlton Park
King Edward Avenue
Narborough, Leicester
LE19 0AL

United Kingdom

Tel: +44 (0) 1163 500714

www.honeywell.com

HCS-MPIP-01-EN(0724)DS-C
© 2024 Honeywell International Inc.

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell