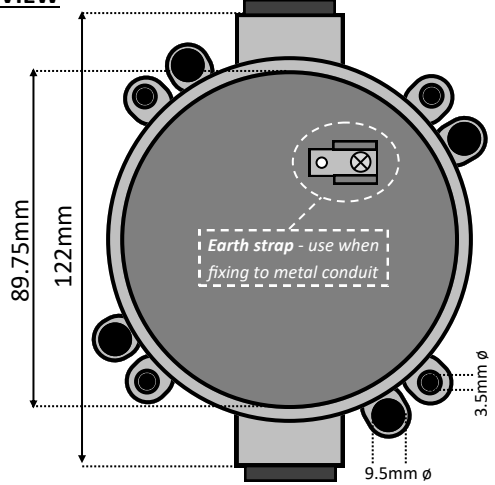
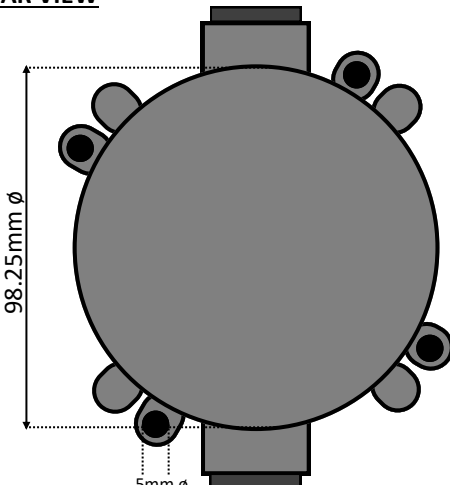
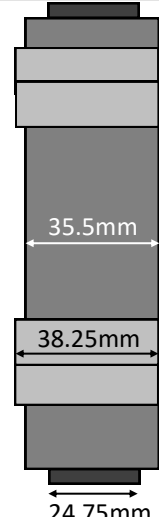

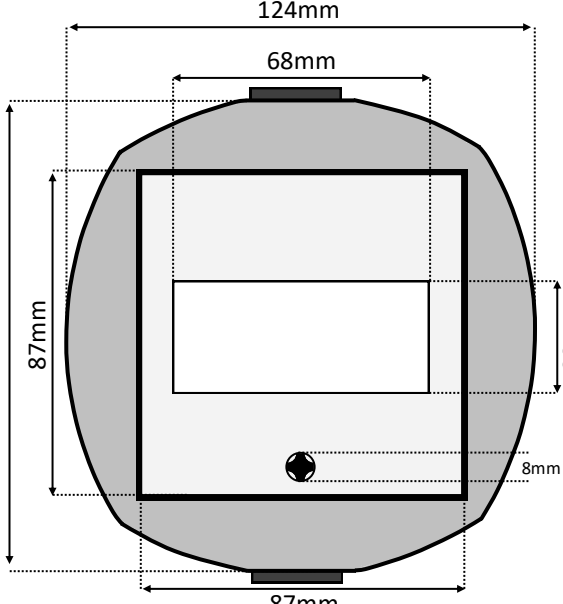
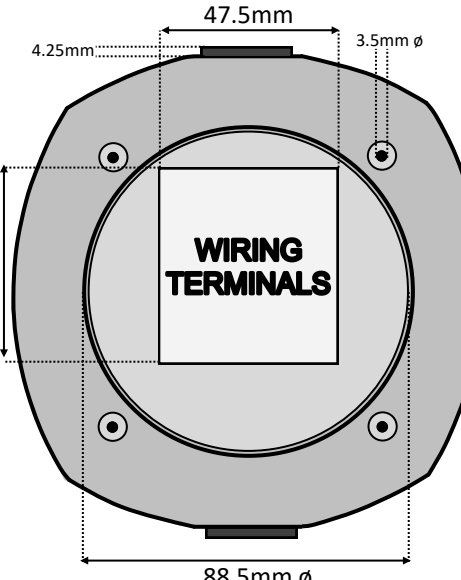
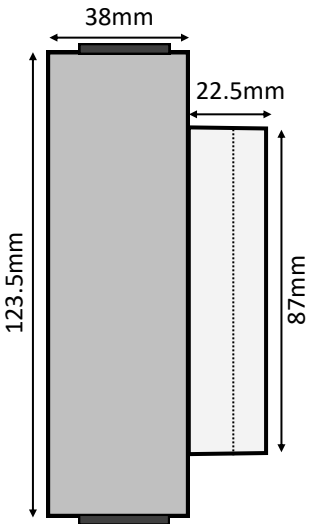


BACK BOX	FRONT VIEW 	REAR VIEW 	SIDE VIEW 	DESCRIPTION Weatherproof Surface call point POLES 3—Triple pole unit Common, N/O, N/C wiring on pole as below <i>Diagram shows call point in set, untriggered position</i>  ACTIVATION Microswitch/resettable plate Microswitch/"Like glass" insert Key provided WATERPROOFING Twin O ring sealed cable entry Waterproof activation microswitch Large O ring seal between back box & front LED None TEMPERATURE RANGE -40 to +85 degrees Celsius ELECTRICALLY RATED AS FOLLOWS Max 50 Volts DC 50 Volts DC/5A 12.5 Volts DC/5A 250 Volts AC/3A
CALL POINT FRONT				
 KNIGHT FIRE & SECURITY Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH Tel: +44 (0) 2920 488 129 Fax: +44(0) 2920 489 132		Drawing #: MX87 Drawn: Gareth Carpenter Date: 01/04/2017 Revision: 1		All dimensions in mm Do not scale  © Knight Fire & Security Products Ltd All cases of infringement will be pursued.

NOTES REGARDING PART CODES:

The MX87 can be produced to various specifications. Use the below table as a guide on how the part code will affect the end product:

EXAMPLES:

MX87TWGSC: Triple pole waterproof call point in green, resettable, with cover
MX87TWY: Triple pole waterproof call point in yellow, like glass insert, no cover

MX87	T	W	W/G/Y/B/R	S	C
	Triple pole	Waterproof	White	Resettable plate If omitted: Like glass insert	With cover If omitted: Without Cover
			Green		
			Yellow		
			Blue		
			Red		

**CALL POINT FRONT****CALL POINT REAR**

NOTE: TRIPLE POLE VARIANT SHOWN

**CALL POINT BACK BOX**

KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: +44 (0) 2920 488 129
Fax: +44(0) 2920 489 132

Drawing #: MX87
Drawn: Gareth Carpenter
Date: 01/04/2017
Revision: 1

All dimensions in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of infringement will be pursued.