


The P01 and P02 series of parts are key switches complete with tamper detection. On all units, the key can be removed in the on or off position and there is no momentary/spring mechanism. All units are supplied with 2 keys.

VARIANTS

CODE	DESCRIPTION	KEYS	CODE	DESCRIPTION	KEYS
P01	DPDT Pass key switch, silver	DIFFER	P01W	DPDT Pass key switch, white	DIFFER
P01S	DPDT Pass key switch, silver, security screws	DIFFER	P01WS	DPDT Pass key switch, white, security screws	DIFFER
P02	DPDT Pass key switch, silver	ALIKE	P02W	DPDT Pass key switch, white	ALIKE

DIAGRAM

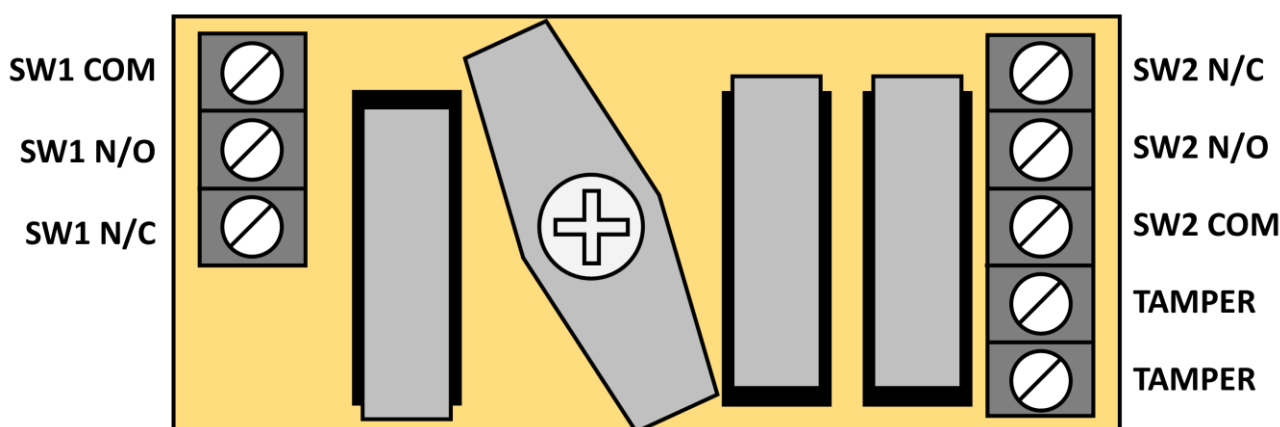

INSTALLATION

Remove the lid from the unit. For S variants, a suited tool is provided for fixing removal.

Thread any incoming wiring through the provided entry in the rear of the housing and fix the base to the mounting surface.

Wire as per requirements. Both changeover switches will operate when the key is turned. The tamper circuit is closed with the lid in place, opening as the lid is removed.

When wiring is complete, ensure the cam is seated correctly on the lock shaft and that the screw is tight.

Fit the lid to the base ensuring that no snagging occurs.

Screw the lid into place & test operation.

NOTES

Electrical rating: 0-100V DC, 500mA
 0-250V AC, 2A