


The P05 is a twin-LED pass keyswitch. The key can be removed in the on or off position and there is no momentary/spring mechanism. All units are supplied with 2 keys.

DIAGRAM

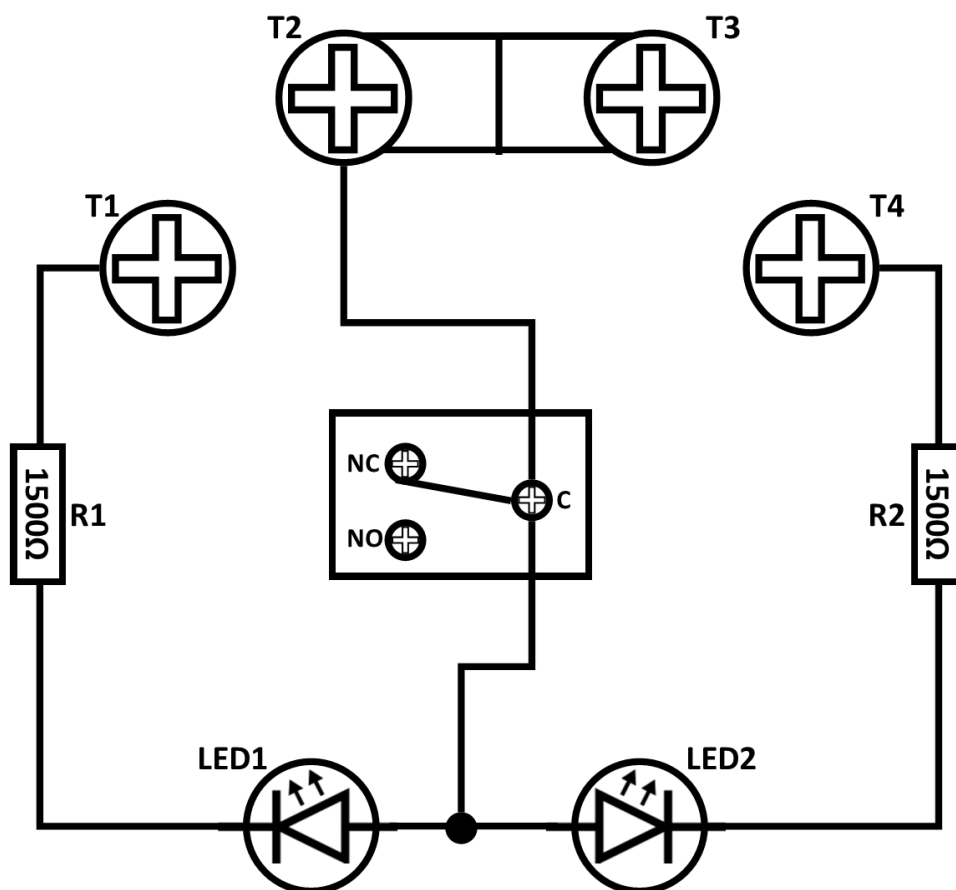

INSTALLATION

Remove the lid from the unit. Use care – there is wiring between the base/lid halves.

Remove one of the two rear knockouts & thread any incoming wiring through. Fix the base to the mounting surface.

Wire as per the application demands. T2 and T3 close together when the lid is screwed on.

When wiring is complete, ensure the cam is seated correctly on the lock shaft and that the screw is tight.

Fit the lid to the base ensuring that internal wiring is not pinched or trapped at the fixing points.

Screw the lid into place & test operation.

NOTES

Electrical input: 24V DC