




LID

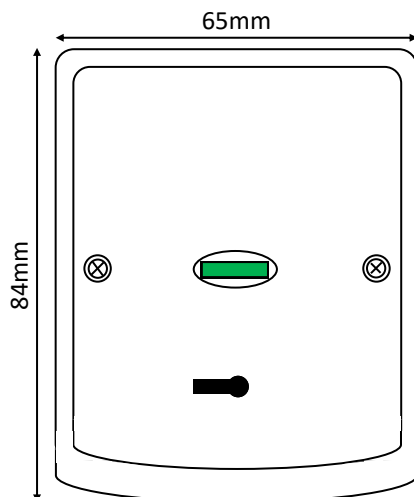


INTERNAL

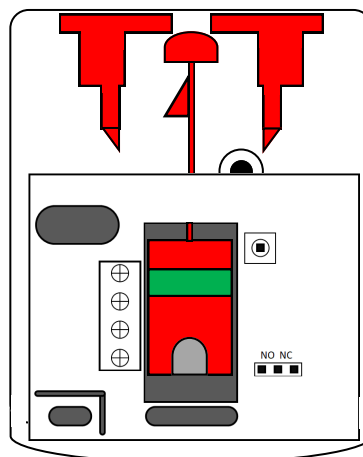

SIDE

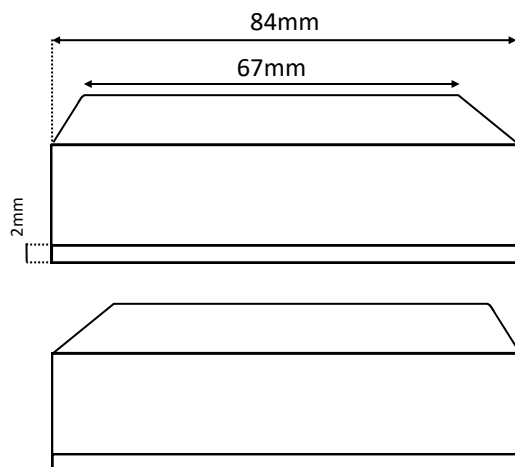

ENDS

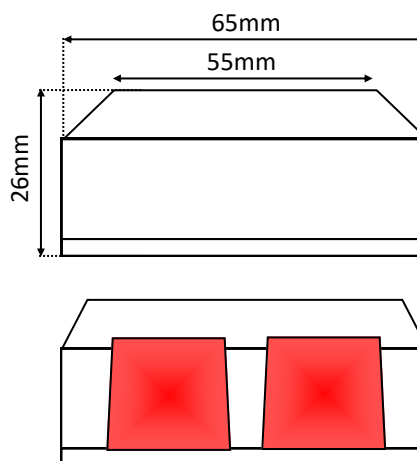

DESCRIPTION

Double End Push Panic Button, Non-Latching
Grade 3—Environmental Class II
N/O, N/C Selectable

VARIANTS

PA2EW— White ABS
PA2ES— Black ABS, Stainless Steel Fascia

ACTIVATION

Non-Latching
1x C/O Microswitch (ALARM)
1x Tactile switch (TAMPER)
1x Back tamper breakoff
No key - non-latching unit

KNOCKOUTS

4 (1 END, 1 BACK, 2 SIDE)

OVERALL DIMENSIONS

84mm X 65mm X 26mm

TEMPERATURE RANGE

-40 to +50 degrees Celsius

STANDARDS MET

EN 50131-1:2006+A3:2020
PD6662:2017

ELECTRICALLY RATED AS FOLLOWS

Max 15 Volts DC
Max current 500mA



KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: +44 (0) 2920 488 129
Fax: +44(0) 2920 489 132

Drawing #: PA2E*NL
Drawn: Gareth Carpenter
Date: 01/11/2025
Revision: 1

All dimensions in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of infringement will be pursued.