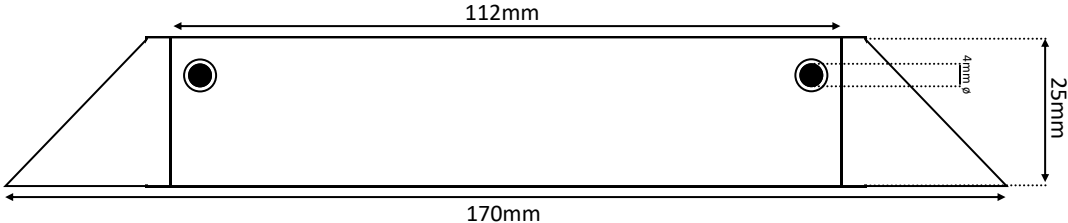
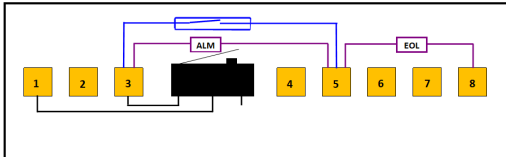
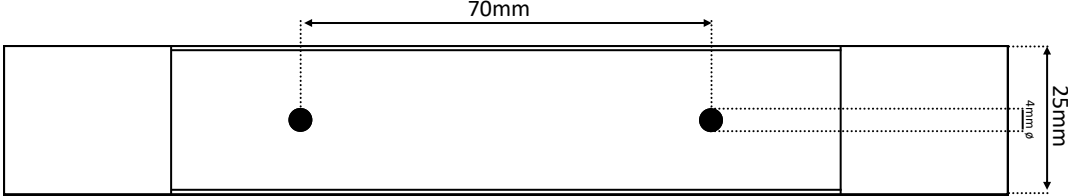


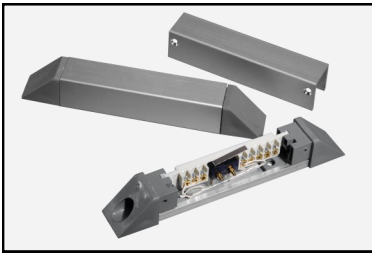


LATERAL	CONTACT & MAGNET 		DESCRIPTION Grade 2, Class II 8 terminal heavy duty surface contact. Single reed, normally closed. <i>(Complete circuit when magnet present).</i> VARIANTS PDM10xy - Where xy is desired EOL/Alarm resistors. E.g: PDM104K76K8 ACTIVATION Reed switch, ~50mm operating gap. Tamper switch, operates on lid removal WIRING 8x Brass screw terminals MATERIALS Anodised AA15 aluminium casting. Ferrite/Alnico V magnet. Rhodium reed. TEMPERATURE RANGE -40 to +50 degrees Celsius. ELECTRICALLY RATED AS FOLLOWS 500mA Max 1 – 100v DC. 125v AC Max. TERMINAL DIAGRAM 	
	BOTTOM			
		TOP		 NOTE CABLE ENTRY HOLE NOT PRESENT ON MAGNET
	ENDS			 NOTE CABLE ENTRY HOLE NOT PRESENT ON MAGNET   PHOTO

 KNIGHT FIRE & SECURITY	Unit 84 Seawall Road Ind. Estate Cardiff UK CF24 5TH Tel: +44 (0) 2920 488 129 Fax: +44(0) 2920 489 132	Drawing #: PDM10 Drawn: Gareth Carpenter Date: 01/10/2025 Revision: 1	All dimensions in mm Do not scale	 © Knight Fire & Security Products Ltd All cases of infringement will be pursued.