

### *New hassle-free smart control panel for your home*

The akubela HyPanel Supreme, a 12.35-inch smart home control center featuring a high-definition 2560 × 1600 resolution screen with ultra-slim bezels. Its minimalist metal exterior seamlessly integrates high-end aesthetics, delivering a visually stunning experience. Powered by Android 12, it supports various smart home control apps and achieves seamless integration between third-party apps and the original interface. It also boasts built-in sensors for temperature, humidity, gesture recognition, light, enhancing data collection and analysis capabilities. It is designed to bring whole-house smart automation, providing an outstanding user experience.

### *At a Glance*

- 12.35 inch touchscreen with metal frame
- 2.5K(2560×1600) UHD display
- Built in with 6 channels dry contact, 8 digital inputs, RS485 port
- Multi networks supported: Wi-Fi 6, Bluetooth 5.0, ZigBee 3.0, etc.
- Built in with multiple sensors
- Android 12 OS
- Intercom, ZigBee gateway and smart home control panel in one device
- Compatible with various third-party devices and platforms



## Basic Information

- |                                                                                                                                                                                                                   |                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| • Model Number: PHX1-ST                                                                                                                                                                                           | • Operation System: Android 12                    |
| • Power Supply: 12-24VDC                                                                                                                                                                                          | • RAM/ROM: 4GB/32GB                               |
| • Digital Input: 8 gang(dry contact input)<br>0-5VDC, rated current: <100mA                                                                                                                                       | • Wi-Fi: WiFi6, @2.4GHz/5GHz                      |
| • Dry Contact Output:<br>4 gang, 100 ~ 240VAC, rated current: 3A<br>Wire Range: 1.5 ~ 2.5mm <sup>2</sup> (15 ~ 13AWG)<br>2 gang, 0-30VDC, rated current: 2A<br>Wire gauge: 0.08 ~ 0.5mm <sup>2</sup> (28 ~ 20AWG) | • Bluetooth: Bluetooth 5.0                        |
| • RS485 Port: Supported                                                                                                                                                                                           | • Ethernet Port: 1xRJ45, 10/100Mbps adaptive      |
|                                                                                                                                                                                                                   | • ZigBee: ZigBee 3.0                              |
|                                                                                                                                                                                                                   | • ZigBee Sub-Device Limit: 128                    |
|                                                                                                                                                                                                                   | • Microphone: Dual microphones, -26dBFS           |
|                                                                                                                                                                                                                   | • Speaker: Dual speakers, 4Ω/2W                   |
|                                                                                                                                                                                                                   | • Camera: 5-megapixel camera with privacy shutter |

## Appearance

- Material: Metal frame
- Screen: 12.35" multi-touch screen
- Screen Resolution: 2560×1600 pixels
- Screen Brightness: 400 cd/m<sup>2</sup>

## Sensors Built In

- Gesture Recognition Sensor: Support
- Proximity Sensor: 30~100cm
- Light Sensor: Low-level lux detection
- Temperature Sensor:  $\pm 1^{\circ}\text{C}$ , range:  $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- Humidity Sensor:  $\pm 5\%$ , range: 10% ~ 90%RH, without condensation


## Working Environment


- Environment: For indoor use only
- Working Humidity: 10% ~ 90%RH, without condensation
- Working Temperature:  $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- Storage Temperature:  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- IP Rating: IP20

## Installation


- Installation: Wall flush mounting
- Flush Mounted Module: EU/UK/US standard

## Product Dimension Diagram (mm)

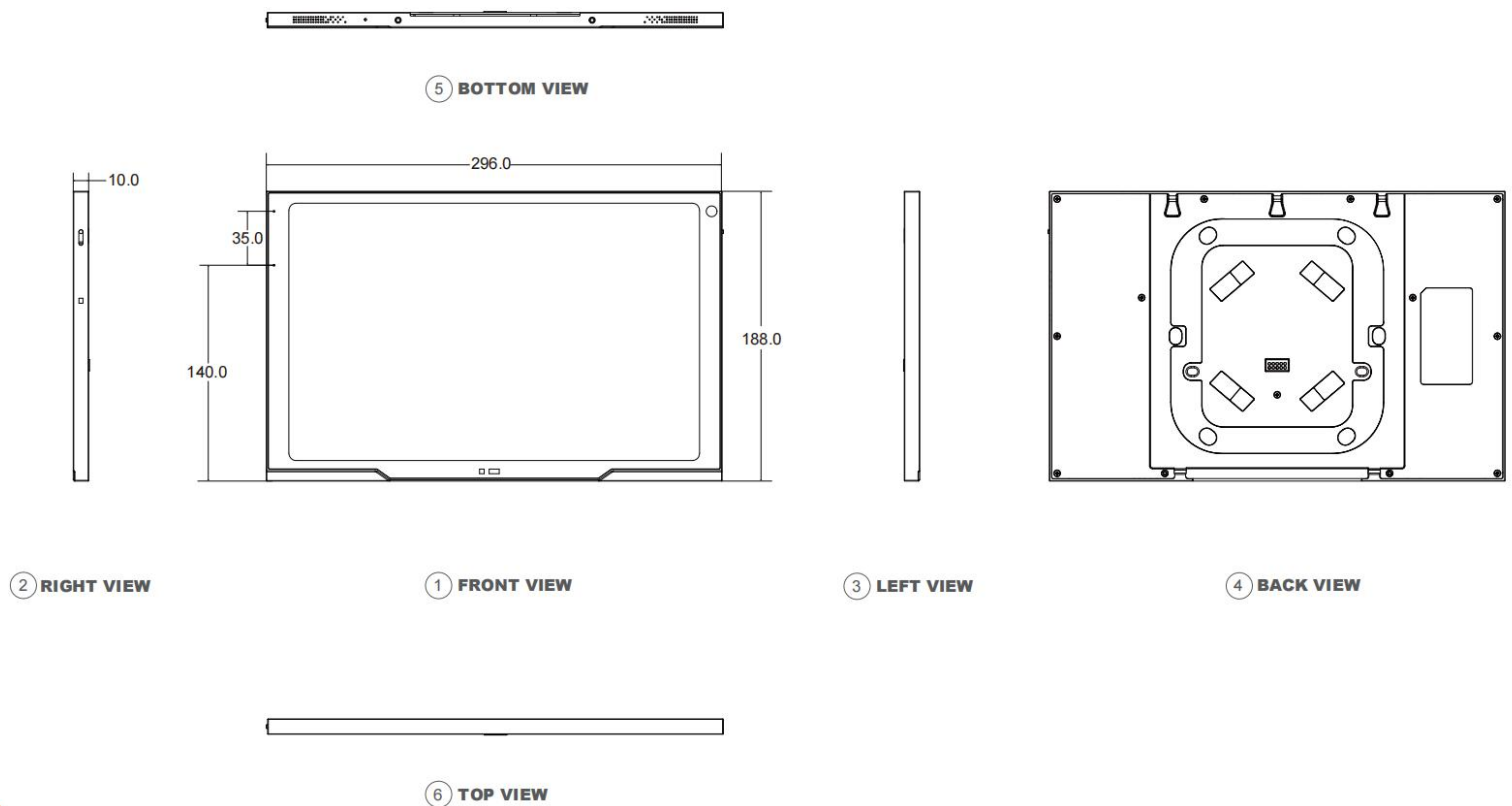





⑤ BOTTOM VIEW

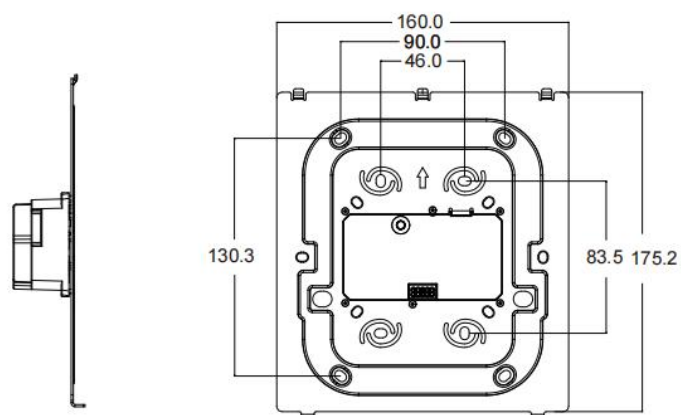


① FRONT VIEW




③ LEFT VIEW



② RIGHT VIEW



④ BACK VIEW



⑥ TOP VIEW